


# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**

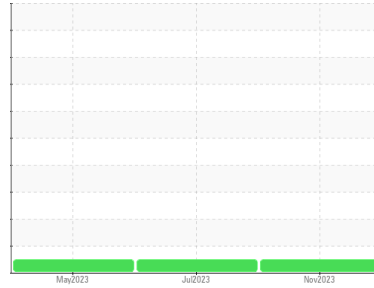

Area  
**G.LOPES CONSTRUCTION INC./ON-ROAD**  
 Machine Id  
**363**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0109769</b>	PCA0098429	PCA0090792
Sample Date	Client Info			<b>15 Nov 2023</b>	19 Jul 2023	02 May 2023
Machine Age	mls	Client Info		<b>894000</b>	886000	878000
Oil Age	mls	Client Info		<b>894000</b>	886000	878000
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>43</b>	36	24
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>1</b>	1	0
Lead	ppm	ASTM D5185m	>40	<b>2</b>	3	8
Copper	ppm	ASTM D5185m	>330	<b>3</b>	6	7
Tin	ppm	ASTM D5185m	>15	<b>0</b>	1	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>3</b>	2	1
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	2	0
Molybdenum	ppm	ASTM D5185m	60	<b>56</b>	61	55
Manganese	ppm	ASTM D5185m	0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>850</b>	904	890
Calcium	ppm	ASTM D5185m	1070	<b>970</b>	1086	1002
Phosphorus	ppm	ASTM D5185m	1150	<b>922</b>	991	939
Zinc	ppm	ASTM D5185m	1270	<b>1108</b>	1185	1174
Sulfur	ppm	ASTM D5185m	2060	<b>2918</b>	3120	2705

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>3</b>	3	5
Sodium	ppm	ASTM D5185m		<b>3</b>	3	10
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	3	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>2.2</b>	2.5	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.8</b>	8.2	7.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.8</b>	23.4	17.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.8</b>	17.0	15.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>9.82</b>	10.55	10.00









# OIL ANALYSIS REPORT

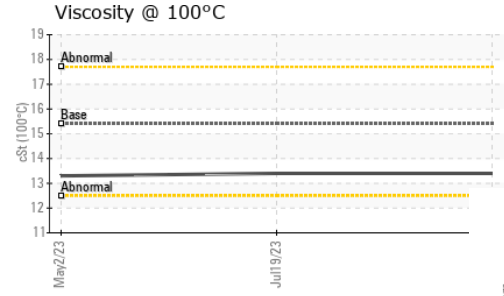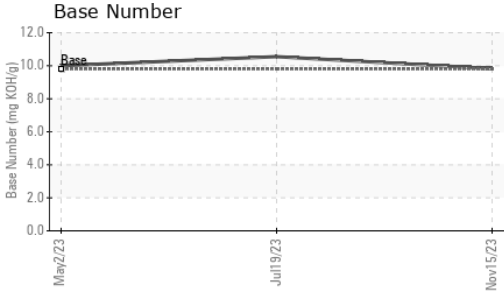

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.4</b>	13.4	13.3

### GRAPHS

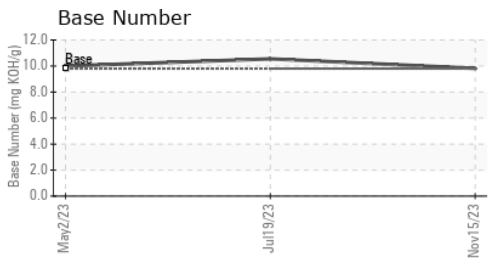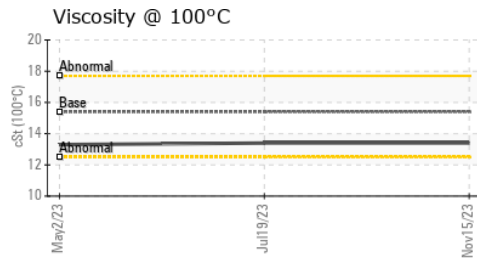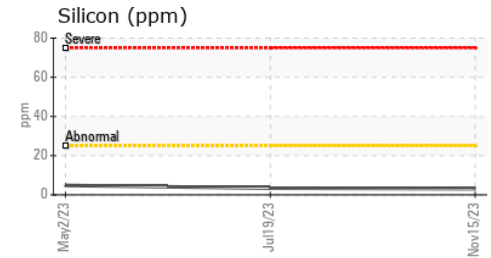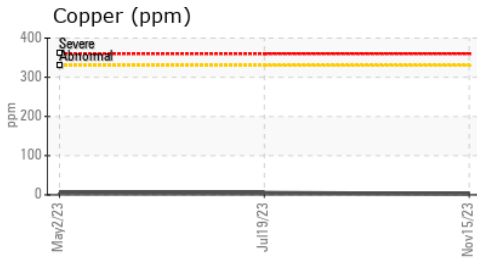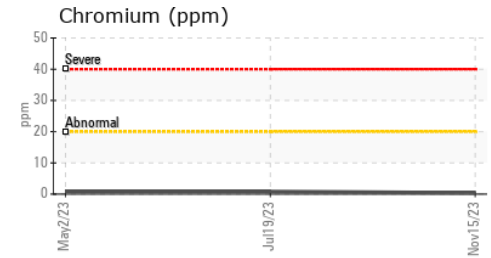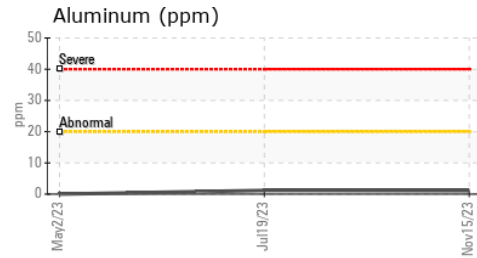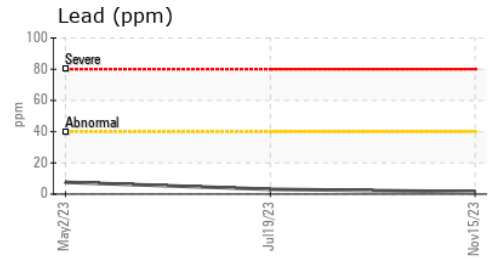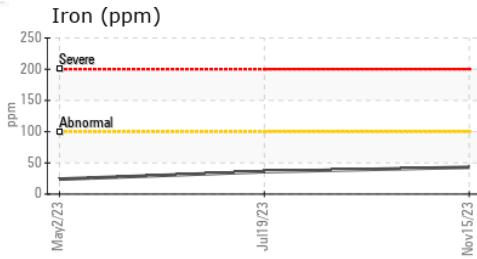

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0109769 **Received** : 17 Nov 2023  
**Lab Number** : **06011096** **Diagnosed** : 20 Nov 2023  
**Unique Number** : 10750240 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**G LOPES CONSTRUCTION**  
 565 WINTHROP ST  
 TAUNTON, MA  
 US 02780  
 Contact: BUTCH MCGRATH  
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: