


OIL ANALYSIS REPORT

Sample Rating Trend

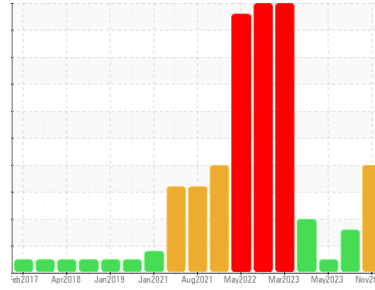

Area
Off-Road
Machine Id
E72
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. We recommend an early resample to monitor this condition.

Wear

Cylinder, crank, or cam shaft wear is indicated. Valve wear is indicated.

Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0098395	PCA0090818	PCA0098525
Sample Date	Client Info	15 Nov 2023	19 Jun 2023	17 May 2023
Machine Age	hrs	9078	8185	8185
Oil Age	hrs	7000	6107	6107
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >2.1	<1.0	<1.0	<1.0
Water	WC Method >0.21	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >51	▲ 107	▲ 76	18
Chromium	ppm ASTM D5185m >11	7	5	2
Nickel	ppm ASTM D5185m >5	▲ 26	▲ 17	5
Titanium	ppm ASTM D5185m	<1	<1	<1
Silver	ppm ASTM D5185m >3	0	0	<1
Aluminum	ppm ASTM D5185m >31	▲ 5	20	6
Lead	ppm ASTM D5185m >26	<1	0	0
Copper	ppm ASTM D5185m >26	4	2	<1
Tin	ppm ASTM D5185m >4	0	0	<1
Vanadium	ppm ASTM D5185m	0	<1	0
Cadmium	ppm ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<1	7	16
Barium	ppm ASTM D5185m 0	<1	0	0
Molybdenum	ppm ASTM D5185m 60	60	57	60
Manganese	ppm ASTM D5185m 0	1	2	<1
Magnesium	ppm ASTM D5185m 1010	899	928	980
Calcium	ppm ASTM D5185m 1070	1041	1029	1087
Phosphorus	ppm ASTM D5185m 1150	944	918	1010
Zinc	ppm ASTM D5185m 1270	1184	1162	1217
Sulfur	ppm ASTM D5185m 2060	2963	3420	3483

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >22	▲ 32	16	6
Sodium	ppm ASTM D5185m >31	22	35	11
Potassium	ppm ASTM D5185m >20	22	31	9

INFRA-RED


method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.7	0.4	0.1
Nitration	Abs/cm *ASTM D7624 >20	7.7	6.0	4.5
Sulfation	Abs/.1mm *ASTM D7415 >30	19.4	18.7	17.2

FLUID DEGRADATION


method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	15.3	14.7	12.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	9.08	9.53	17.38

OIL ANALYSIS REPORT


▲ Ferrous Alloys

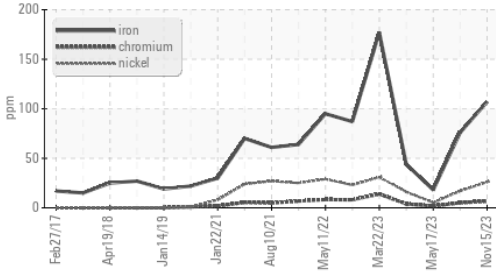


▲ Silicon (ppm)

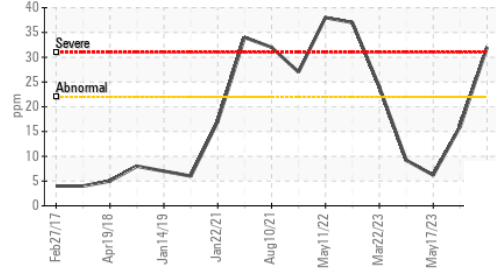


▲ Aluminum (ppm)

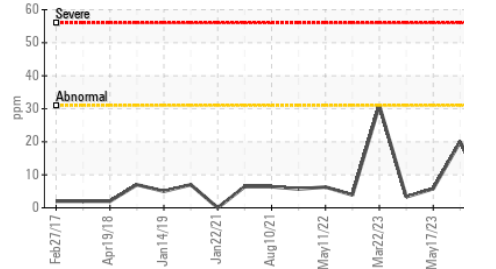

Base Number

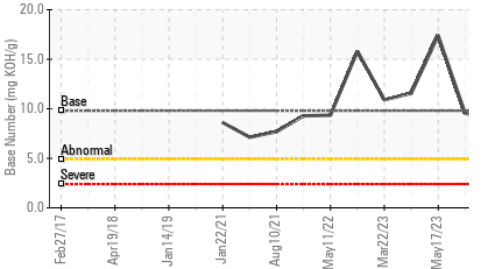

Viscosity @ 100°C

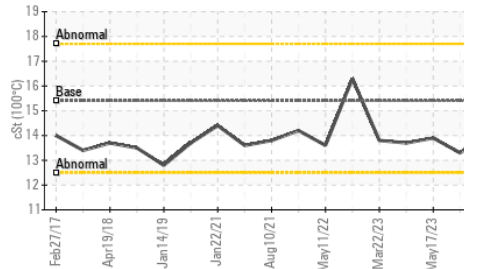


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	13.3

GRAPHS


▲ Iron (ppm)

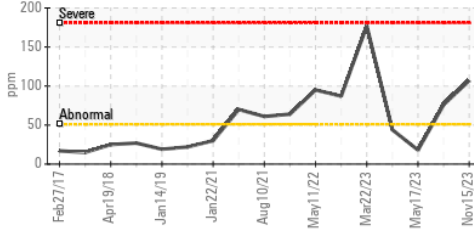


Lead (ppm)

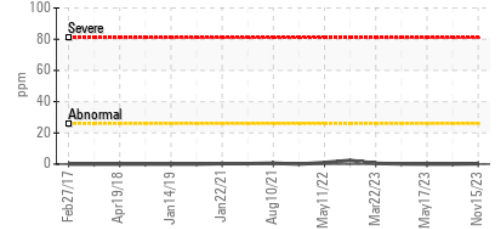


▲ Aluminum (ppm)

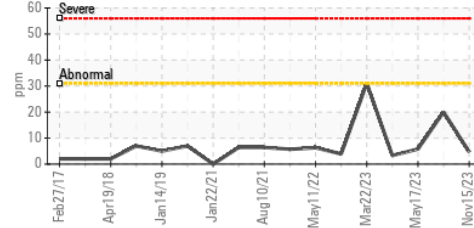


Chromium (ppm)

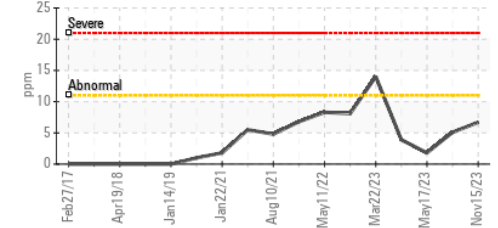


▲ Copper (ppm)

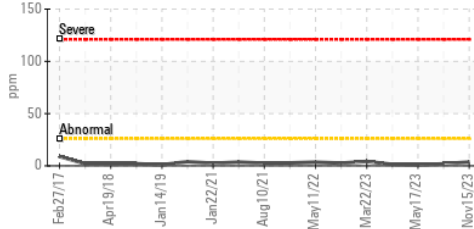


▲ Silicon (ppm)

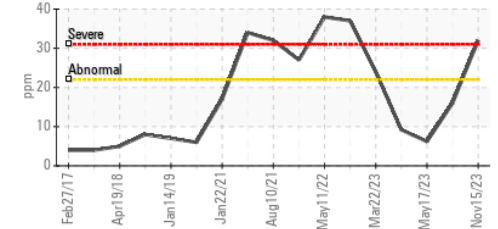

Viscosity @ 100°C

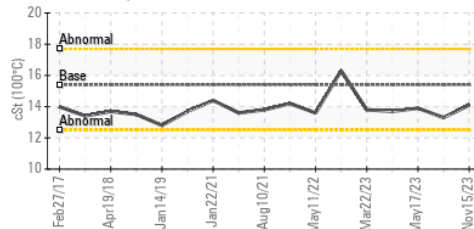

Base Number

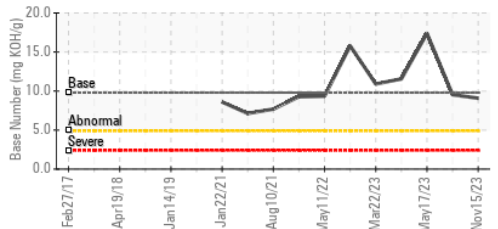

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0098395
Lab Number : 06011103
Unique Number : 10750247
Test Package : MOB 2

WIN Waste Innovations - Shop # - Taunton
 565 WINTHROP ST
 TAUNTON, MA
 US 02780
 Contact: Dave Wilson
 dwilson@win-waste.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: