




# OIL ANALYSIS REPORT

Sample Rating Trend

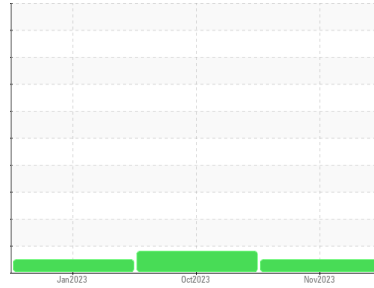

**NORMAL**



Machine Id  
**912014**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0101537</b>	GFL0093197	GFL0068620	
Sample Date	Client Info	<b>16 Nov 2023</b>	09 Oct 2023	11 Jan 2023	
Machine Age	hrs	Client Info	<b>4614</b>	4319	2376
Oil Age	hrs	Client Info	<b>4319</b>	2376	2376
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	MARGINAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>20</b>	▲ 95	35
Chromium	ppm ASTM D5185m >4	<b>&lt;1</b>	2	1
Nickel	ppm ASTM D5185m >2	<b>4</b>	8	4
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >25	<b>1</b>	1	<1
Lead	ppm ASTM D5185m >45	<b>0</b>	0	<1
Copper	ppm ASTM D5185m >85	<b>2</b>	5	10
Tin	ppm ASTM D5185m >4	<b>&lt;1</b>	1	1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>&lt;1</b>	3	<1
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>59</b>	60	61
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm ASTM D5185m 1010	<b>889</b>	920	900
Calcium	ppm ASTM D5185m 1070	<b>1067</b>	1043	1116
Phosphorus	ppm ASTM D5185m 1150	<b>956</b>	963	932
Zinc	ppm ASTM D5185m 1270	<b>1171</b>	1223	1212
Sulfur	ppm ASTM D5185m 2060	<b>2887</b>	2172	2451

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>4</b>	5	4
Sodium	ppm ASTM D5185m	<b>2</b>	7	4
Potassium	ppm ASTM D5185m >20	<b>2</b>	0	2

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.6</b>	1.7	1.1
Nitration	Abs/cm *ASTM D7624 >20	<b>7.6</b>	11.1	9.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.1</b>	24.5	21.8

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.5</b>	20.3	17.8
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.7</b>	4.6	6.0







# OIL ANALYSIS REPORT

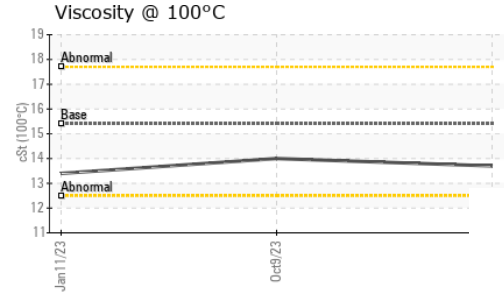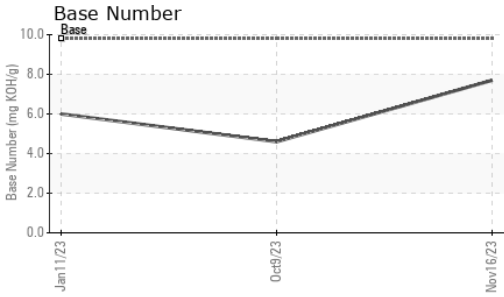

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	14.0	13.4

## GRAPHS

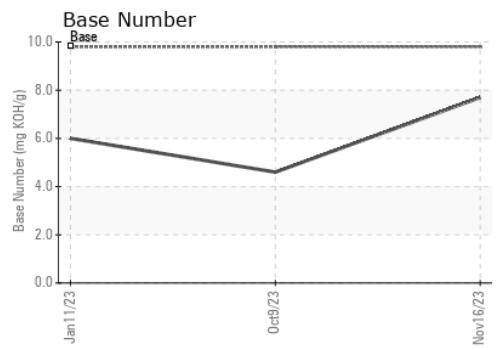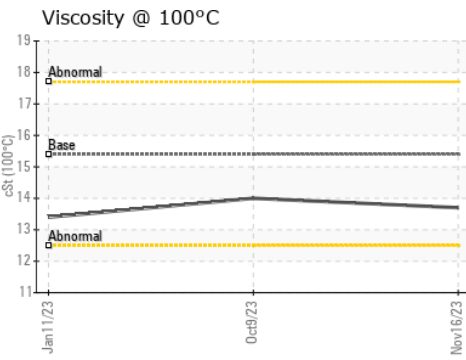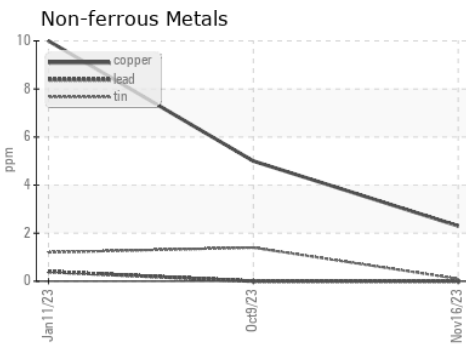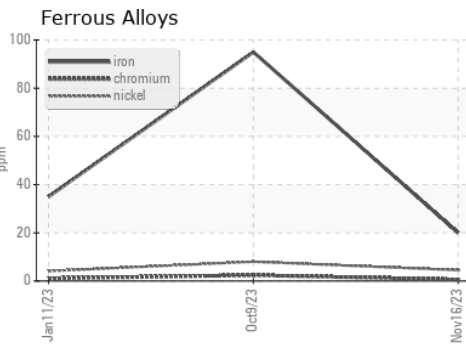

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0101537 **Received** : 20 Nov 2023  
**Lab Number** : **06011834** **Diagnosed** : 21 Nov 2023  
**Unique Number** : 10750978 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)