




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**934024**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

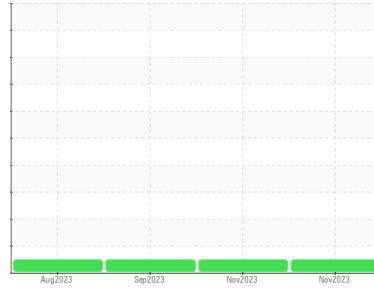

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0099893</b>	GFL0095169	GFL0090678	
Sample Date	Client Info	<b>15 Nov 2023</b>	09 Nov 2023	21 Sep 2023	
Machine Age	hrs	Client Info	<b>505</b>	472	318
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>Not Changed</b>	Not Changed	Not Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	<b>5</b>	6	33
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>2</b>	<1	<1
Titanium	ppm ASTM D5185m >5	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	<1	<1
Aluminum	ppm ASTM D5185m >25	<b>2</b>	3	0
Lead	ppm ASTM D5185m >40	<b>1</b>	3	<1
Copper	ppm ASTM D5185m >150	<b>&lt;1</b>	3	13
Tin	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 50	<b>46</b>	6	29
Barium	ppm ASTM D5185m 5	<b>0</b>	<1	3
Molybdenum	ppm ASTM D5185m 50	<b>48</b>	71	49
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	12
Magnesium	ppm ASTM D5185m 560	<b>553</b>	734	800
Calcium	ppm ASTM D5185m 1510	<b>1442</b>	2054	1313
Phosphorus	ppm ASTM D5185m 780	<b>780</b>	960	761
Zinc	ppm ASTM D5185m 870	<b>981</b>	1244	936
Sulfur	ppm ASTM D5185m 2040	<b>2650</b>	3251	2914

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>5</b>	10	30
Sodium	ppm ASTM D5185m	<b>5</b>	1	4
Potassium	ppm ASTM D5185m >20	<b>2</b>	3	4

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	<b>0.1</b>	0	0
Nitration	Abs/cm *ASTM D7624 >20	<b>8.0</b>	11.1	10.1
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.6</b>	24.5	20.3

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.4</b>	20.0	19.0
Base Number (BN)	mg KOH/g ASTM D2896 10.2	<b>6.8</b>	2.7	6.5







# OIL ANALYSIS REPORT

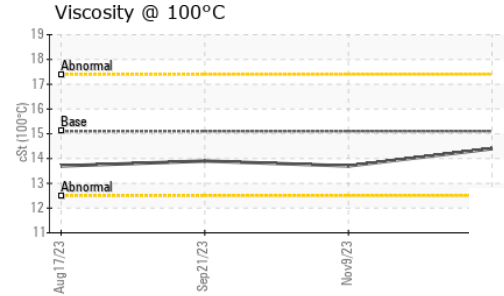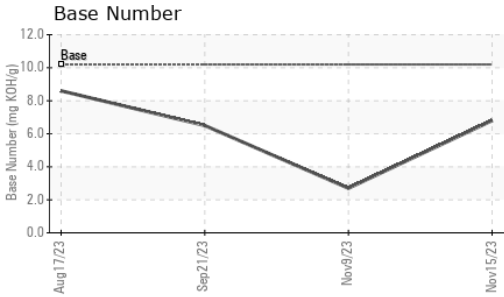

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	<b>14.4</b>	13.7	13.9

## GRAPHS

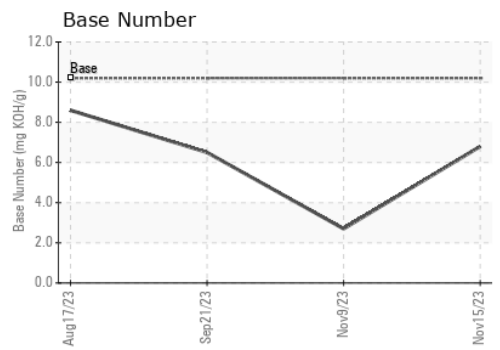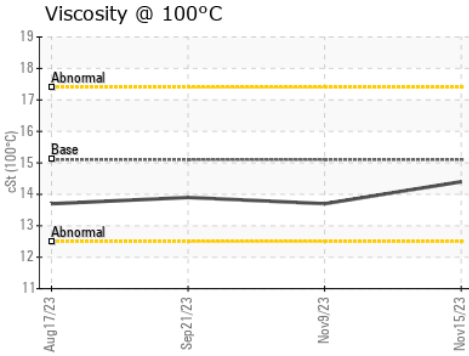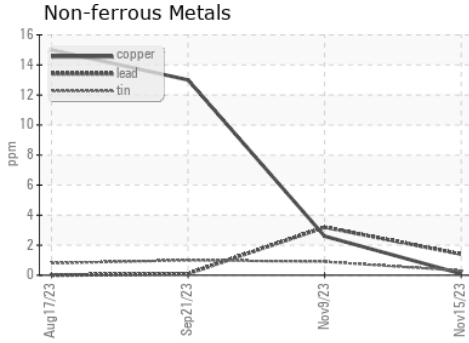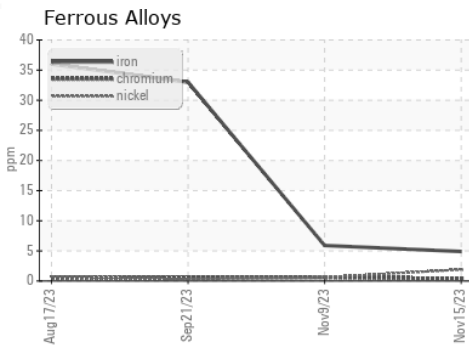

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0099893 **Received** : 20 Nov 2023  
**Lab Number** : **06012249** **Diagnosed** : 21 Nov 2023  
**Unique Number** : 10751393 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 836 - Kansas City Hauling**  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Robert Hart  
 rhart@gflenv.com  
 T: (580)461-1509  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)