




# OIL ANALYSIS REPORT

Sample Rating Trend

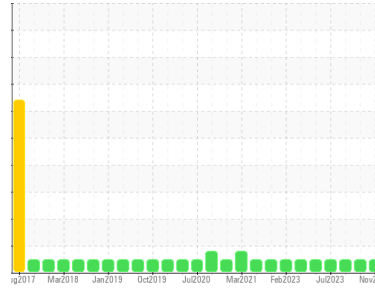

**NORMAL**



Machine Id  
**10699**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (5 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0088735</b>	GFL0097952	GFL0094328
Sample Date	Client Info		<b>02 Nov 2023</b>	23 Oct 2023	14 Sep 2023
Machine Age	hrs	Client Info	<b>2358</b>	2232	1948
Oil Age	hrs	Client Info	<b>423</b>	447	163
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>17</b>	20	11
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	3	2
Lead	ppm	ASTM D5185m >40	<b>2</b>	2	<1
Copper	ppm	ASTM D5185m >330	<b>2</b>	2	1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>7</b>	10	11
Barium	ppm	ASTM D5185m 0	<b>0</b>	3	0
Molybdenum	ppm	ASTM D5185m 60	<b>61</b>	76	63
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>816</b>	915	893
Calcium	ppm	ASTM D5185m 1070	<b>1139</b>	1306	1280
Phosphorus	ppm	ASTM D5185m 1150	<b>912</b>	1197	1020
Zinc	ppm	ASTM D5185m 1270	<b>1172</b>	1348	1277
Sulfur	ppm	ASTM D5185m 2060	<b>2720</b>	4118	3771

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	7	5
Sodium	ppm	ASTM D5185m	<b>2</b>	2	4
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1</b>	0.9	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.8</b>	10.3	7.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.5</b>	19.8	18.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.8</b>	17.0	14.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.1</b>	7.2	7.9







# OIL ANALYSIS REPORT

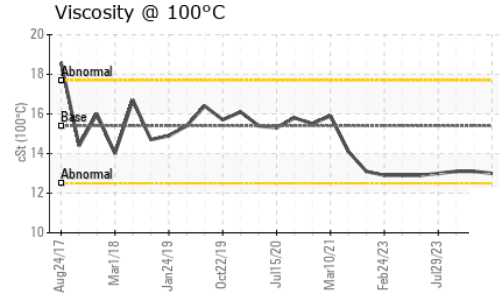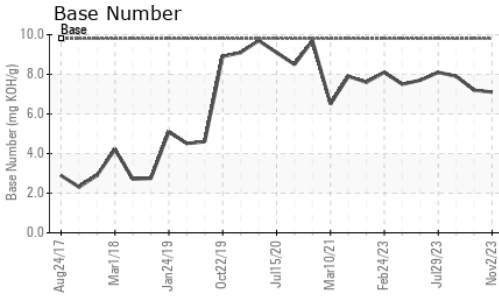

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.0</b>	13.1	13.1

## GRAPHS

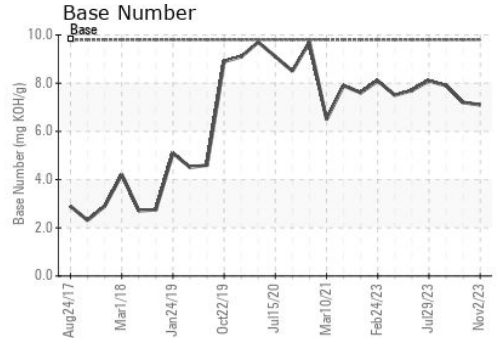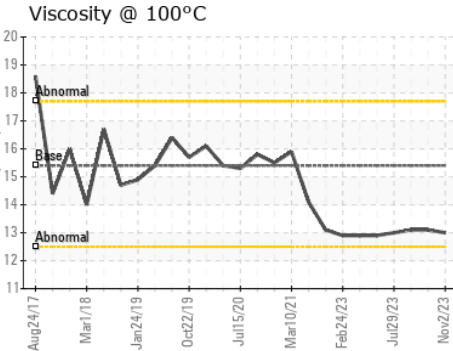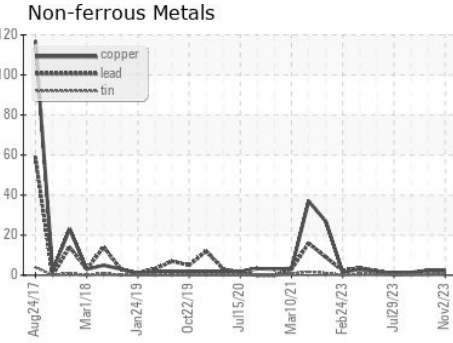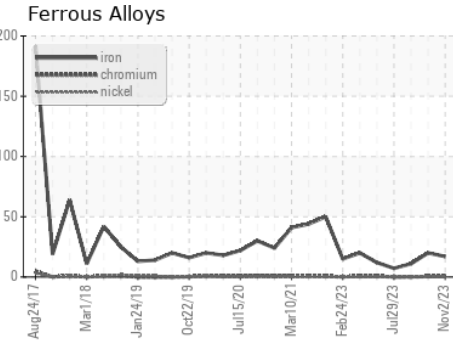

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0088735 **Received** : 20 Nov 2023  
**Lab Number** : **06012983** **Diagnosed** : 21 Nov 2023  
**Unique Number** : 10752127 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 010 - Stockbridge**  
 1280 Rum Creek Parkway  
 Stockbridge, GA  
 US 30281  
 Contact: JOSHUA TINKER  
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)