




# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**

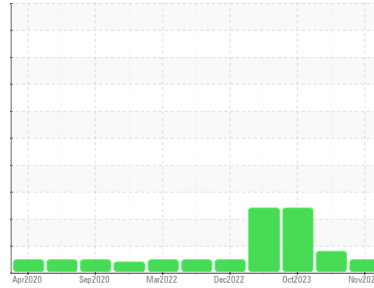

Machine Id  
**720022-310085**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0098617</b>  | GFL0093683  | GFL0093706  |
| Sample Date   | Client Info |             | <b>13 Nov 2023</b> | 29 Oct 2023 | 10 Oct 2023 |
| Machine Age   | hrs         | Client Info | <b>10414</b>       | 10270       | 10217       |
| Oil Age       | hrs         | Client Info | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info |             | <b>N/A</b>         | N/A         | Not Changd  |
| Sample Status |             |             | <b>NORMAL</b>      | MARGINAL    | SEVERE      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >5         | <b>&lt;1.0</b> | ▲ 2.3    | ● 9.5    |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >80  | <b>16</b>    | 6        | 23       |
| Chromium | ppm    | ASTM D5185m >5   | <b>1</b>     | <1       | <1       |
| Nickel   | ppm    | ASTM D5185m >2   | <b>&lt;1</b> | 0        | <1       |
| Titanium | ppm    | ASTM D5185m      | <b>&lt;1</b> | 0        | <1       |
| Silver   | ppm    | ASTM D5185m >3   | <b>0</b>     | <1       | 0        |
| Aluminum | ppm    | ASTM D5185m >30  | <b>6</b>     | 1        | 3        |
| Lead     | ppm    | ASTM D5185m >30  | <b>&lt;1</b> | 0        | 0        |
| Copper   | ppm    | ASTM D5185m >150 | <b>2</b>     | <1       | 2        |
| Tin      | ppm    | ASTM D5185m >5   | <b>0</b>     | 0        | <1       |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b>     | 0        | <1       |
| Cadmium  | ppm    | ASTM D5185m      | <b>&lt;1</b> | 0        | 0        |

## ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | 3        | 2        |
| Barium     | ppm    | ASTM D5185m 0    | <b>9</b>     | 0        | 12       |
| Molybdenum | ppm    | ASTM D5185m 60   | <b>58</b>    | 52       | 53       |
| Manganese  | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm    | ASTM D5185m 1010 | <b>868</b>   | 852      | 857      |
| Calcium    | ppm    | ASTM D5185m 1070 | <b>1020</b>  | 916      | 929      |
| Phosphorus | ppm    | ASTM D5185m 1150 | <b>994</b>   | 982      | 870      |
| Zinc       | ppm    | ASTM D5185m 1270 | <b>1162</b>  | 1141     | 1098     |
| Sulfur     | ppm    | ASTM D5185m 2060 | <b>3602</b>  | 2839     | 2585     |

## CONTAMINANTS

|           | method | limit/base      | current   | history1 | history2 |
|-----------|--------|-----------------|-----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >20 | <b>8</b>  | 6        | 8        |
| Sodium    | ppm    | ASTM D5185m     | <b>3</b>  | 4        | 7        |
| Potassium | ppm    | ASTM D5185m >20 | <b>17</b> | <1       | 5        |

## INFRA-RED



|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>0.2</b>  | 0.2      | 0.5      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>6.1</b>  | 6.2      | 10.4     |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>18.5</b> | 18.9     | 21.3     |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>14.9</b> | 15.8     | 20.8     |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8  | <b>9.2</b>  | 8.7      | 6.1      |







# OIL ANALYSIS REPORT

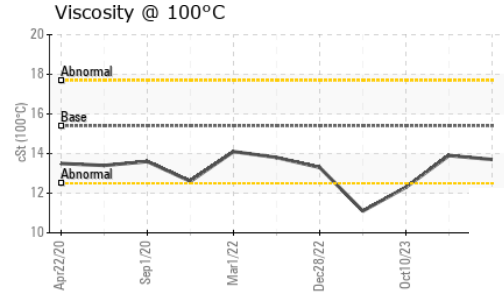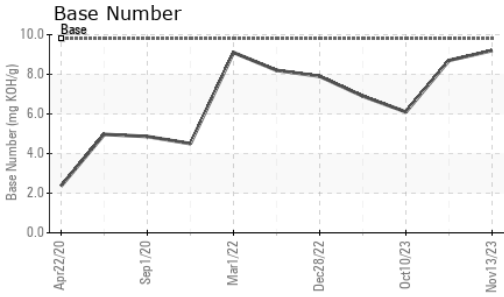

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2    |
|------------------|--------|------------|---------|----------|-------------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | 13.7     | 13.9 ▲ 12.3 |

## GRAPHS

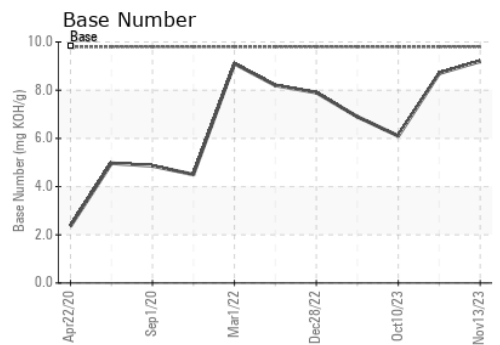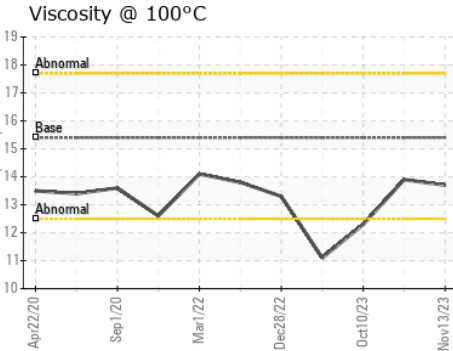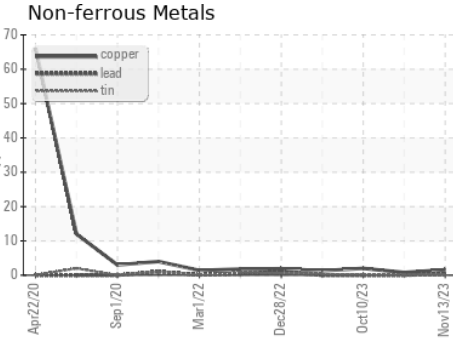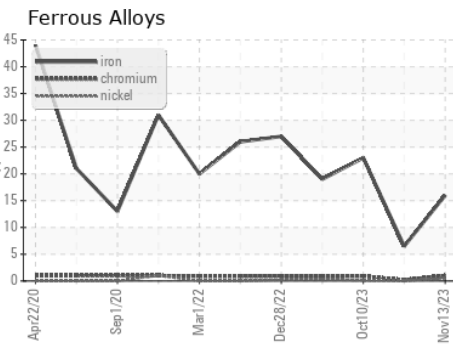

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0098617 **Received** : 20 Nov 2023  
**Lab Number** : 06013123 **Diagnosed** : 21 Nov 2023  
**Unique Number** : 10752267 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 837 - Harrison TS**  
 22820 S State Route 291  
 Harrisonville, MO  
 US 64701  
 Contact: BRYAN SWANSON  
 bryanswanson@gflenv.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)