




PROBLEM SUMMARY

Sample Rating Trend

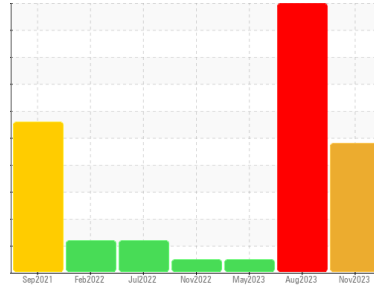


GLYCOL



Machine Id
362M
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Glycol Contamination

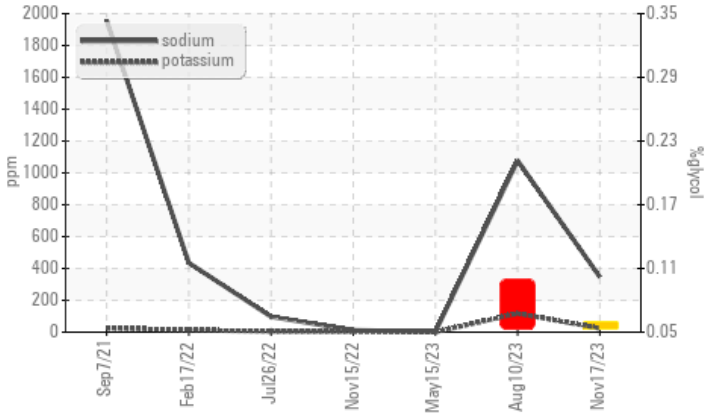

RECOMMENDATION

We advise that you check for the source of the coolant leak. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	SEVERE	NORMAL
Sodium	ppm	ASTM D5185m		▲ 347	▲ 1077	3
Potassium	ppm	ASTM D5185m	>20	▲ 24	▲ 117	0
Glycol	%	*ASTM D2982		▲ 0.06	● 0.10	NEG

Customer Id: GFL415
 Sample No.: GFL0101547
 Lab Number: 06013606
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

10 Aug 2023 Diag: Doug Bogart

GLYCOL



We advise that you check for the source of the coolant leak. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is positive. Elemental level of silicon (Si) above normal indicating ingress of seal material. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report



15 May 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



15 Nov 2022 Diag: Sean Felton

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

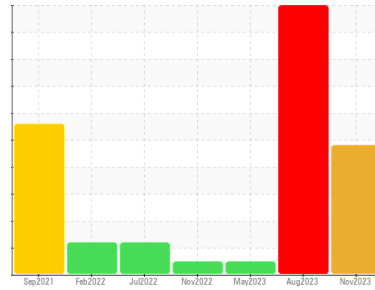

GLYCOL



Machine Id
362M

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Test for glycol is positive. There is a moderate concentration of glycol present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0101547	GFL0086651	GFL0081450
Sample Date	Client Info	17 Nov 2023	10 Aug 2023	15 May 2023
Machine Age	hrs	5441	12409	4242
Oil Age	hrs	12409	11568	11568
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ABNORMAL	SEVERE	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	30	57	9
Chromium	ppm ASTM D5185m >20	2	3	0
Nickel	ppm ASTM D5185m >2	<1	<1	0
Titanium	ppm ASTM D5185m >2	<1	<1	0
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >20	6	6	2
Lead	ppm ASTM D5185m >40	1	3	0
Copper	ppm ASTM D5185m >330	6	16	0
Tin	ppm ASTM D5185m >15	<1	<1	0
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	10	19	2
Barium	ppm ASTM D5185m 0	9	0	0
Molybdenum	ppm ASTM D5185m 60	75	119	58
Manganese	ppm ASTM D5185m 0	<1	1	0
Magnesium	ppm ASTM D5185m 1010	922	1045	932
Calcium	ppm ASTM D5185m 1070	1107	1250	1075
Phosphorus	ppm ASTM D5185m 1150	995	960	1029
Zinc	ppm ASTM D5185m 1270	1226	1438	1267
Sulfur	ppm ASTM D5185m 2060	3105	3804	3501

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	10	▲ 37	8
Sodium	ppm ASTM D5185m	▲ 347	▲ 1077	3
Potassium	ppm ASTM D5185m >20	▲ 24	▲ 117	0
Glycol	% *ASTM D2982	▲ 0.06	◆ 0.10	NEG

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	0.7	0.8	0.3
Nitration	Abs/cm *ASTM D7624 >20	10.9	13.1	6.7
Sulfation	Abs/.1mm *ASTM D7415 >30	22.6	25.2	19.6


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	18.5	22.6	15.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.1	7.2	9.0




OIL ANALYSIS REPORT

▲ Glycol Contamination

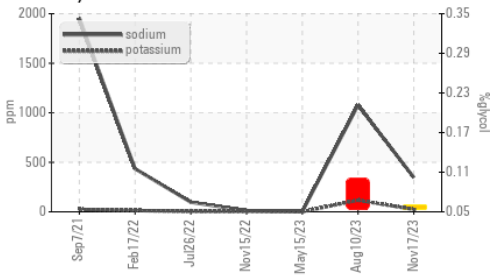

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


Base Number

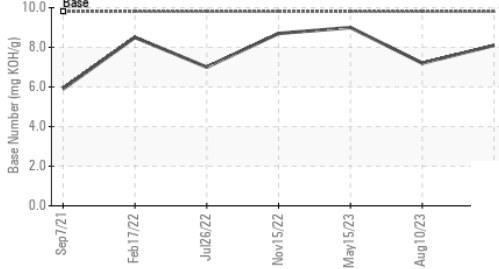


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	14.4	14.8	14.1

GRAPHS


Ferrous Alloys

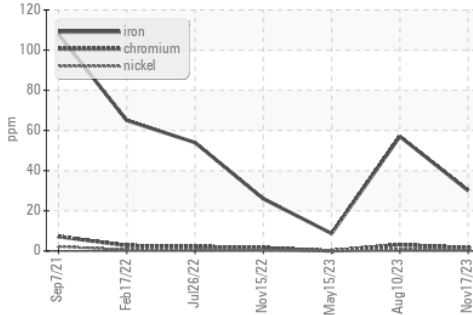


Viscosity @ 100°C

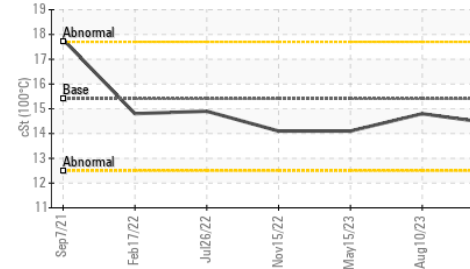


Non-ferrous Metals

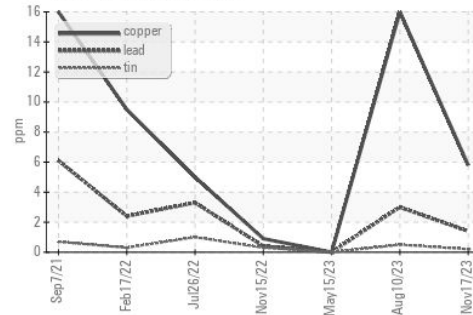

Viscosity @ 100°C

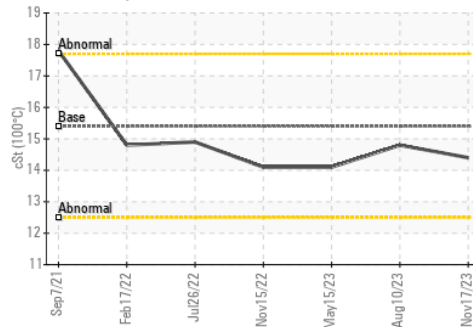

Base Number

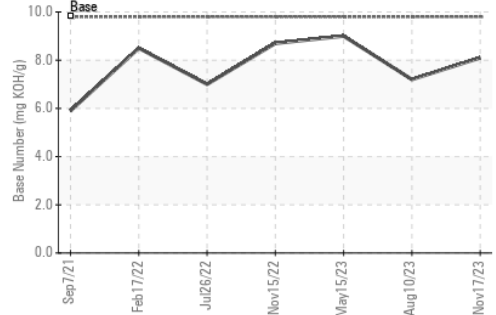

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0101547 **Received** : 21 Nov 2023
Lab Number : 06013606 **Diagnosed** : 24 Nov 2023
Unique Number : 10752750 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 415 - Michigan East
 6200 Elmridge
 Sterling Heights, MI
 US 48313
 Contact: Frank Wolak
 fwolak@gflenv.com
 T: (586)825-9514
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)