




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**(Llw2027)**  
Machine Id  
**429039 - 402454**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

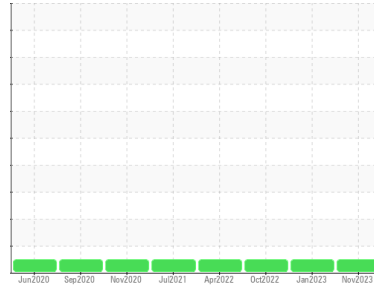

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0090960</b>	GFL0060276	GFL0060293
Sample Date	Client Info			<b>16 Nov 2023</b>	20 Jan 2023	10 Oct 2022
Machine Age	hrs	Client Info		<b>10530</b>	8716	8271
Oil Age	hrs	Client Info		<b>10530</b>	580	600
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>165	<b>13</b>	12	20
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	2	5
Lead	ppm	ASTM D5185m	>150	<b>2</b>	1	4
Copper	ppm	ASTM D5185m	>90	<b>2</b>	3	10
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>0</b>	<1	2
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>60</b>	59	64
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>1007</b>	932	1020
Calcium	ppm	ASTM D5185m	1070	<b>1066</b>	1037	1190
Phosphorus	ppm	ASTM D5185m	1150	<b>960</b>	975	1030
Zinc	ppm	ASTM D5185m	1270	<b>1283</b>	1193	1433
Sulfur	ppm	ASTM D5185m	2060	<b>2892</b>	3380	3062



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>35	<b>6</b>	4	7
Sodium	ppm	ASTM D5185m		<b>2</b>	3	2
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	4	10

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>7.5	<b>0.4</b>	0.3	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.0</b>	8.5	12.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.5</b>	20.0	23.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.5</b>	15.8	20.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.4</b>	8.6	7.8







# OIL ANALYSIS REPORT

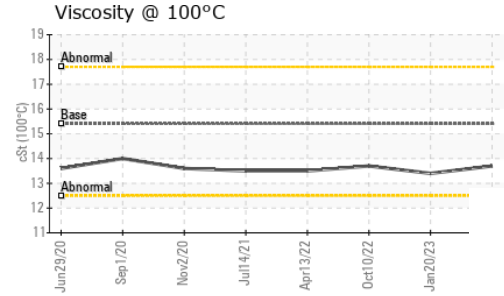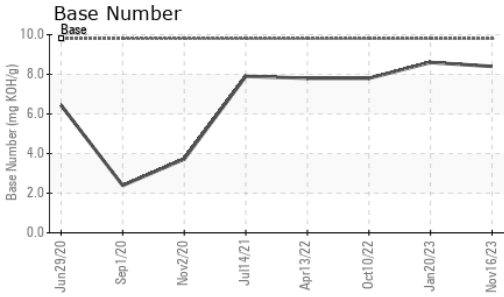

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	13.4	13.7

## GRAPHS

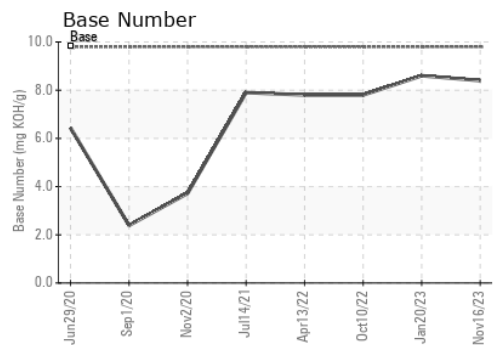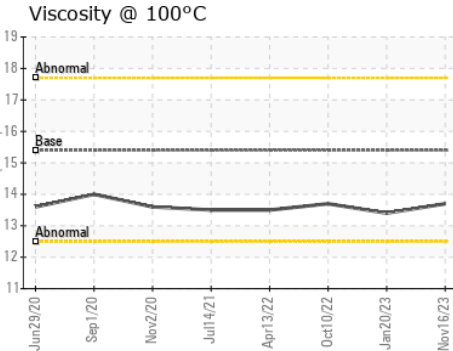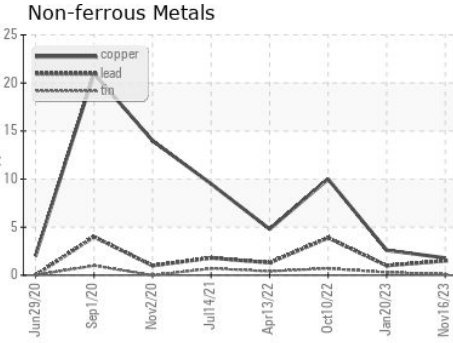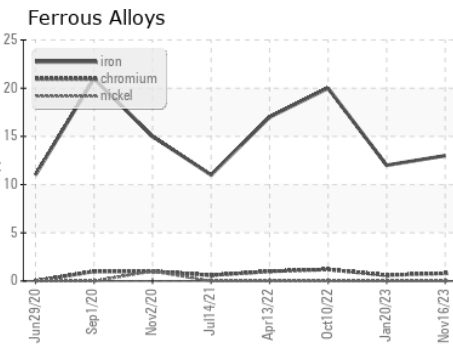

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0090960 **Received** : 21 Nov 2023  
**Lab Number** : **06014473** **Diagnosed** : 22 Nov 2023  
**Unique Number** : 10753617 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 813 - Rolling Meows Hauling**  
 3180 Hwy 63 South  
 Hazen, AR  
 US 72064  
 Contact: Brad Koenig  
 bkoenig@gflenv.com

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)