




# PROBLEM SUMMARY

Sample Rating Trend

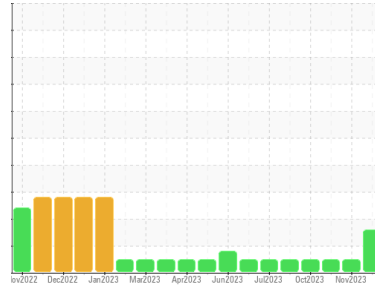


WEAR



Machine Id  
**413028**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Ferrous Alloys

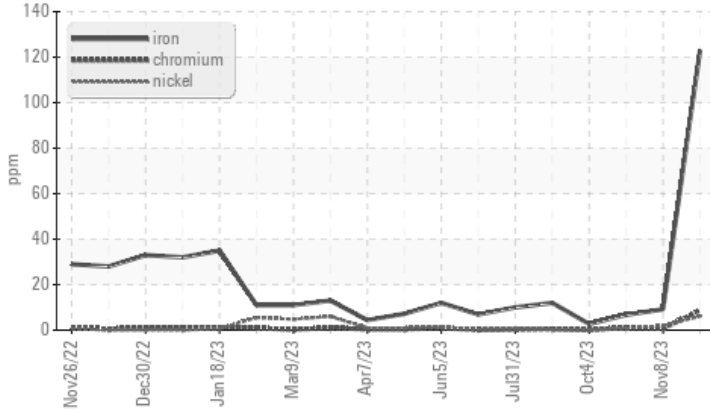

## RECOMMENDATION

No corrective action is recommended at this time.  
 Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	NORMAL	NORMAL	
Iron	ppm	ASTM D5185m	>120	▲ 123	9	7
Nickel	ppm	ASTM D5185m	>5	▲ 6	2	<1

Customer Id: GFL868  
 Sample No.: GFL0071667  
 Lab Number: 06014756  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

**08 Nov 2023 Diag: Wes Davis**

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



**10 Oct 2023 Diag: Wes Davis**

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



**04 Oct 2023 Diag: Wes Davis**

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

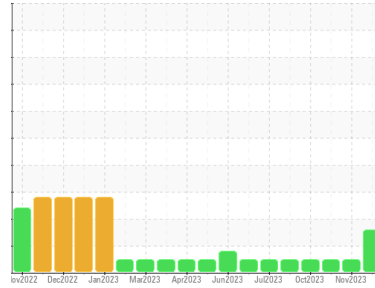

**WEAR**



Machine Id  
**413028**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

**Recommendation**  
 No corrective action is recommended at this time. Resample at the next service interval to monitor.

**Wear**  
 Cylinder, crank, or cam shaft wear is indicated. Valve wear is indicated.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0071667</b>	GFL0064607	GFL0094827
Sample Date	Client Info		<b>09 Nov 2023</b>	08 Nov 2023	10 Oct 2023
Machine Age	hrs	Client Info	<b>2455</b>	2455	2291
Oil Age	hrs	Client Info	<b>0</b>	971	807
Oil Changed	Client Info		<b>Not Chngd</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>▲ 123</b>	9	7
Chromium	ppm	ASTM D5185m >20	<b>9</b>	<1	1
Nickel	ppm	ASTM D5185m >5	<b>▲ 6</b>	2	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>15</b>	4	2
Lead	ppm	ASTM D5185m >40	<b>1</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>3</b>	13	13
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>1</b>	3	3
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>71</b>	58	58
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	0
Magnesium	ppm	ASTM D5185m 1010	<b>1111</b>	909	824
Calcium	ppm	ASTM D5185m 1070	<b>1205</b>	969	936
Phosphorus	ppm	ASTM D5185m 1150	<b>982</b>	956	891
Zinc	ppm	ASTM D5185m 1270	<b>1394</b>	1194	1068
Sulfur	ppm	ASTM D5185m 2060	<b>3121</b>	2732	2756

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>20</b>	6	5
Sodium	ppm	ASTM D5185m	<b>21</b>	4	0
Potassium	ppm	ASTM D5185m >20	<b>15</b>	8	6

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>2.3</b>	0.3	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.7</b>	7.6	5.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>25.4</b>	19.2	17.6


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.4</b>	15.2	13.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.1</b>	7.7	8.1




# OIL ANALYSIS REPORT

### ▲ Ferrous Alloys

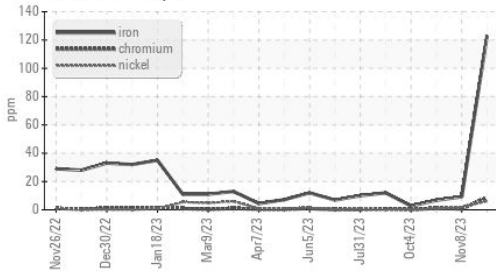

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


### Base Number

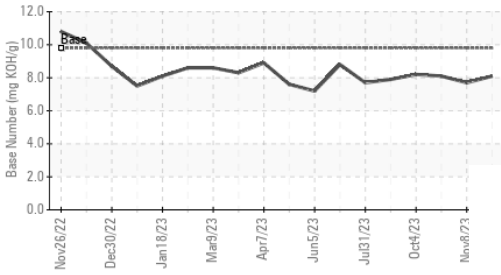


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	15.0	13.3	13.7

### GRAPHS


### Viscosity @ 100°C

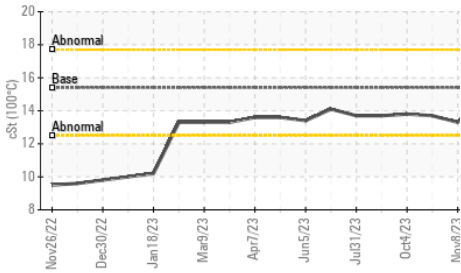


### ▲ Ferrous Alloys

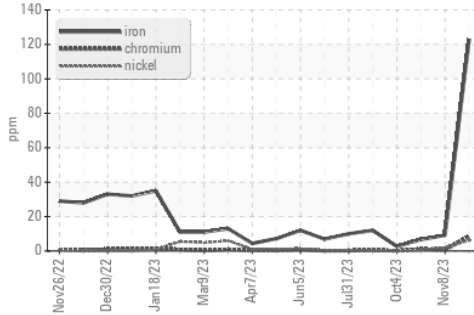


### Non-ferrous Metals

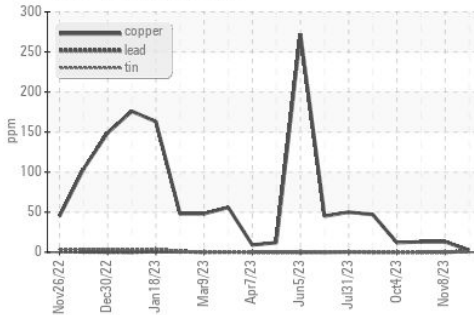

### Viscosity @ 100°C

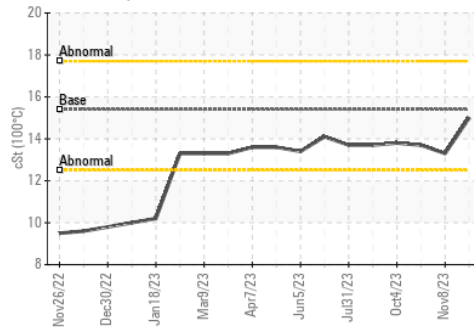

### Base Number

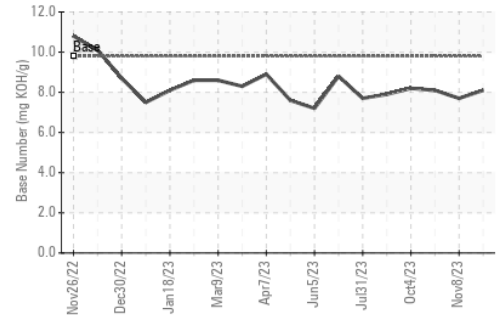

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0071667 **Received** : 22 Nov 2023  
**Lab Number** : 06014756 **Diagnosed** : 27 Nov 2023  
**Unique Number** : 10753900 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET

GFL Environmental - 868 - Childersburg Fines Hauling (Alpine)  
 13737 Plant Rd  
 Childersburg, AL  
 US 35044  
 Contact: JONATHAN WILLIAMS  
 jonathan.williams@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: