




# OIL ANALYSIS REPORT

Sample Rating Trend

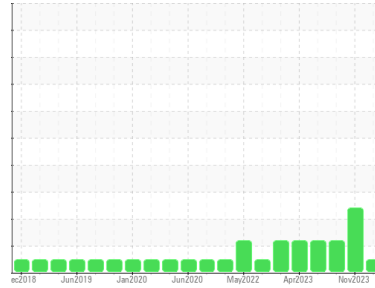

**NORMAL**



Machine Id  
**725051-361608**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Engine oil sample )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0100482</b>	GFL0100491	GFL0083437
Sample Date	Client Info		<b>16 Nov 2023</b>	14 Nov 2023	17 Aug 2023
Machine Age	hrs	Client Info	<b>21575</b>	21565	20925
Oil Age	hrs	Client Info	<b>21575</b>	21565	20925
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	ATTENTION

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>6</b>	34	24
Chromium	ppm	ASTM D5185m >4	<b>0</b>	1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>1</b>	3	4
Lead	ppm	ASTM D5185m >45	<b>&lt;1</b>	5	2
Copper	ppm	ASTM D5185m >85	<b>&lt;1</b>	3	4
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	5	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>64</b>	72	75
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>1037</b>	994	1080
Calcium	ppm	ASTM D5185m 1070	<b>1144</b>	1259	1206
Phosphorus	ppm	ASTM D5185m 1150	<b>1106</b>	1082	1158
Zinc	ppm	ASTM D5185m 1270	<b>1358</b>	1303	1411
Sulfur	ppm	ASTM D5185m 2060	<b>3471</b>	2998	3945

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>3</b>	7	5
Sodium	ppm	ASTM D5185m	<b>38</b>	▲ 226	▲ 240
Potassium	ppm	ASTM D5185m >20	<b>9</b>	▲ 42	17

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	1.3	0.8
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.4</b>	11.3	10.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.5</b>	23.8	22.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.6</b>	19.3	17.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.6</b>	8.3	8.3







# OIL ANALYSIS REPORT

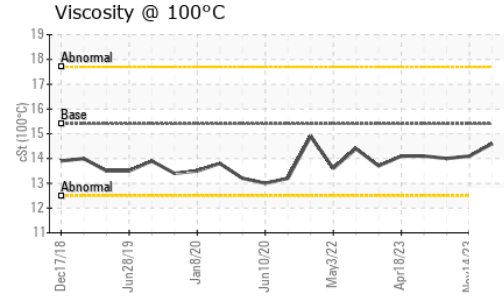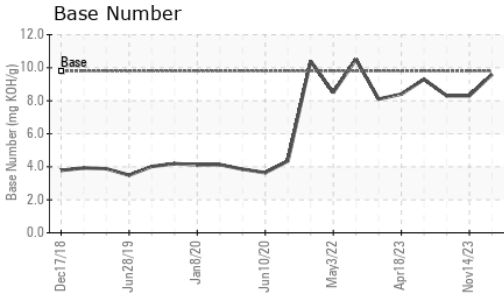

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.6</b>	14.1	14.0

## GRAPHS

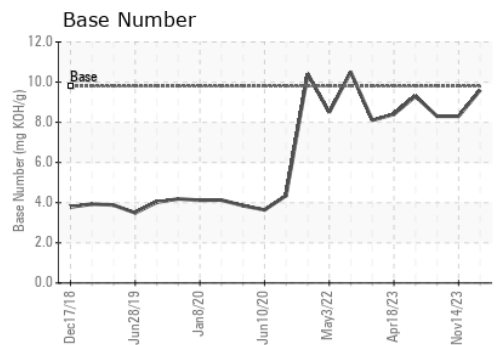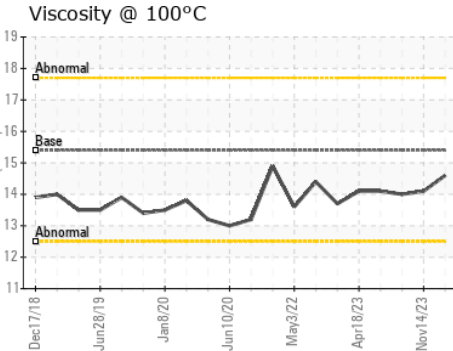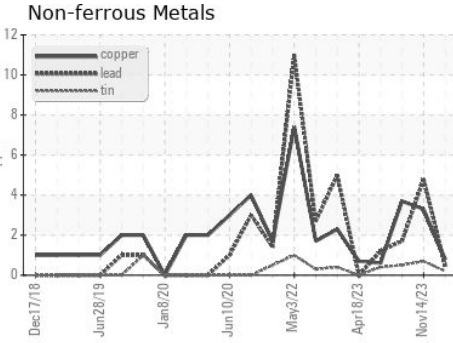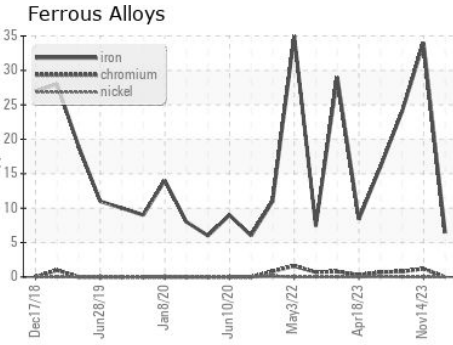

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0100482 **Received** : 22 Nov 2023  
**Lab Number** : 06014822 **Diagnosed** : 25 Nov 2023  
**Unique Number** : 10753966 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 865 - East Mount Hauling**  
 7213 East Mount Houston Road  
 Houston, TX  
 US 77050  
 Contact: Jose Gonzalez  
 jgonzalez2@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)