




OIL ANALYSIS REPORT

Sample Rating Trend

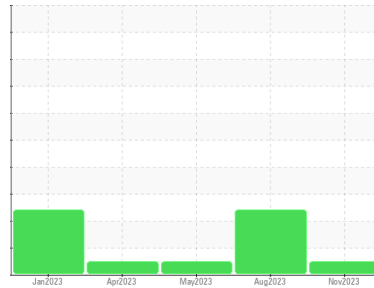

NORMAL



Machine Id
528075
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0092801	GFL0080831	GFL0080762
Sample Date	Client Info		15 Nov 2023	28 Aug 2023	17 May 2023
Machine Age	mls Client Info		206043	206043	0
Oil Age	mls Client Info		197633	206043	0
Oil Changed	Client Info		Not Changed	Not Changd	Not Changed
Sample Status			NORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>120	54	▲ 145	2
Chromium	ppm ASTM D5185m	>20	2	3	<1
Nickel	ppm ASTM D5185m	>5	0	<1	<1
Titanium	ppm ASTM D5185m	>2	<1	<1	0
Silver	ppm ASTM D5185m	>2	0	0	0
Aluminum	ppm ASTM D5185m	>20	4	6	2
Lead	ppm ASTM D5185m	>40	<1	0	<1
Copper	ppm ASTM D5185m	>330	4	4	0
Tin	ppm ASTM D5185m	>15	<1	<1	1
Vanadium	ppm ASTM D5185m		0	0	0
Cadmium	ppm ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	0	8	12	5
Barium	ppm ASTM D5185m	0	0	0	0
Molybdenum	ppm ASTM D5185m	60	70	72	59
Manganese	ppm ASTM D5185m	0	<1	1	<1
Magnesium	ppm ASTM D5185m	1010	1053	1032	952
Calcium	ppm ASTM D5185m	1070	1165	1124	1079
Phosphorus	ppm ASTM D5185m	1150	1119	1092	1066
Zinc	ppm ASTM D5185m	1270	1377	1286	1311
Sulfur	ppm ASTM D5185m	2060	3561	3852	3890

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>25	19	▲ 31	3
Sodium	ppm ASTM D5185m		114	132	<1
Potassium	ppm ASTM D5185m	>20	3	2	1
Glycol	% *ASTM D2982		0.0	0.0	NEG

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	>4	0.2	0.2	0.2
Nitration	Abs/cm *ASTM D7624	>20	4.8	4.7	5.8
Sulfation	Abs/.1mm *ASTM D7415	>30	17.6	17.0	18.6


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	12.7	12.3	14.1
Base Number (BN)	mg KOH/g ASTM D2896	9.8	9.8	9.4	8.5




OIL ANALYSIS REPORT


Glycol Contamination

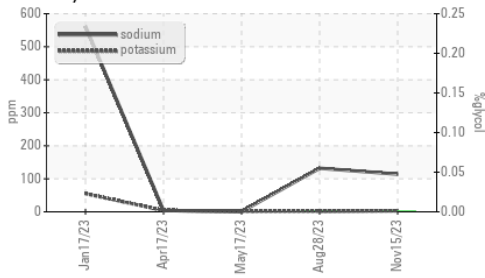

Base Number

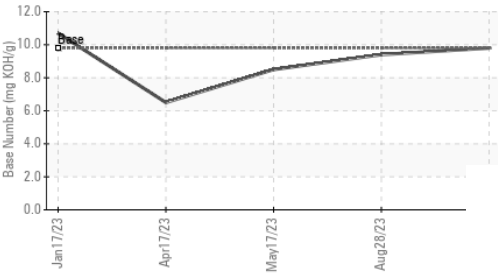

Viscosity @ 100°C

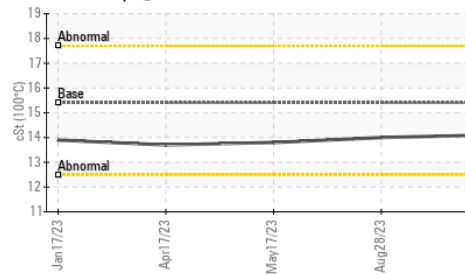


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	14.0

GRAPHS


Ferrous Alloys

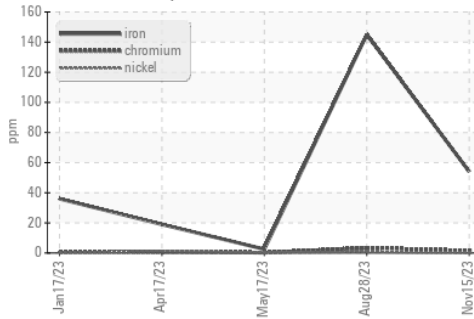


Non-ferrous Metals

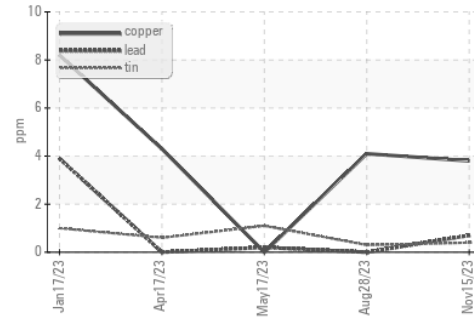

Viscosity @ 100°C

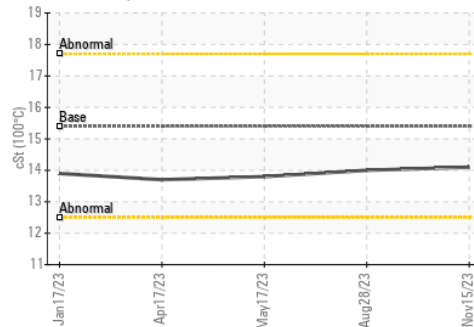

Base Number

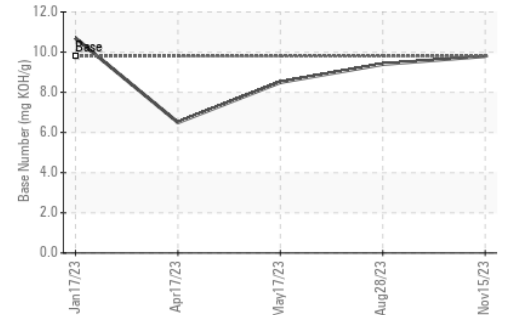

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0092801 **Received** : 22 Nov 2023
Lab Number : **06014828** **Diagnosed** : 24 Nov 2023
Unique Number : 10753972 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: Glycol)

GFL Environmental - 455 - Flint
 2051 W. Bristol Rd
 Flint Township, MI
 US 48507
 Contact: MARK WOMBLE
 mwomble@gflenv.com
 T: (586)825-9514
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)