




PROBLEM SUMMARY

Sample Rating Trend



FUEL



Machine Id
4548M
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

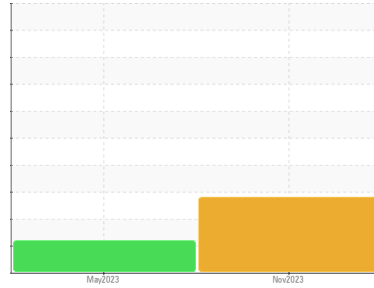

COMPONENT CONDITION SUMMARY

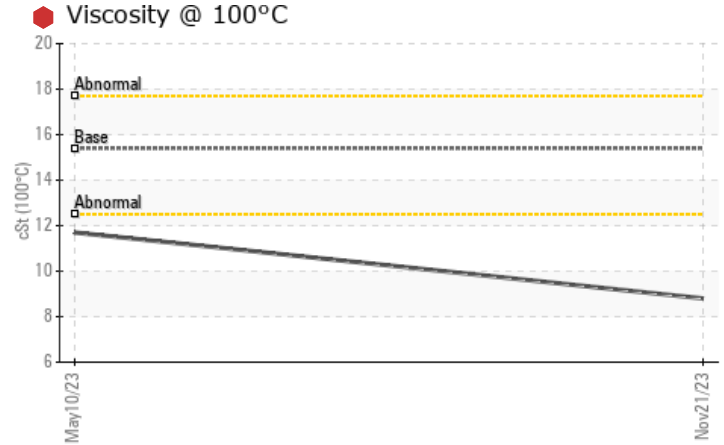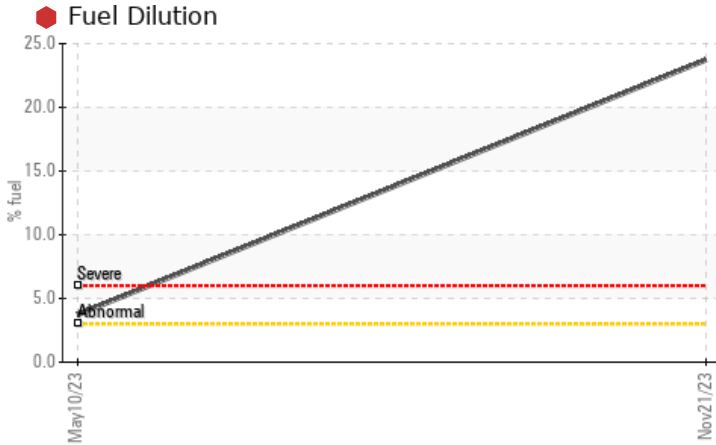

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	ABNORMAL	---
Fuel	%	ASTM D3524	>3.0	23.7	3.7	---
Visc @ 100°C	cSt	ASTM D445	15.4	8.8	11.7	---

Customer Id: GFL415
Sample No.: GFL0089172
Lab Number: 06016119
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

10 May 2023 Diag: Wes Davis

FUEL



The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

view report






OIL ANALYSIS REPORT

Sample Rating Trend

FUEL



Machine Id
4548M
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

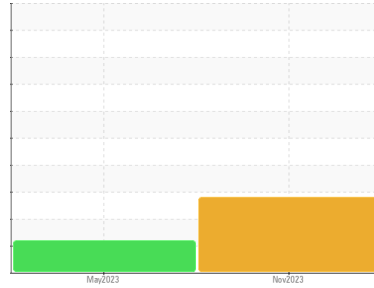

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0089172	GFL0069859	---
Sample Date	Client Info	21 Nov 2023	10 May 2023	---
Machine Age	hrs	9387	3943	---
Oil Age	hrs	2600	600	---
Oil Changed	Client Info	Changed	Changed	---
Sample Status		SEVERE	ABNORMAL	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	---
Glycol	WC Method	NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	11	14	---
Chromium	ppm ASTM D5185m >20	<1	<1	---
Nickel	ppm ASTM D5185m >2	0	0	---
Titanium	ppm ASTM D5185m >2	0	0	---
Silver	ppm ASTM D5185m >2	0	0	---
Aluminum	ppm ASTM D5185m >20	3	4	---
Lead	ppm ASTM D5185m >40	0	0	---
Copper	ppm ASTM D5185m >330	<1	<1	---
Tin	ppm ASTM D5185m >15	0	<1	---
Vanadium	ppm ASTM D5185m	<1	0	---
Cadmium	ppm ASTM D5185m	0	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	0	6	---
Barium	ppm ASTM D5185m 0	0	0	---
Molybdenum	ppm ASTM D5185m 60	44	48	---
Manganese	ppm ASTM D5185m 0	<1	<1	---
Magnesium	ppm ASTM D5185m 1010	730	755	---
Calcium	ppm ASTM D5185m 1070	800	873	---
Phosphorus	ppm ASTM D5185m 1150	735	874	---
Zinc	ppm ASTM D5185m 1270	997	1081	---
Sulfur	ppm ASTM D5185m 2060	2310	3065	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	2	5	---
Sodium	ppm ASTM D5185m	4	8	---
Potassium	ppm ASTM D5185m >20	6	2	---
Fuel	% ASTM D3524 >3.0	23.7	3.7	---

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	0.4	0.4	---
Nitration	Abs/cm *ASTM D7624 >20	9.2	7.7	---
Sulfation	Abs/.1mm *ASTM D7415 >30	18.4	20.0	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	16.1	15.5	---
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.2	7.0	---







OIL ANALYSIS REPORT

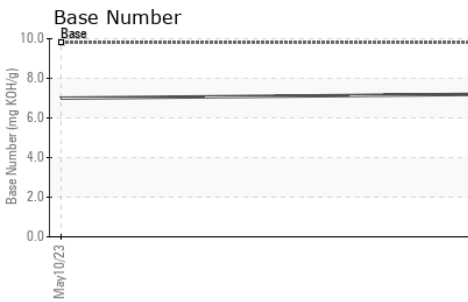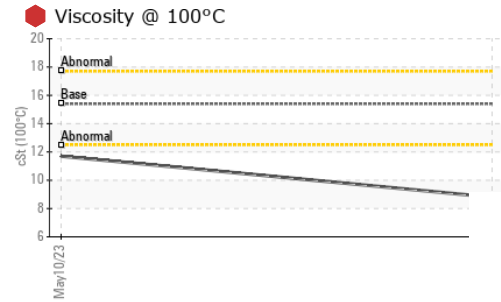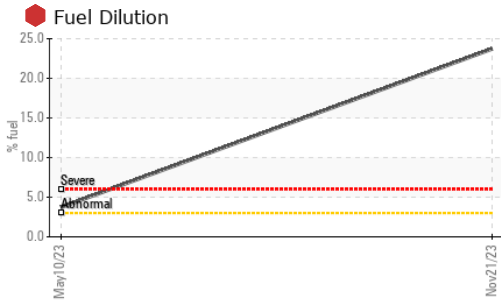

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	8.8	11.7

GRAPHS

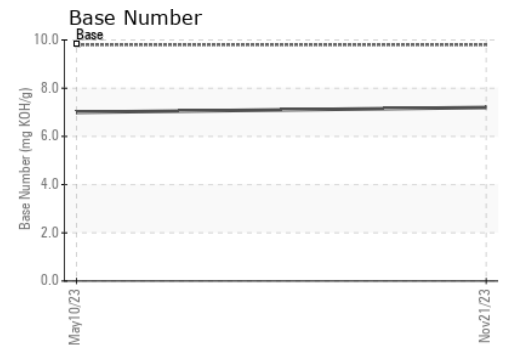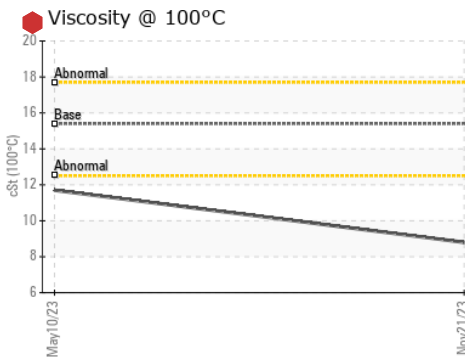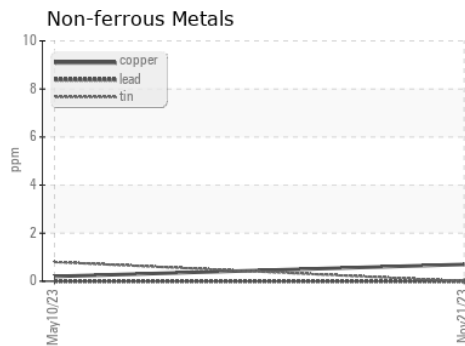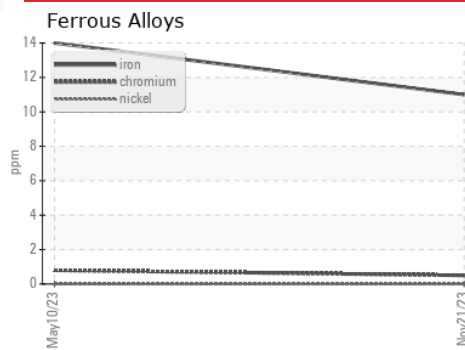

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0089172 **Received** : 24 Nov 2023
Lab Number : 06016119 **Diagnosed** : 28 Nov 2023
Unique Number : 10755263 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 415 - Michigan East
 6200 Elmridge
 Sterling Heights, MI
 US 48313
 Contact: Frank Wolak
 fwolak@gflenv.com
 T: (586)825-9514
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)