




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

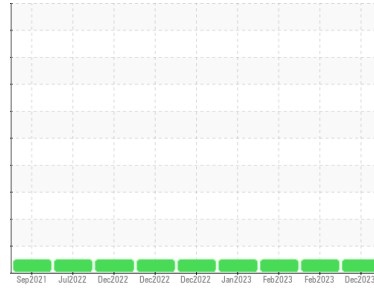

Machine Id  
**946020-260303**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: OIL SAMPLE )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0092072</b>	GFL0073634	GFL0068460
Sample Date	Client Info	<b>02 Dec 2023</b>	27 Feb 2023	07 Feb 2023
Machine Age	mls Client Info	<b>138289</b>	14291	14278
Oil Age	mls Client Info	<b>138289</b>	0	0
Oil Changed	Client Info	<b>Not Changed</b>	Not Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	<b>11</b>	5	15
Chromium	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	1
Nickel	ppm ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >9	<b>1</b>	2	1
Lead	ppm ASTM D5185m >30	<b>0</b>	6	4
Copper	ppm ASTM D5185m >35	<b>2</b>	<1	3
Tin	ppm ASTM D5185m >4	<b>0</b>	<1	1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 50	<b>21</b>	48	10
Barium	ppm ASTM D5185m 5	<b>2</b>	0	0
Molybdenum	ppm ASTM D5185m 50	<b>49</b>	54	59
Manganese	ppm ASTM D5185m 0	<b>0</b>	<1	2
Magnesium	ppm ASTM D5185m 560	<b>526</b>	579	593
Calcium	ppm ASTM D5185m 1510	<b>1445</b>	1686	1744
Phosphorus	ppm ASTM D5185m 780	<b>694</b>	821	737
Zinc	ppm ASTM D5185m 870	<b>870</b>	1028	1015
Sulfur	ppm ASTM D5185m 2040	<b>2541</b>	2475	2590

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >+100	<b>8</b>	6	6
Sodium	ppm ASTM D5185m	<b>8</b>	5	8
Potassium	ppm ASTM D5185m >20	<b>4</b>	<1	1

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	<b>0</b>	0.1	0.1
Nitration	Abs/cm *ASTM D7624 >20	<b>9.6</b>	7.2	13.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.4</b>	19.5	22.6

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.8</b>	15.8	18.6
Base Number (BN)	mg KOH/g ASTM D2896 10.2	<b>7.0</b>	8.0	5.3







# OIL ANALYSIS REPORT

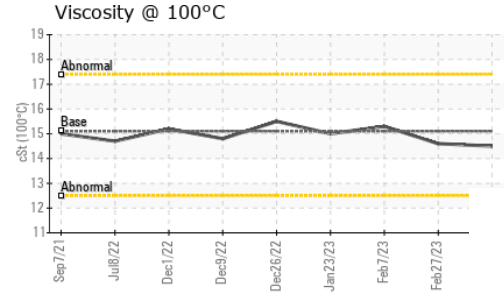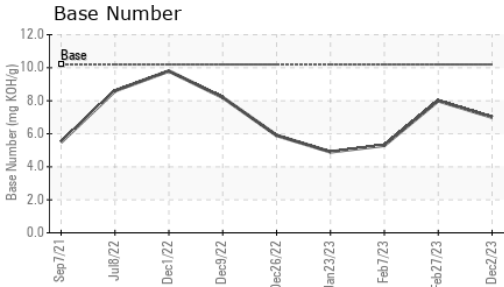

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	<b>14.5</b>	14.6	15.3

## GRAPHS

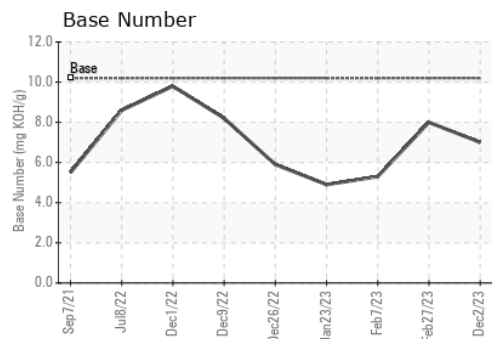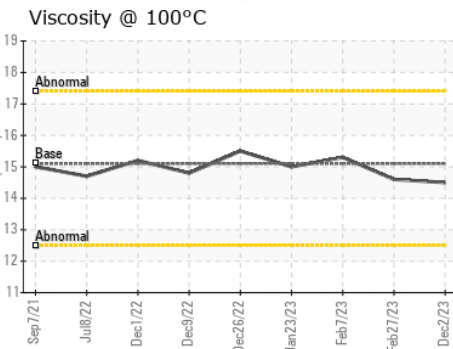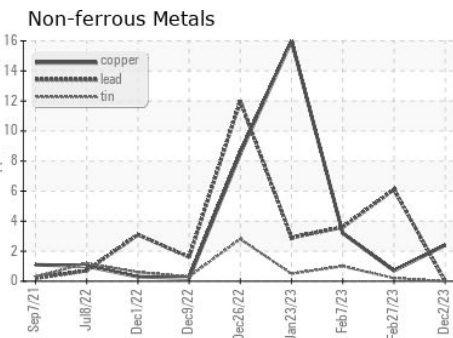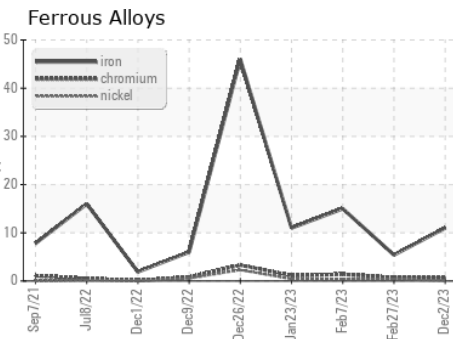

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0092072 **Received** : 05 Dec 2023  
**Lab Number** : **06025597** **Diagnosed** : 07 Dec 2023  
**Unique Number** : 10770097 **Diagnostician** : Sean Felton  
**Test Package** : FLEET

**GFL Environmental - 856 - Houston South**  
 8515 Highway 6 South  
 Houston, TX  
 US 77083  
 Contact: Apolinar Zacarias  
 pzacariascano@gflenv.com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)