




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

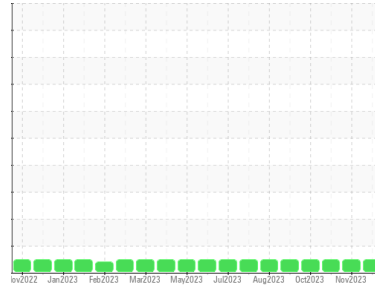

Machine Id  
**422089**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0101111</b>	GFL0098462	GFL0098477	
Sample Date	Client Info	<b>24 Nov 2023</b>	02 Nov 2023	17 Oct 2023	
Machine Age	hrs	Client Info	<b>0</b>	0	600
Oil Age	hrs	Client Info	<b>0</b>	0	600
Oil Changed	Client Info	<b>Not Changed</b>	Not Changed	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>6</b>	6	15
Chromium	ppm ASTM D5185m >4	<b>1</b>	<1	2
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >25	<b>2</b>	3	5
Lead	ppm ASTM D5185m >45	<b>&lt;1</b>	<1	3
Copper	ppm ASTM D5185m >85	<b>&lt;1</b>	<1	<1
Tin	ppm ASTM D5185m >4	<b>&lt;1</b>	0	1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>1</b>	2	<1
Barium	ppm ASTM D5185m 0	<b>0</b>	7	0
Molybdenum	ppm ASTM D5185m 60	<b>55</b>	61	52
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	0	1
Magnesium	ppm ASTM D5185m 1010	<b>905</b>	979	887
Calcium	ppm ASTM D5185m 1070	<b>1131</b>	1212	1028
Phosphorus	ppm ASTM D5185m 1150	<b>1006</b>	1164	885
Zinc	ppm ASTM D5185m 1270	<b>1220</b>	1322	1175
Sulfur	ppm ASTM D5185m 2060	<b>2861</b>	4005	2746

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>5</b>	4	7
Sodium	ppm ASTM D5185m	<b>2</b>	4	5
Potassium	ppm ASTM D5185m >20	<b>3</b>	2	11

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.1</b>	0.1	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>5.9</b>	5.3	7.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.4</b>	18.2	20.1

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.1</b>	13.9	16.0
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.3</b>	8.8	7.1







# OIL ANALYSIS REPORT

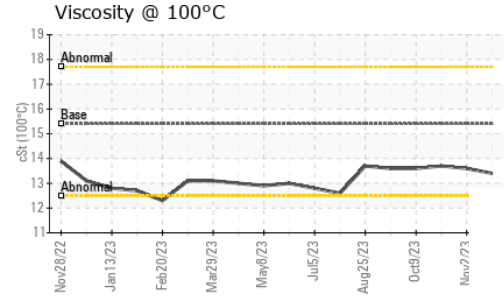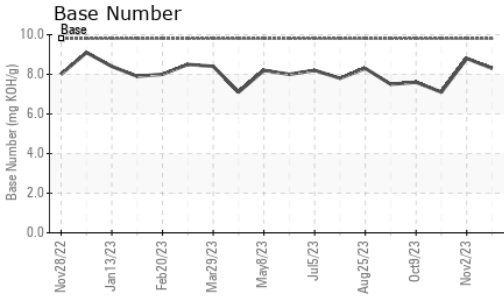

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.4</b>	13.6	13.7

## GRAPHS

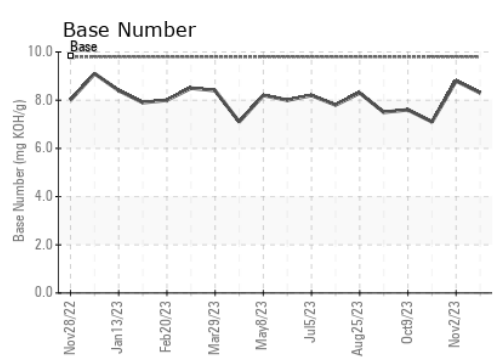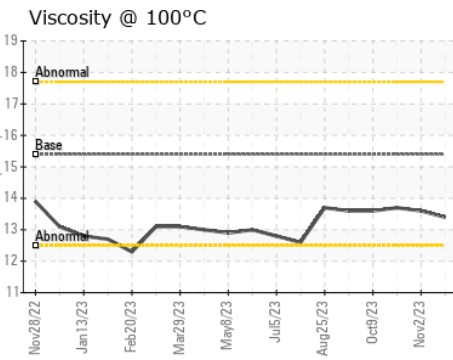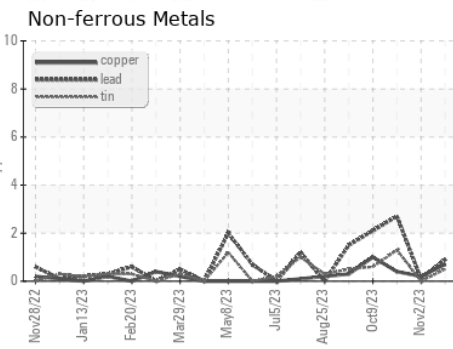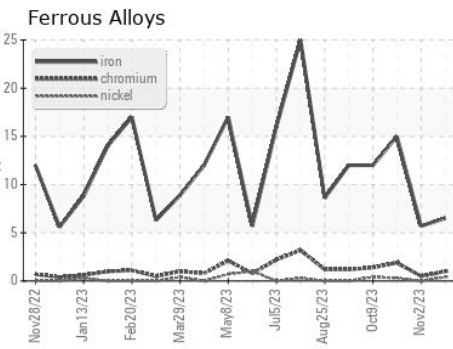

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0101111 **Received** : 06 Dec 2023  
**Lab Number** : **06026015** **Diagnosed** : 07 Dec 2023  
**Unique Number** : 10775806 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 846 - Mayfield Hauling**  
 3426 State Route 45  
 Mayfield, KY  
 US 42066  
 Contact: Jack Lindsey  
 jack.lindsey@gflenv.com  
 T: (270)970-3690  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)