




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

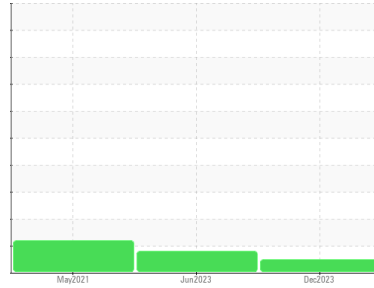

Machine Id  
**4670M**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0101443</b>	GFL0086695	GFL0018151
Sample Date	Client Info		<b>04 Dec 2023</b>	27 Jun 2023	10 May 2021
Machine Age	hrs	Client Info	<b>16983</b>	15621	8116
Oil Age	hrs	Client Info	<b>16983</b>	8116	8116
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>9</b>	33	47
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185m >2	<b>0</b>	1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >30	<b>1</b>	2	4
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >150	<b>&lt;1</b>	1	2
Tin	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	4
Barium	ppm	ASTM D5185m 0	<b>2</b>	0	<1
Molybdenum	ppm	ASTM D5185m 60	<b>56</b>	62	57
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>848</b>	945	851
Calcium	ppm	ASTM D5185m 1070	<b>1034</b>	1102	991
Phosphorus	ppm	ASTM D5185m 1150	<b>891</b>	1008	933
Zinc	ppm	ASTM D5185m 1270	<b>1125</b>	1286	1148
Sulfur	ppm	ASTM D5185m 2060	<b>3125</b>	2821	2160

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>4</b>	4	12
Sodium	ppm	ASTM D5185m	<b>4</b>	6	10
Potassium	ppm	ASTM D5185m >20	<b>2</b>	4	2
Fuel	%	ASTM D3524 >5	<b>0.0</b>	▲ 5.3	▲ 7.8

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.8	0.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.4</b>	10.4	12
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.2</b>	23.8	25

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.6</b>	20.8	22.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.2</b>	6.6	6







# OIL ANALYSIS REPORT

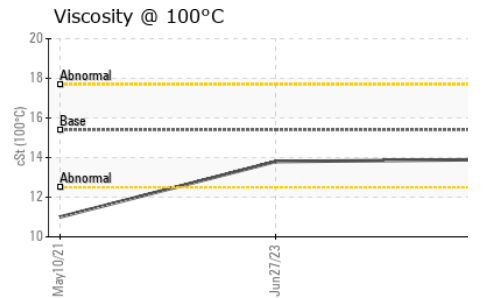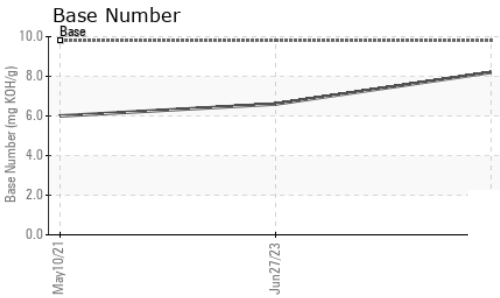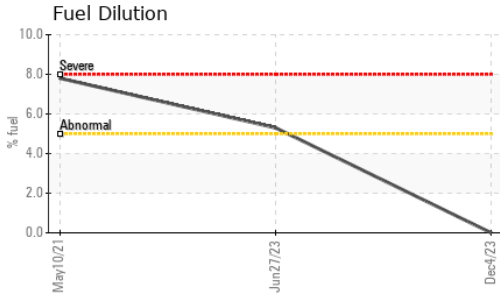

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.9</b>	13.8 ▲ 11.0

## GRAPHS

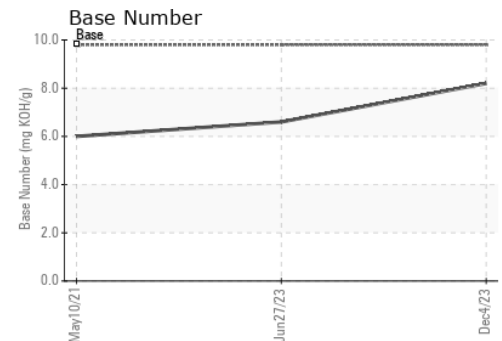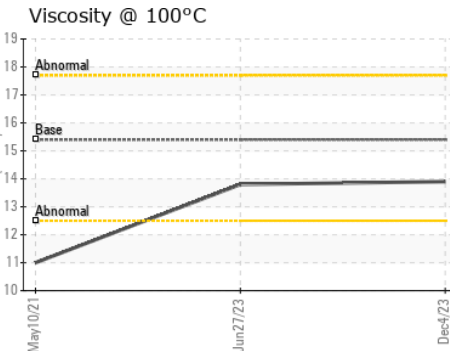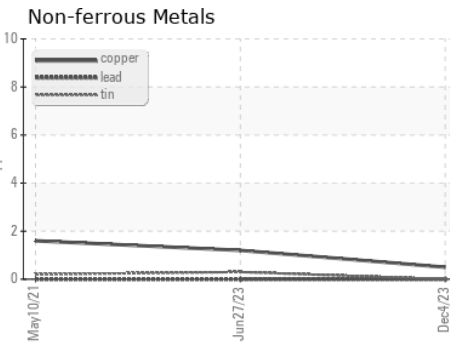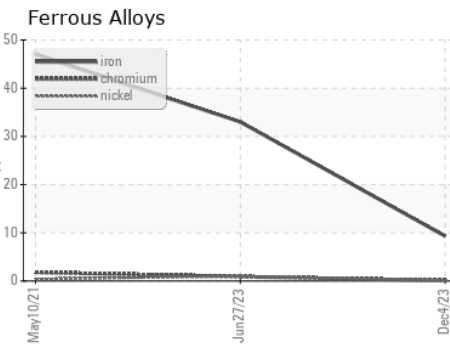

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0101443 **Received** : 06 Dec 2023  
**Lab Number** : **06026091** **Diagnosed** : 14 Dec 2023  
**Unique Number** : 10775882 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)