

## **OIL ANALYSIS REPORT**

Sample Rating Trend





DIAGNOSIS Recommendation

Contamination

Fluid Condition

Wear

oil.

Machine Id 7846M

Fluid

Resample at the next service interval to monitor.

There is no indication of any contamination in the


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the

oil is suitable for further service.

All component wear rates are normal.

Component Diesel Engine

## PETRO CANADA DURON SHP 15W40 (--- GAL)





SAMPLE INFOR	RMATION	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0096586	GFL0082787	GFL0081264
Sample Date		Client Info		29 Nov 2023	13 Sep 2023	29 Jun 2023
Machine Age	hrs	Client Info		9920	9339	8743
Oil Age	hrs	Client Info		600	600	600
Oil Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINA	ΓΙΟΝ	method	limit/base	current	history1	history2
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
WEAR METAI	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>120	20	9	15
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	<1	1
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	1	1	<1
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>330	1	<1	2
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<1	6	1
Barium	ppm	ASTM D5185m	0	2	0	0
Molybdenum	ppm	ASTM D5185m	60	59	59	60
Manganese	ppm	ASTM D5185m	0	0	<1	<1
Magnesium	ppm	ASTM D5185m	1010	870	966	871
Calcium	ppm	ASTM D5185m	1070	1079	1100	1056
Phosphorus	ppm	ASTM D5185m	1150	870	1046	937
Zinc	ppm	ASTM D5185m	1270	1129	1272	1179
Sulfur	ppm	ASTM D5185m	2060	2742	3727	2652
CONTAMINA	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	11	7	3
Sodium	ppm	ASTM D5185m		1	10	2
Potassium	ppm	ASTM D5185m	>20	3	2	1
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>4	0.7	0.3	0.8
Nitration	Abs/cm	*ASTM D7624	>20	8.5	5.6	8.5
0.16.15	Abs/.1mm	*ASTM D7415	>30	19.9	17.9	20.5
Sulfation	AU5/.111111	A31W D7413	>00	15.5	17.0	20.0

Oxidation

Abs/.1mm \*ASTM D7414 >25

Base Number (BN) mg KOH/g ASTM D2896 9.8

15.5

6.9

16.5


6.9


13.3

8.5




## **OIL ANALYSIS REPORT**

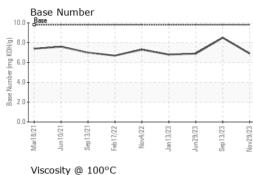



VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	13.9	13.8
GRAPHS						

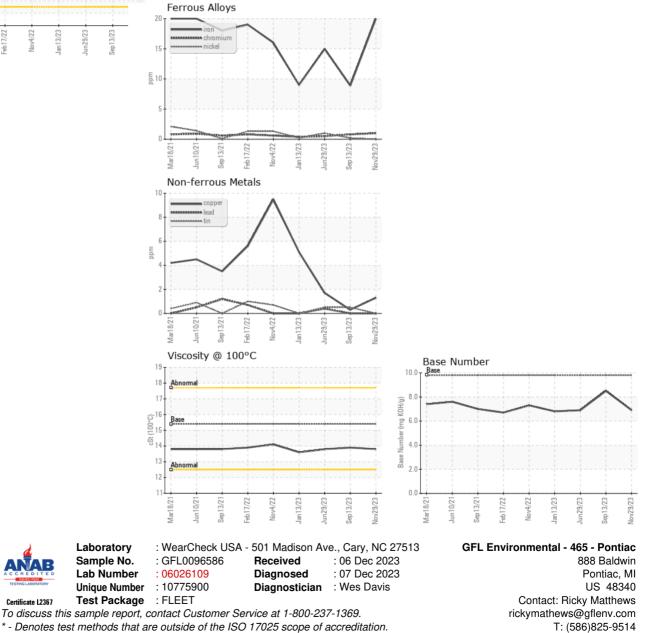

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: Ricky Matthews

Page 2 of 2

F: