




PROBLEM SUMMARY

Sample Rating Trend





GLYCOL



Machine Id
10857
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (13 GAL)

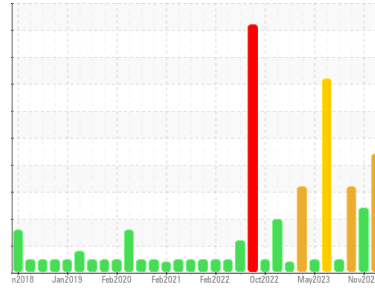

COMPONENT CONDITION SUMMARY

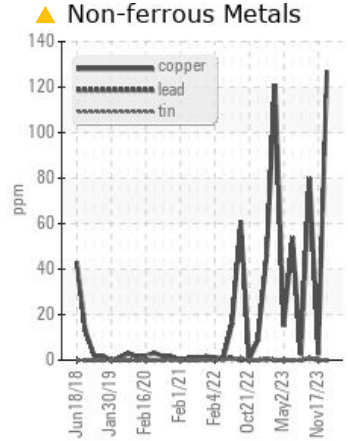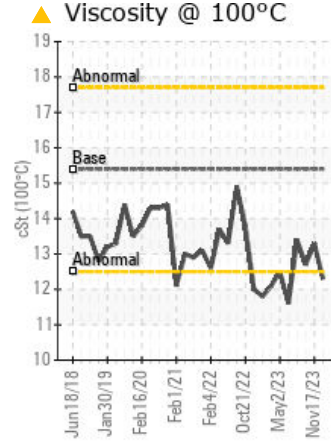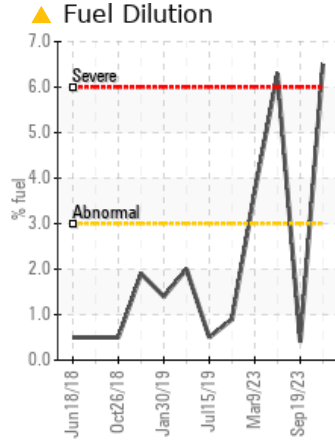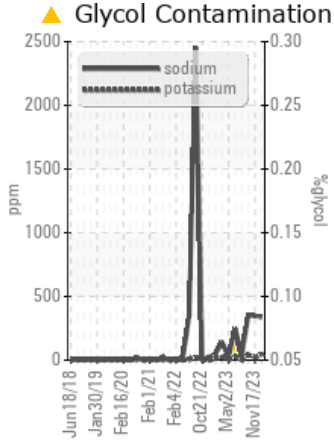

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. We advise that you check the fuel injection system. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
Copper	ppm	ASTM D5185m	>100	▲ 127	2	▲ 80
Sodium	ppm	ASTM D5185m		▲ 338	▲ 347	▲ 356
Potassium	ppm	ASTM D5185m	>20	▲ 42	▲ 22	▲ 43
Fuel	%	ASTM D3524	>3.0	▲ 6.5	<1.0	<1.0
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 12.3	13.3	12.7

Customer Id: GFL010
Sample No.: GFL0101217
Lab Number: 06026173
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

17 Nov 2023 Diag: Jonathan Hester

GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report



12 Oct 2023 Diag: Jonathan Hester

GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition. The copper level is abnormal. All other component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report



19 Sep 2023 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. Fuel content negligible. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

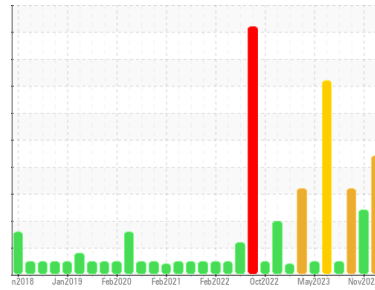

GLYCOL



Machine Id
10857
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (13 GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We advise that you check the fuel injection system. We recommend an early resample to monitor this condition.

Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core).

Contamination

Sodium and/or potassium levels are high. There is a moderate amount of fuel present in the oil.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0101217	GFL0101185	GFL0097864
Sample Date	Client Info	05 Dec 2023	17 Nov 2023	12 Oct 2023
Machine Age	hrs	1238	1141	967
Oil Age	hrs	408	311	137
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >75	37	18	8
Chromium	ppm	ASTM D5185m >5	1	<1	<1
Nickel	ppm	ASTM D5185m >4	0	0	<1
Titanium	ppm	ASTM D5185m >2	0	<1	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >15	4	4	2
Lead	ppm	ASTM D5185m >25	0	0	<1
Copper	ppm	ASTM D5185m >100	▲ 127	2	▲ 80
Tin	ppm	ASTM D5185m >4	0	<1	<1
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	8	19	15
Barium	ppm	ASTM D5185m 0	2	0	0
Molybdenum	ppm	ASTM D5185m 60	67	70	64
Manganese	ppm	ASTM D5185m 0	0	<1	1
Magnesium	ppm	ASTM D5185m 1010	715	896	768
Calcium	ppm	ASTM D5185m 1070	942	1090	899
Phosphorus	ppm	ASTM D5185m 1150	731	1014	796
Zinc	ppm	ASTM D5185m 1270	993	1216	1040
Sulfur	ppm	ASTM D5185m 2060	2613	3025	2518

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	13	12	9
Sodium	ppm	ASTM D5185m	▲ 338	▲ 347	▲ 356
Potassium	ppm	ASTM D5185m >20	▲ 42	▲ 22	▲ 43
Fuel	%	ASTM D3524 >3.0	▲ 6.5	<1.0	<1.0
Glycol	%	*ASTM D2982	NEG	NEG	NEG

INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >6	1.3	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	10.0	6.8	6.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.8	17.6	16.6


FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.9	13.9	11.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.6	8.8	9.0




OIL ANALYSIS REPORT


Fuel Dilution

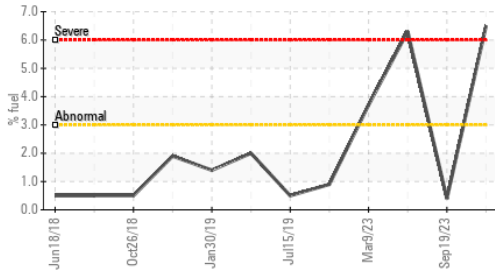


Glycol Contamination

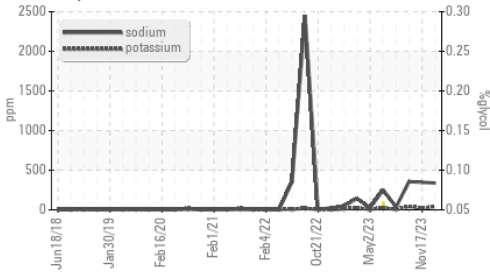


Non-ferrous Metals

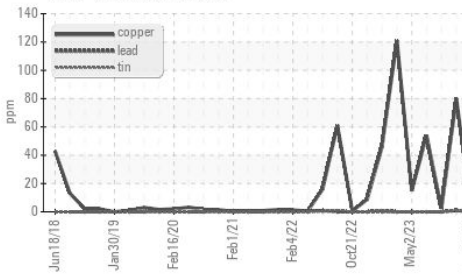

Base Number

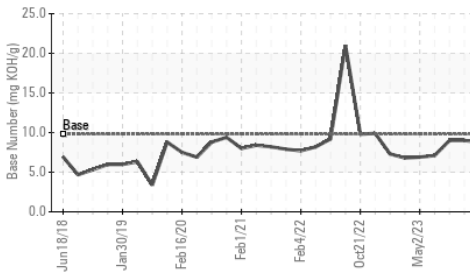

Glycol Contamination

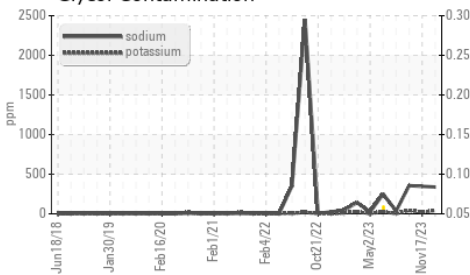


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 12.3	13.3	12.7

GRAPHS


Ferrous Alloys

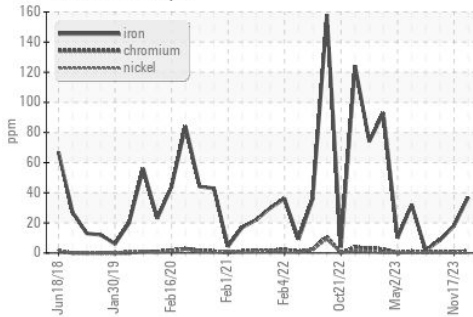


Non-ferrous Metals

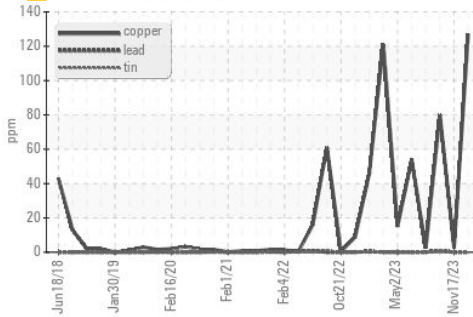

Viscosity @ 100°C

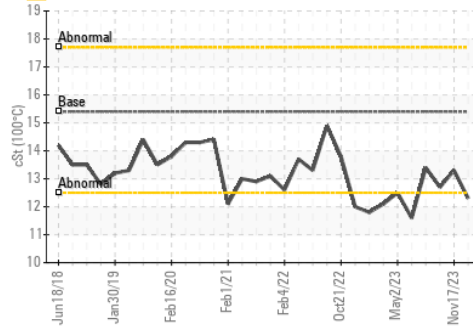

Base Number

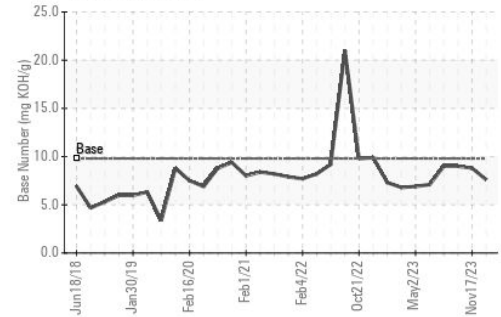

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0101217
Lab Number : 06026173
Unique Number : 10775964
Test Package : FLEET (Additional Tests: FuelDilution, Glycol, PercentFuel)

GFL Environmental - 010 - Stockbridge
 1280 Rum Creek Parkway
 Stockbridge, GA
 US 30281
 Contact: TECHNICIAN ACCOUNT
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: