




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**713005**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 30 (--- GAL)**

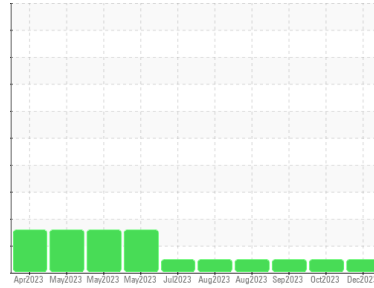

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0089658</b>	GFL0089634	GFL0089593
Sample Date	Client Info	<b>01 Dec 2023</b>	10 Oct 2023	14 Sep 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	<b>Not Changed</b>	Not Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>12</b>	7	4
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Titanium	ppm ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Aluminum	ppm ASTM D5185m >20	<b>2</b>	2	0
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm ASTM D5185m >330	<b>3</b>	2	2
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	<b>6</b>	7	13
Barium	ppm ASTM D5185m 10	<b>2</b>	0	0
Molybdenum	ppm ASTM D5185m 100	<b>64</b>	63	66
Manganese	ppm ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185m 450	<b>799</b>	853	935
Calcium	ppm ASTM D5185m 3000	<b>1013</b>	976	1103
Phosphorus	ppm ASTM D5185m 1150	<b>849</b>	911	1013
Zinc	ppm ASTM D5185m 1350	<b>1056</b>	1122	1242
Sulfur	ppm ASTM D5185m 4250	<b>2952</b>	2705	3714

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>9</b>	8	10
Sodium	ppm ASTM D5185m >75	<b>2</b>	2	2
Potassium	ppm ASTM D5185m >20	<b>10</b>	6	4

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.2</b>	0.1	0.1
Nitration	Abs/cm *ASTM D7624 >20	<b>7.4</b>	5.8	5.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.5</b>	17.3	17.3

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.6</b>	13.1	13.2
Base Number (BN)	mg KOH/g ASTM D2896 8.5	<b>6.7</b>	7.4	8.1







# OIL ANALYSIS REPORT

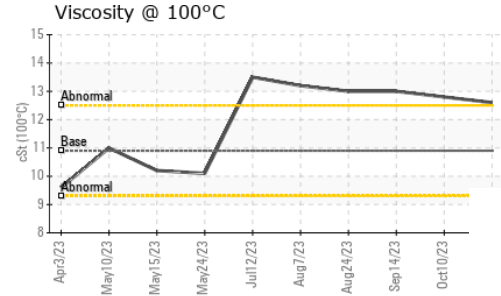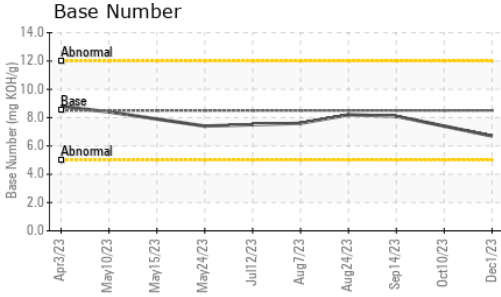

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.9	12.6	12.8

## GRAPHS

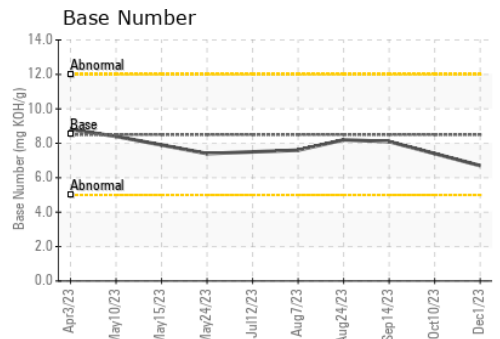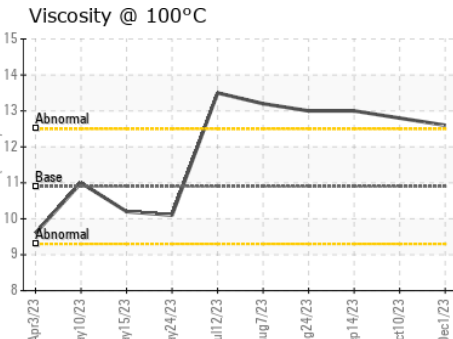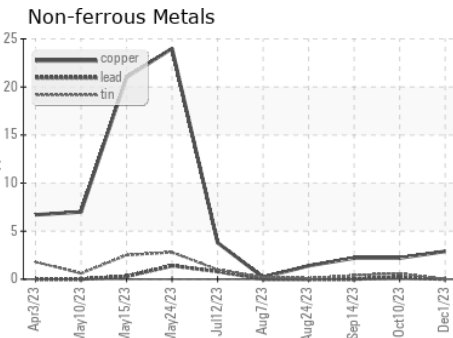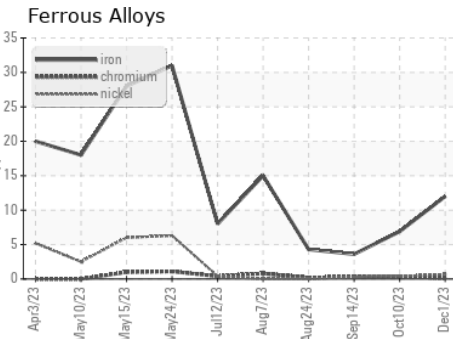

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0089658  
 Lab Number : 06026264  
 Unique Number : 10776055  
 Test Package : FLEET

Received : 06 Dec 2023  
 Diagnosed : 07 Dec 2023  
 Diagnostician : Wes Davis

GFL Environmental - 732 - Thomaston Hauling  
 2616 Waynmanville Road  
 Thomaston, GA  
 US 30286  
 Contact: WILLIAM BROWN  
 william.brown@gflenv.com  
 T: (706)936-4065  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)