


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

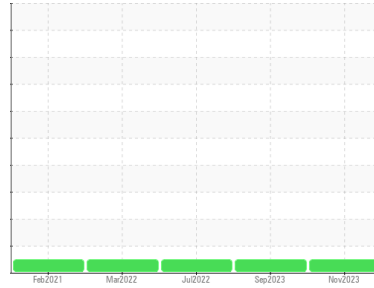

Machine Id  
**FORD 514**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON XL SYN BLEND 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0096394</b>	PCA0105057	PCA0054211
Sample Date	Client Info		<b>27 Nov 2023</b>	28 Sep 2023	28 Jul 2022
Machine Age	mls	Client Info	<b>96424</b>	89117	45045
Oil Age	mls	Client Info	<b>7500</b>	7500	7500
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>14</b>	12	44
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m >4	<b>1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	2	7
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	0	2
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 1	<b>4</b>	2	6
Barium	ppm	ASTM D5185m 1	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>45</b>	57	54
Manganese	ppm	ASTM D5185m 1	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>900</b>	893	816
Calcium	ppm	ASTM D5185m 1070	<b>686</b>	1096	1083
Phosphorus	ppm	ASTM D5185m 1150	<b>780</b>	963	844
Zinc	ppm	ASTM D5185m 1270	<b>946</b>	1178	1096
Sulfur	ppm	ASTM D5185m 2060	<b>2227</b>	2972	2535

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>15</b>	21	16
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	3	5
Potassium	ppm	ASTM D5185m >20	<b>23</b>	1	0



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.1	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.6</b>	6.3	10.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.4</b>	20.4	25.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>22.1</b>	19.4	27.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.6	<b>6.2</b>	7.1	7.93









# OIL ANALYSIS REPORT

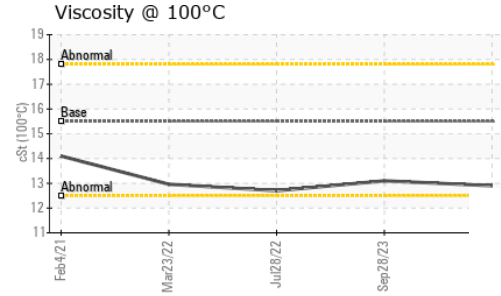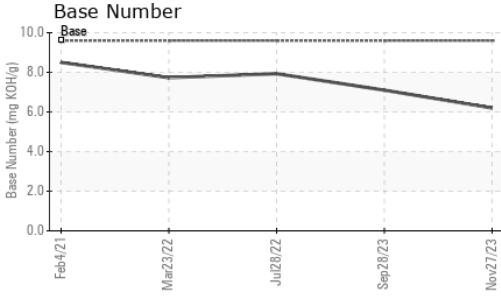

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.5	<b>12.9</b>	13.1	12.7

## GRAPHS

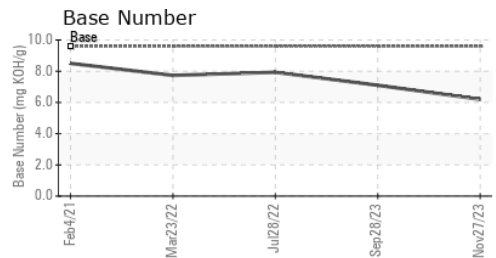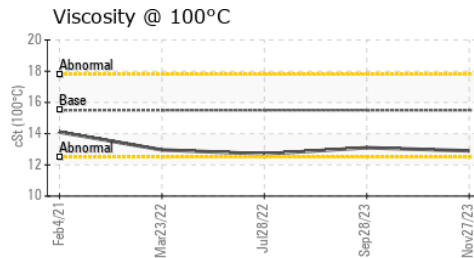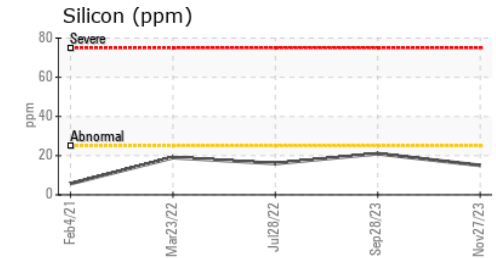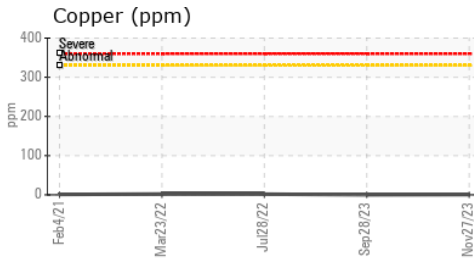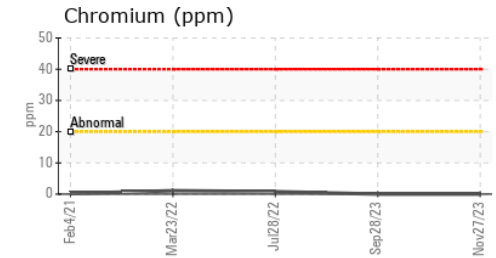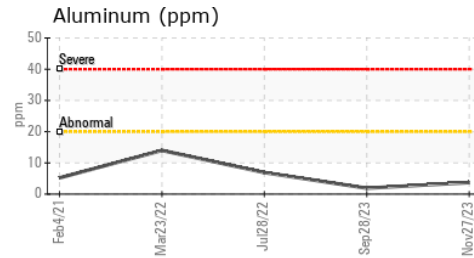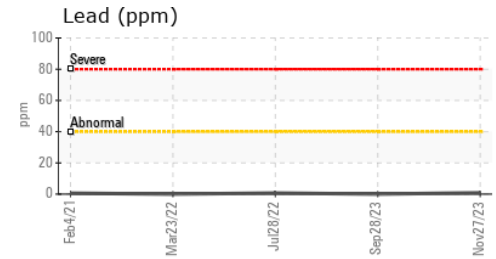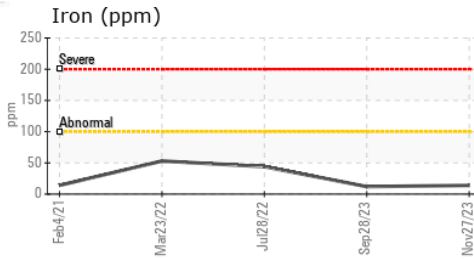

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0096394 **Received** : 06 Dec 2023  
**Lab Number** : **06027070** **Diagnosed** : 08 Dec 2023  
**Unique Number** : 10776861 **Diagnostician** : Wes Davis

**B & B HARVESTING**  
 2842 LADD RD  
 MODESTO, CA  
 US 95356  
 Contact: Service Manager  
 drcalvalley@gmail.com  
 T: (209)545-8300  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)