




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

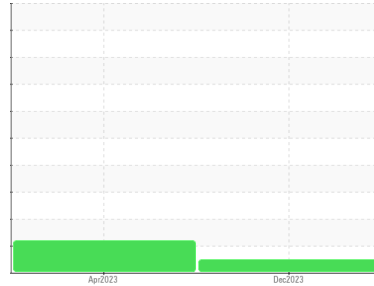

Machine Id  
**FREIGHTLINER 822045 - URN28**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0091665</b>	GFL0036645	---
Sample Date	Client Info	<b>01 Dec 2023</b>	28 Apr 2023	---
Machine Age	hrs	Client Info	<b>61058</b>	4352
Oil Age	hrs	Client Info	<b>250</b>	600
Oil Changed	Client Info	<b>Changed</b>	Changed	---
Sample Status		<b>NORMAL</b>	ATTENTION	---

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	▲ 3.6	---
Water	WC Method >0.2	<b>NEG</b>	NEG	---
Glycol	WC Method	<b>NEG</b>	NEG	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>29</b>	64	---
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	---
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	---
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	---
Silver	ppm ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm ASTM D5185m >30	<b>3</b>	4	---
Lead	ppm ASTM D5185m >30	<b>0</b>	0	---
Copper	ppm ASTM D5185m >150	<b>1</b>	5	---
Tin	ppm ASTM D5185m >5	<b>0</b>	0	---
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>4</b>	24	---
Barium	ppm ASTM D5185m 0	<b>0</b>	2201	---
Molybdenum	ppm ASTM D5185m 60	<b>62</b>	34	---
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	2	---
Magnesium	ppm ASTM D5185m 1010	<b>973</b>	491	---
Calcium	ppm ASTM D5185m 1070	<b>1212</b>	1138	---
Phosphorus	ppm ASTM D5185m 1150	<b>1083</b>	866	---
Zinc	ppm ASTM D5185m 1270	<b>1335</b>	810	---
Sulfur	ppm ASTM D5185m 2060	<b>3026</b>	2627	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>5</b>	18	---
Sodium	ppm ASTM D5185m	<b>7</b>	23	---
Potassium	ppm ASTM D5185m >20	<b>4</b>	19	---

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.9</b>	0.6	---
Nitration	Abs/cm *ASTM D7624 >20	<b>10.7</b>	11.1	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>22.9</b>	33.0	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>19.6</b>	38.9	---
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>6.7</b>	12.4	---







# OIL ANALYSIS REPORT

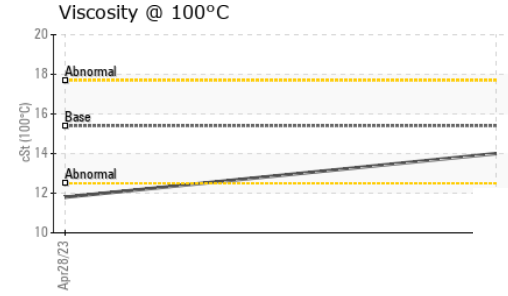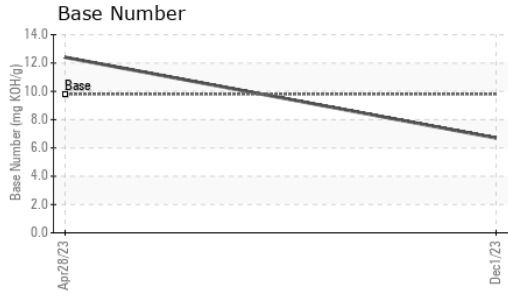

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.0</b>	▲ 11.8	---

## GRAPHS

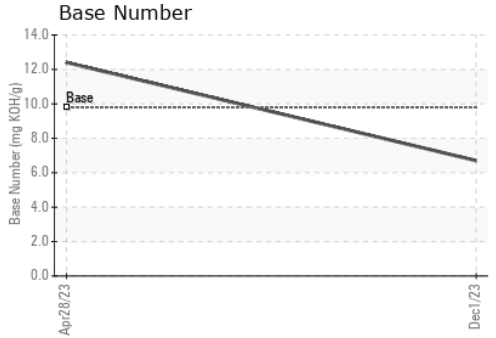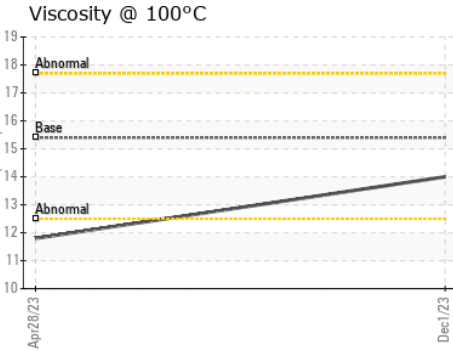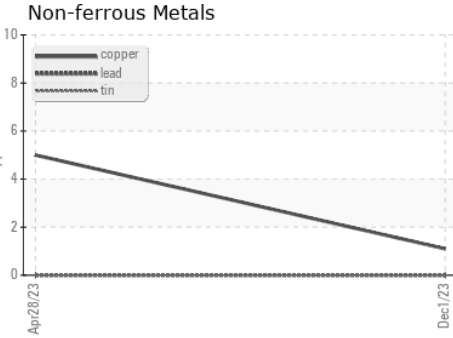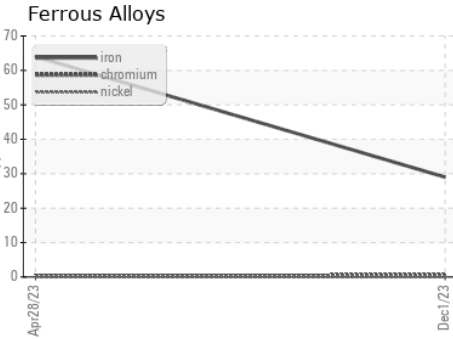

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0091665 **Received** : 06 Dec 2023  
**Lab Number** : **06027126** **Diagnosed** : 11 Dec 2023  
**Unique Number** : 10776917 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET

**GFL Environmental - 036 - North Wilksboro**  
 489 Boone Trail  
 Wilkesboro, NC  
 US 28659  
 Contact: JAMES KRESGE  
 jkresge@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)