


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

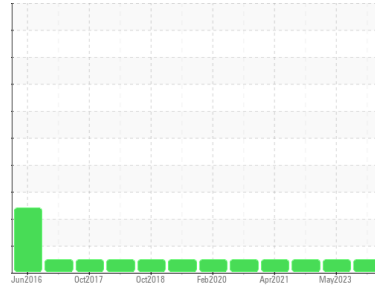

Area  
**US ELECTRICAL SVC-CRANBURY**  
 Machine Id  
**HINO 361431**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (16 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>PCA0099700</b>	PCA0091440	PCA0068678	
Sample Date	Client Info	<b>02 Nov 2023</b>	11 May 2023	20 May 2022	
Machine Age	mls	Client Info	<b>312690</b>	300818	276064
Oil Age	mls	Client Info	<b>20000</b>	20000	4436
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>7</b>	21	45
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>3</b>	0	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>7</b>	3	12
Lead	ppm ASTM D5185m >40	<b>3</b>	<1	4
Copper	ppm ASTM D5185m >330	<b>12</b>	1	6
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Antimony	ppm ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>124</b>	20	42
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 50	<b>17</b>	74	72
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 950	<b>266</b>	822	865
Calcium	ppm ASTM D5185m 1050	<b>1942</b>	1104	1170
Phosphorus	ppm ASTM D5185m 995	<b>1057</b>	924	1058
Zinc	ppm ASTM D5185m 1180	<b>1235</b>	1114	1233
Sulfur	ppm ASTM D5185m 2600	<b>4329</b>	3183	3661

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	7	5
Sodium	ppm ASTM D5185m	<b>0</b>	4	4
Potassium	ppm ASTM D5185m >20	<b>7</b>	<1	4



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>1.7</b>	0.8	1.3
Nitration	Abs/cm *ASTM D7624 >20	<b>14.2</b>	9.7	12.4
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>23.4</b>	18.6	22.7

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>21.8</b>	15.3	19.6
Base Number (BN)	mg KOH/g ASTM D2896	<b>8.8</b>	9.1	11.9









# OIL ANALYSIS REPORT

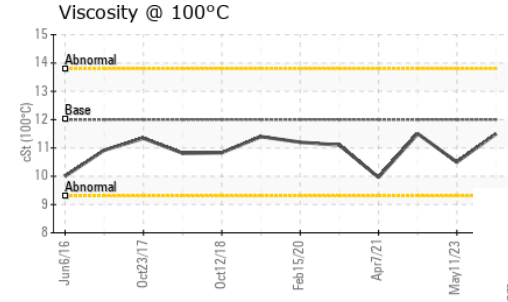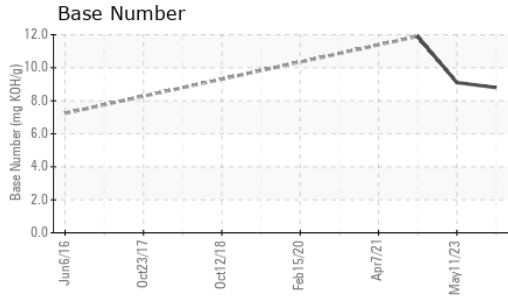

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.5</b>	10.5	11.5

## GRAPHS

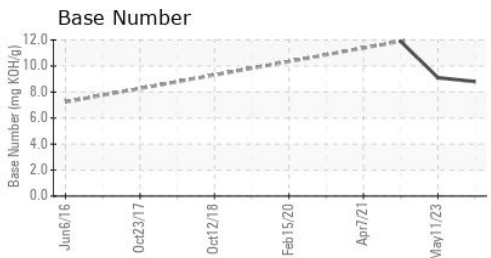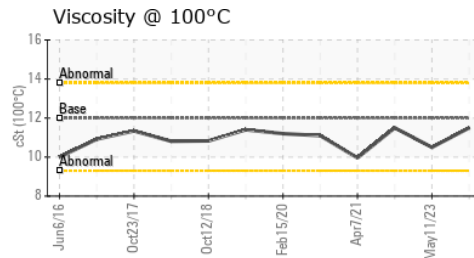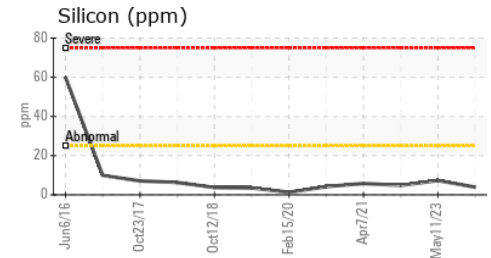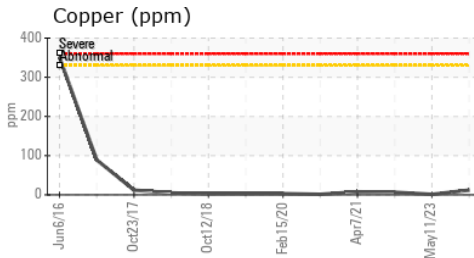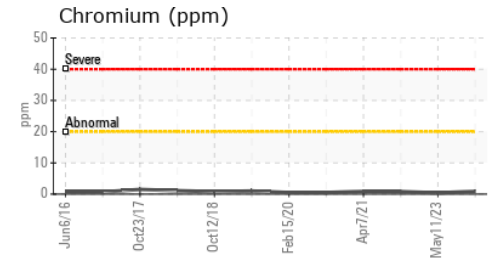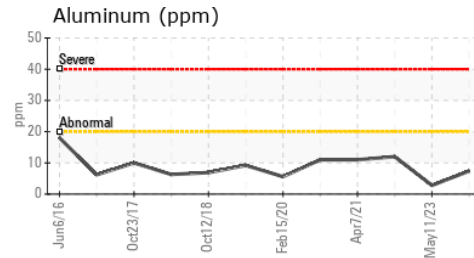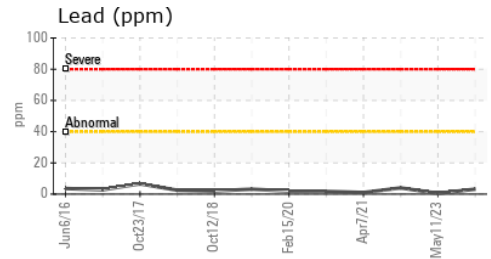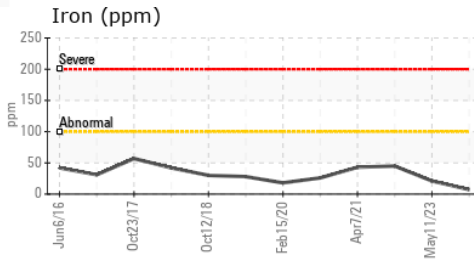

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0099700 **Received** : 07 Dec 2023  
**Lab Number** : 06027331 **Diagnosed** : 11 Dec 2023  
**Unique Number** : 10777122 **Diagnostician** : Jonathan Hester  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #121**  
 107 HOW LANE  
 NEW BRUNSWICK, NJ  
 US 08901  
 Contact: Anthony Cursi  
 acursi@millertransgroup.com  
 T: (732)358-4027  
 F: (732)400-8475

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)