


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

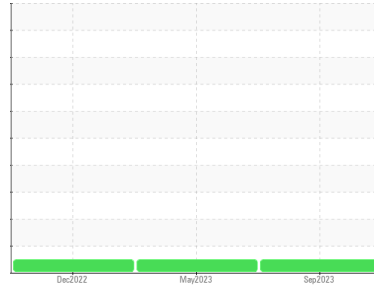

Machine Id  
**685331**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0099664</b>	PCA0091409	PCA0077066
Sample Date	Client Info		<b>29 Sep 2023</b>	23 May 2023	02 Dec 2022
Machine Age	mls	Client Info	<b>0</b>	182586	0
Oil Age	mls	Client Info	<b>10000</b>	24000	10000
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>5</b>	39	30
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	2
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	9	9
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	1
Copper	ppm	ASTM D5185m >330	<b>1</b>	27	9
Tin	ppm	ASTM D5185m >15	<b>0</b>	1	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>0</b>	18	4
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>62</b>	66	64
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>998</b>	841	982
Calcium	ppm	ASTM D5185m 1050	<b>1069</b>	1163	1133
Phosphorus	ppm	ASTM D5185m 995	<b>1065</b>	925	1024
Zinc	ppm	ASTM D5185m 1180	<b>1284</b>	1148	1289
Sulfur	ppm	ASTM D5185m 2600	<b>3368</b>	2888	3059

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	7	6
Sodium	ppm	ASTM D5185m	<b>0</b>	4	3
Potassium	ppm	ASTM D5185m >20	<b>3</b>	8	7



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1</b>	0.6	0.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>14.0</b>	9.0	10.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>27.5</b>	20.2	22.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>30.7</b>	16.0	17.8
Base Number (BN)	mg KOH/g	ASTM D2896	<b>5.9</b>	7.5	8.1









# OIL ANALYSIS REPORT

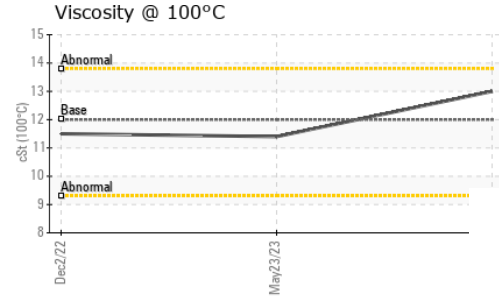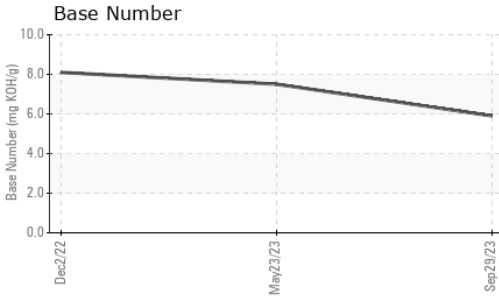

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	13.0	11.4

### GRAPHS

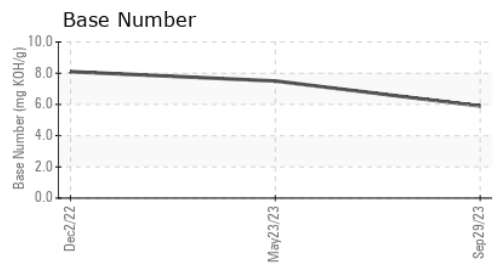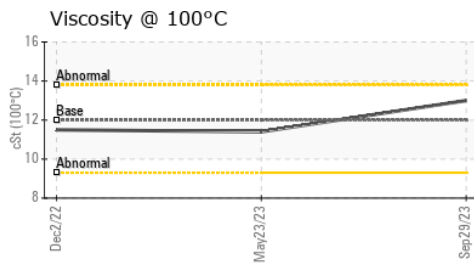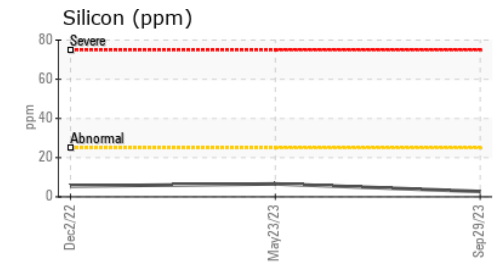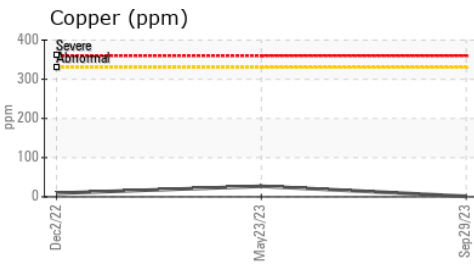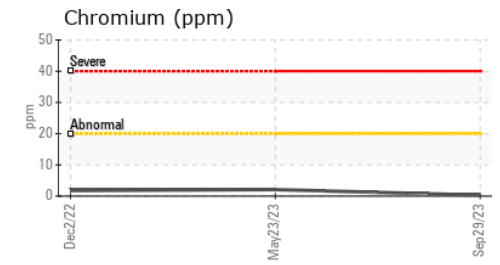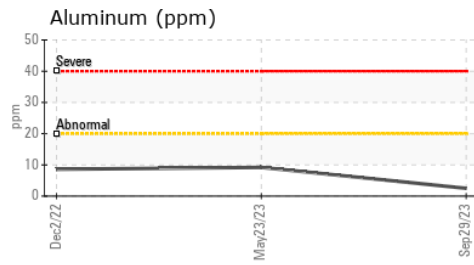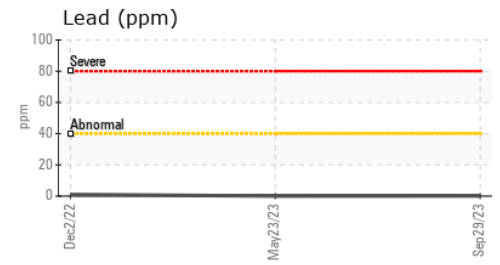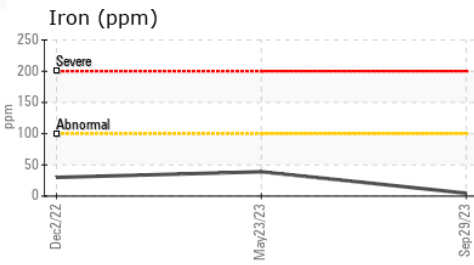

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0099664 **Received** : 07 Dec 2023  
**Lab Number** : 06027361 **Diagnosed** : 08 Dec 2023  
**Unique Number** : 10777152 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #121**  
 107 HOW LANE  
 NEW BRUNSWICK, NJ  
 US 08901  
 Contact: Anthony Cursi  
 acursi@millertransgroup.com  
 T: (732)358-4027  
 F: (732)400-8475

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)