




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

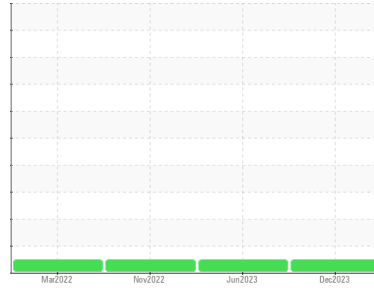

Machine Id  
**125013-1122**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0061042</b>	GFL0030395	GFL0061057
Sample Date	Client Info	<b>02 Dec 2023</b>	19 Jun 2023	28 Nov 2022
Machine Age	hrs	<b>6779</b>	6175	5590
Oil Age	hrs	<b>610</b>	580	609
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>18</b>	13	21
Chromium	ppm ASTM D5185m >4	<b>1</b>	<1	2
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >25	<b>5</b>	1	5
Lead	ppm ASTM D5185m >45	<b>&lt;1</b>	0	1
Copper	ppm ASTM D5185m >85	<b>1</b>	<1	2
Tin	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>7</b>	13	15
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>64</b>	59	61
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>1026</b>	889	889
Calcium	ppm ASTM D5185m 1070	<b>1184</b>	1182	1145
Phosphorus	ppm ASTM D5185m 1150	<b>1080</b>	986	924
Zinc	ppm ASTM D5185m 1270	<b>1324</b>	1214	1155
Sulfur	ppm ASTM D5185m 2060	<b>3026</b>	3299	3112

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>6</b>	4	7
Sodium	ppm ASTM D5185m	<b>1</b>	2	2
Potassium	ppm ASTM D5185m >20	<b>15</b>	5	11

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.4</b>	0.3	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>9.5</b>	8.7	10.3
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.1</b>	19.9	21.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.0</b>	15.9	18.3
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.6</b>	8.1	8.5







# OIL ANALYSIS REPORT

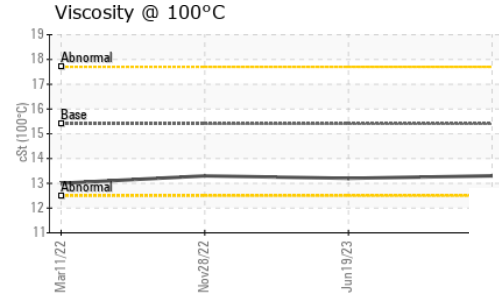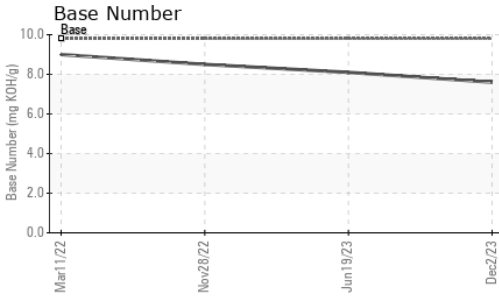

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.3</b>	13.2	13.3

## GRAPHS

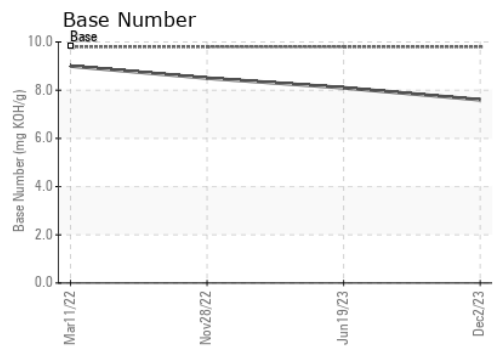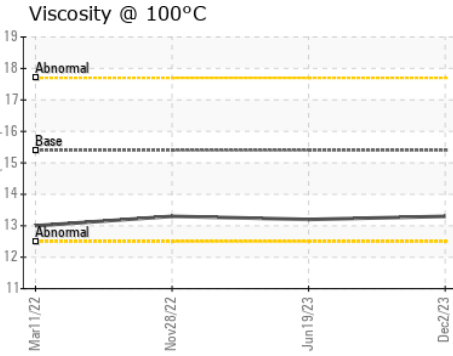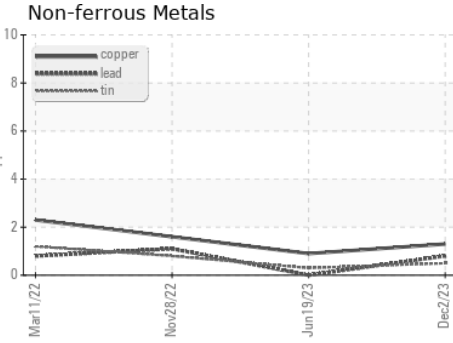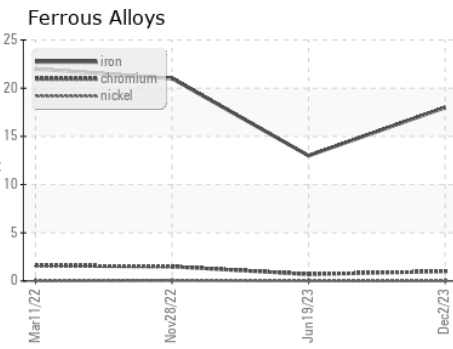

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0061042 **Received** : 07 Dec 2023  
**Lab Number** : **06027563** **Diagnosed** : 08 Dec 2023  
**Unique Number** : 10777354 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 633 - Grand Haven**  
 1680 Peach St  
 Whitehall, MI  
 US 49461  
 Contact: Derek Kater  
 dkater@gflenv.com

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)