

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

SENNEBOGEN 840E MH-82

Component

Hydraulic System

AW HYDRAULIC OIL ISO 10 (--- LTR)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		,		Nov2023		
SAMPLE INFO	RMATION	M method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0112791		
Sample Date		Client Info		16 Nov 2023		
Machine Age	hrs	Client Info		230		
Oil Age	hrs	Client Info		230		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
CONTAMINA	TION	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR META	LS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>10	<1		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>75	0		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	0		
Molybdenum	ppm	ASTM D5185m	5	<1		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	25	2		
Calcium	ppm	ASTM D5185m	200	55		
Phosphorus	ppm	ASTM D5185m	300	341		
Zinc	ppm	ASTM D5185m	370	446		
Sulfur	ppm	ASTM D5185m	2500	930		
CONTAMINA	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<1		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	<1		
FLUID CLEAN	NLINES	S method	limit/base	current	history1	history2
Particles \1um		ΔSTM D7647	>5000	199973		

Silicon	ppm	ASTM D5185m	>20	<1		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	<1		
FLUID CLEANL	.INESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	199973		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14μm		ASTM D7647	>160	<u>▲</u> 531		
Particles >21µm		ASTM D7647	>40	14		
Particles >38μm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<u>25/24/16</u>		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2


Acid Number (AN)

mg KOH/g ASTM D8045 0.57

0.36 ---- ---- Contact/Location: DOMINIC WHITE - SCRBURIN



OIL ANALYSIS REPORT

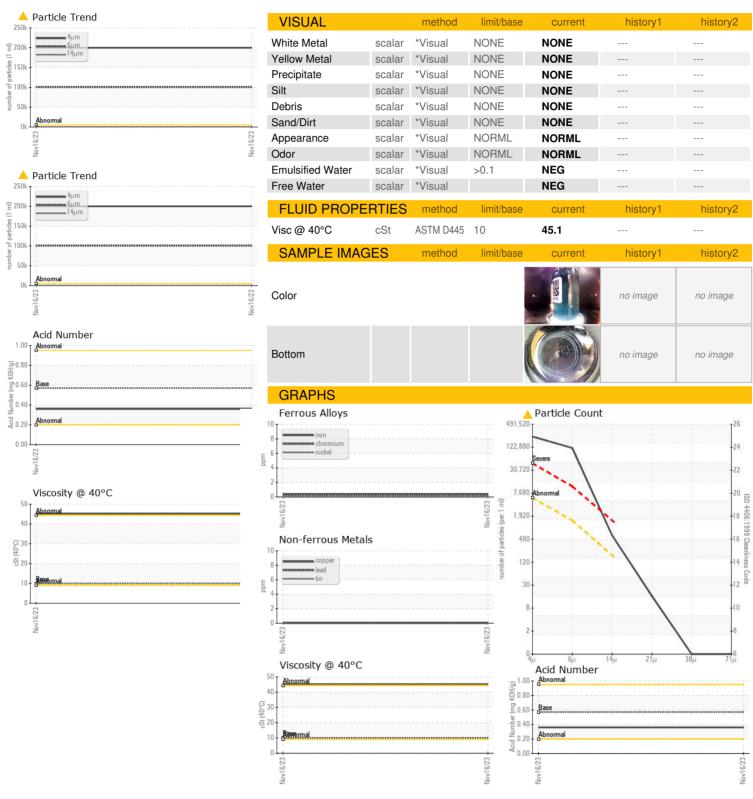



Certificate L2367

Laboratory Sample No.

Lab Number **Unique Number**

: 06027681 : 10777472 Test Package : MOB 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 07 Dec 2023 : PCA0112791 Diagnosed : 08 Dec 2023

: Don Baldridge Diagnostician

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

SCRAP METAL SERVICES (SMS Mill Services LLC)

250 WEST U.S. HWY 12 CHESTERTON, IN

US 46304 Contact: DOMINIC WHITE

dwhite@scrapmetalservices.com T:

F: