


OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY



Area
G.LOPES CONSTRUCTION INC./Off-Road
Machine Id
E568
Component
Right Final Drive
Fluid
PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)

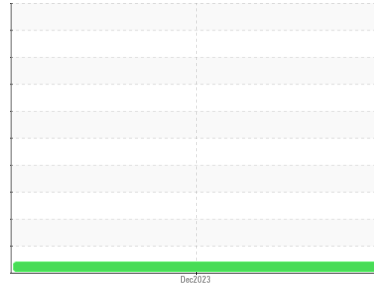

DIAGNOSIS

- ▲ Recommendation**
Resample at the next service interval to monitor.
- Wear**
All component wear rates are normal.
- Contamination**
There is no indication of any contamination in the oil.
- ▲ Fluid Condition**
The oil viscosity is lower than normal. Confirm oil type. The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0109557	---	---
Sample Date	Client Info		05 Dec 2023	---	---
Machine Age	hrs	Client Info	11854	---	---
Oil Age	hrs	Client Info	11854	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ATTENTION	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >800	569	---	---
Chromium	ppm	ASTM D5185m >10	2	---	---
Nickel	ppm	ASTM D5185m >5	<1	---	---
Titanium	ppm	ASTM D5185m >15	2	---	---
Silver	ppm	ASTM D5185m >2	0	---	---
Aluminum	ppm	ASTM D5185m >75	37	---	---
Lead	ppm	ASTM D5185m >10	0	---	---
Copper	ppm	ASTM D5185m >75	7	---	---
Tin	ppm	ASTM D5185m >8	0	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	23	---	---
Barium	ppm	ASTM D5185m 0	0	---	---
Molybdenum	ppm	ASTM D5185m 0	15	---	---
Manganese	ppm	ASTM D5185m 0	5	---	---
Magnesium	ppm	ASTM D5185m 9	88	---	---
Calcium	ppm	ASTM D5185m 3114	2605	---	---
Phosphorus	ppm	ASTM D5185m 1099	1083	---	---
Zinc	ppm	ASTM D5185m 1245	1192	---	---
Sulfur	ppm	ASTM D5185m 7086	6637	---	---


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >400	171	---	---
Sodium	ppm	ASTM D5185m	11	---	---
Potassium	ppm	ASTM D5185m >20	14	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 3.27	1.11	---	---

OIL ANALYSIS REPORT

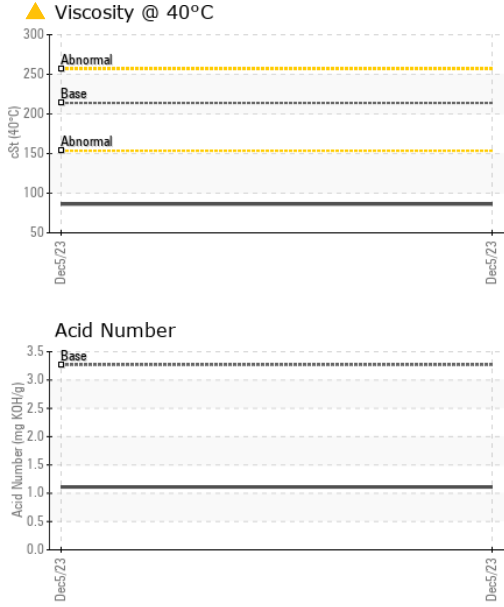


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	MODER	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	213.9 ▲ 86.3	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

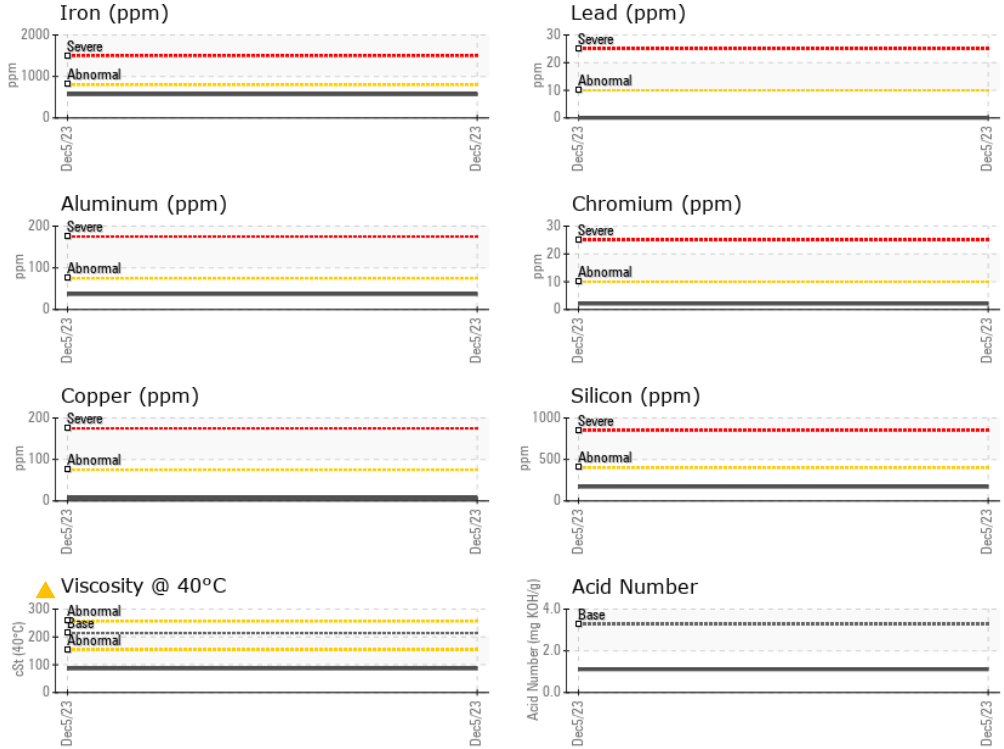

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0109557 **Received** : 07 Dec 2023
Lab Number : 06027939 **Diagnosed** : 10 Dec 2023
Unique Number : 10777730 **Diagnostician** : Don Baldrige
Test Package : MOB 2

G LOPES CONSTRUCTION
 565 WINTHROP ST
 TAUNTON, MA
 US 02780
 Contact: BUTCH MCGRATH
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: