

Machine Id
SENNEBOGEN 840E MH-82
 Component
Diesel Engine
 Fluid
DISEL ENGINE OIL 10W40 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0112792	PCA0083707	PCA0083711
Sample Date	Client Info			16 Nov 2023	02 May 2023	25 Feb 2023
Machine Age	hrs	Client Info		230	12988	12112
Oil Age	hrs	Client Info		230	500	500
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	17	30	39
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	1	1
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	8	<1	<1
Tin	ppm	ASTM D5185m	>15	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	49	4	5
Barium	ppm	ASTM D5185m	10	<1	0	<1
Molybdenum	ppm	ASTM D5185m	100	40	59	64
Manganese	ppm	ASTM D5185m		8	<1	<1
Magnesium	ppm	ASTM D5185m	450	558	999	1029
Calcium	ppm	ASTM D5185m	3000	1516	1103	1125
Phosphorus	ppm	ASTM D5185m	1150	903	1048	1026
Zinc	ppm	ASTM D5185m	1350	1095	1342	1353
Sulfur	ppm	ASTM D5185m	4250	2806	3644	3319

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	15	3	3
Sodium	ppm	ASTM D5185m		4	3	3
Potassium	ppm	ASTM D5185m	>20	1	2	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.1	0.6	0.7
Nitration	Abs/cm	*ASTM D7624	>20	7.4	9.4	10.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.6	19.7	23.0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.6	18.8	22.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.71	8.65	8.68









OIL ANALYSIS REPORT

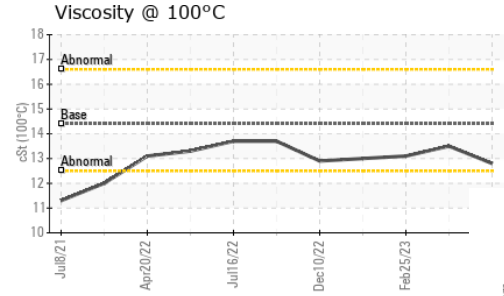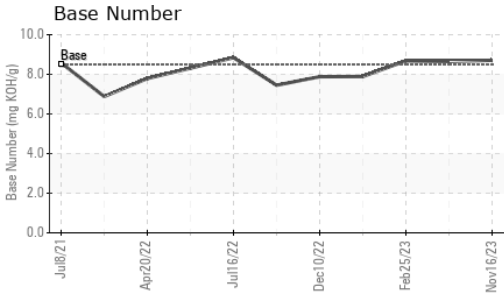

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	12.8	13.5	13.1

GRAPHS

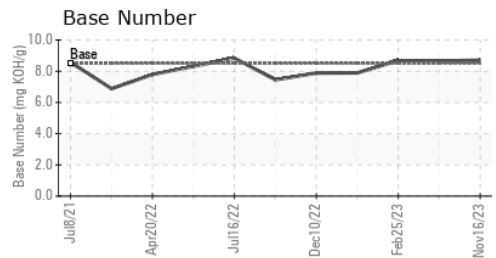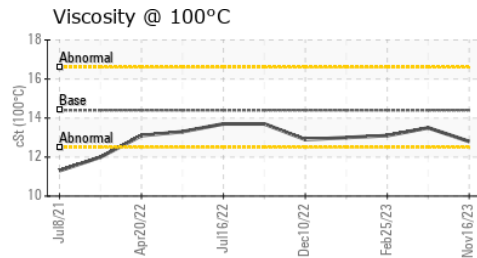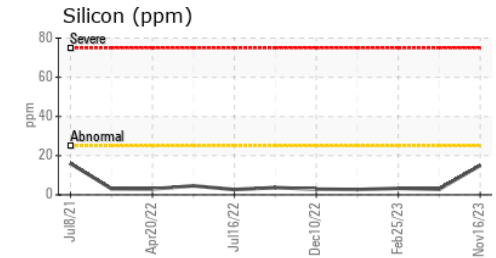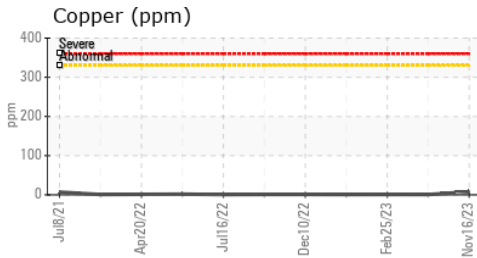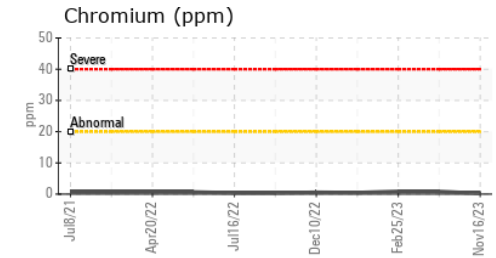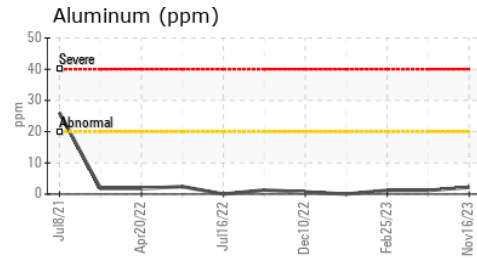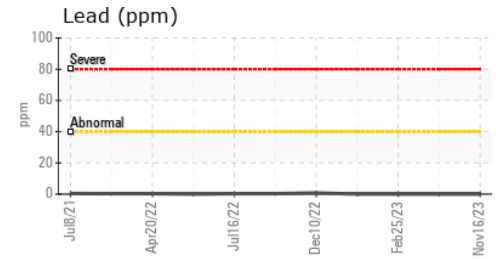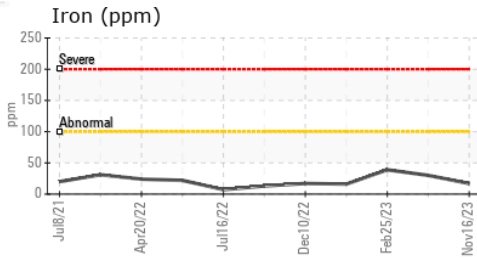

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0112792 **Received** : 07 Dec 2023
Lab Number : **06027969** **Diagnosed** : 14 Dec 2023
Unique Number : 10777760 **Diagnostician** : Jonathan Hester
Test Package : MOB 2

SCRAP METAL SERVICES (SMS Mill Services LLC)
 250 WEST U.S. HWY 12
 CHESTERTON, IN
 US 46304
 Contact: WALTER MURRAY
 wmurray@scrapmetalservices.com
 T: (219)787-1341
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)