


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

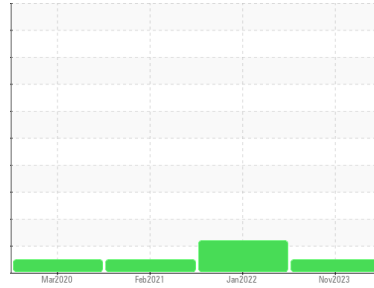

Machine Id
T282
 Component
Transmission (Auto)
 Fluid
COGNIS EMGARD 2805 ATF (10 mls)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0110869	PCA0063093	PCA0042952
Sample Date	Client Info			30 Nov 2023	10 Jan 2022	17 Feb 2021
Machine Age	mls	Client Info		135062	57781	55586
Oil Age	mls	Client Info		0	75000	0
Oil Changed	Client Info			Changed	Changed	Not Changed
Sample Status				NORMAL	ABNORMAL	NORMAL


CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>160	70	43	44
Chromium	ppm	ASTM D5185m	>5	0	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	<1	1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>5	0	<1	0
Aluminum	ppm	ASTM D5185m	>50	30	28	17
Lead	ppm	ASTM D5185m	>50	8	46	28
Copper	ppm	ASTM D5185m	>225	89	15	11
Tin	ppm	ASTM D5185m	>10	3	3	3
Antimony	ppm	ASTM D5185m		---	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		70	104	132
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		<1	1	5
Calcium	ppm	ASTM D5185m		109	31	41
Phosphorus	ppm	ASTM D5185m		221	263	296
Zinc	ppm	ASTM D5185m		29	52	38
Sulfur	ppm	ASTM D5185m		1546	339	250
Lithium	ppm	ASTM D5185m		---	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	6	5	3
Sodium	ppm	ASTM D5185m		6	2	4
Potassium	ppm	ASTM D5185m	>20	1	<1	10

OIL ANALYSIS REPORT

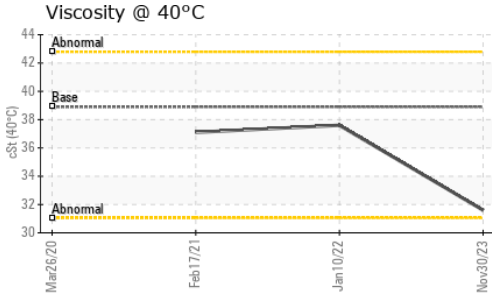




VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	▲ MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	38.9	31.6	37.6	37.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color	no image	no image	no image
Bottom	no image	no image	no image

GRAPHS

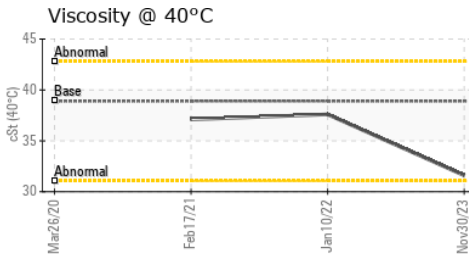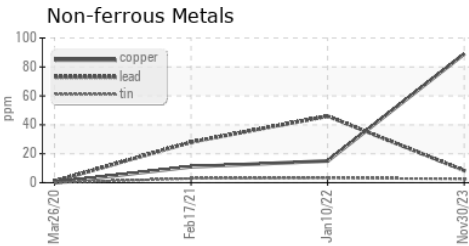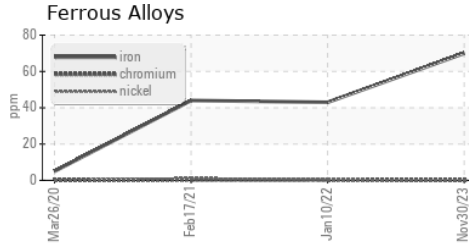

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0110869 **Received** : 07 Dec 2023
Lab Number : 06028234 **Diagnosed** : 10 Dec 2023
Unique Number : 10778025 **Diagnostician** : Don Baldrige
Test Package : FLEET

NW WHITE & CO - SPECIAL SERVICE DIVISION
 100 INDEPENDENCE BLVD
 COLUMBIA, SC
 US 29210
 Contact: George Edwards
 gedwards@nwwhite.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: