




# OIL ANALYSIS REPORT

Sample Rating Trend

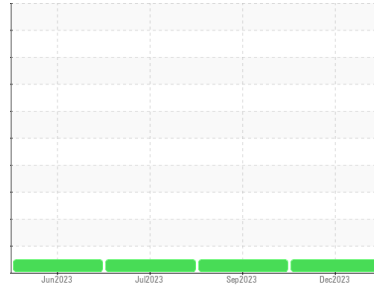

**NORMAL**



Machine Id  
**521034**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0086923</b>	GFL0086935	GFL0087002
Sample Date	Client Info	<b>04 Dec 2023</b>	06 Sep 2023	06 Jul 2023
Machine Age	hrs Client Info	<b>6900</b>	6501	6208
Oil Age	hrs Client Info	<b>692</b>	293	600
Oil Changed	Client Info	<b>N/A</b>	Not Changd	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>3</b>	13	6
Chromium	ppm ASTM D5185m >20	<b>0</b>	1	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	<1	0
Titanium	ppm ASTM D5185m	<b>0</b>	0	0
Silver	ppm ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >20	<b>&lt;1</b>	4	2
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	<1	<1
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>4</b>	8	6
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>55</b>	66	63
Manganese	ppm ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>959</b>	1033	916
Calcium	ppm ASTM D5185m 1070	<b>870</b>	1165	1114
Phosphorus	ppm ASTM D5185m 1150	<b>855</b>	1112	1020
Zinc	ppm ASTM D5185m 1270	<b>1086</b>	1352	1181
Sulfur	ppm ASTM D5185m 2060	<b>2854</b>	3932	2941

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>3</b>	5	3
Sodium	ppm ASTM D5185m	<b>&lt;1</b>	4	0
Potassium	ppm ASTM D5185m >20	<b>0</b>	15	4

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.2</b>	0.5	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>5.3</b>	7.4	6.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>17.6</b>	18.1	18.7

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.1</b>	13.1	13.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.9</b>	8.2	8.9







# OIL ANALYSIS REPORT

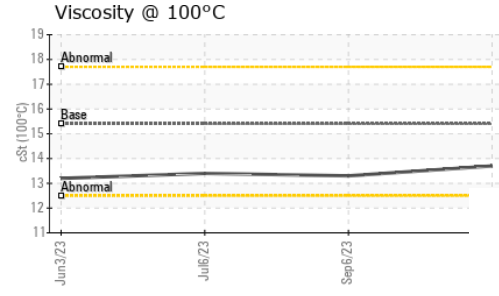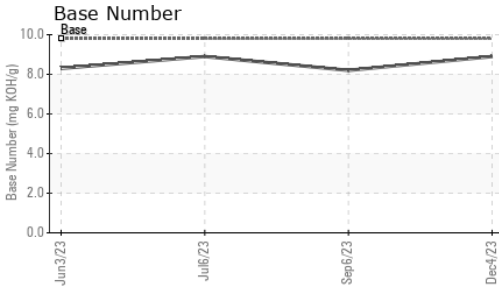

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	13.3	13.4

## GRAPHS

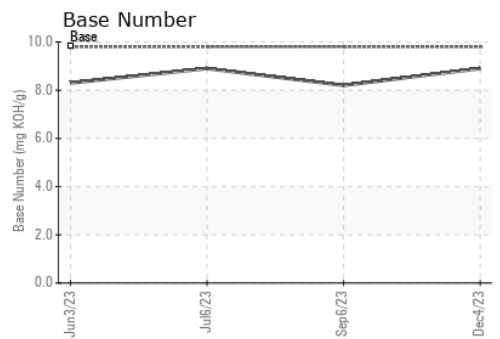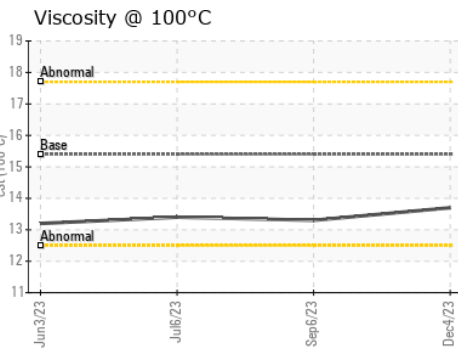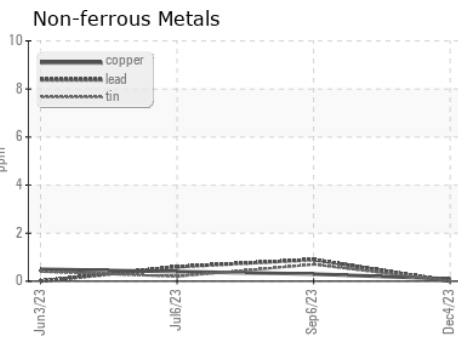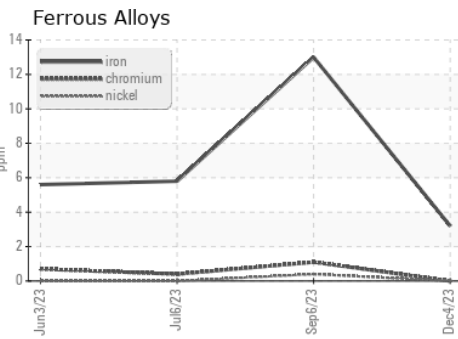

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0086923 **Received** : 07 Dec 2023  
**Lab Number** : **06028526** **Diagnosed** : 09 Dec 2023  
**Unique Number** : 10778317 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 408 - Brown City**  
 4235 M-53  
 BROWN CITY, MI  
 US 48416  
 Contact: MARK WOMBLE

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: