


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

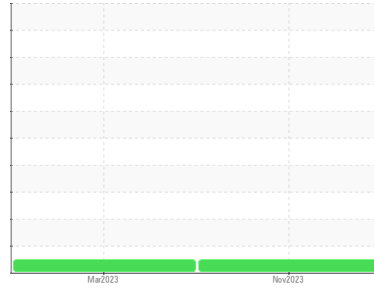

Area  
**(53178PC) Feldman Lumber-Tractor**  
Machine Id  
**[Feldman Lumber-Tractor] 196D251**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0098288</b>	PCA0091122	---
Sample Date	Client Info			<b>21 Nov 2023</b>	20 Mar 2023	---
Machine Age	mls	Client Info		<b>98157</b>	88022	---
Oil Age	mls	Client Info		<b>10135</b>	4728	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>13</b>	11	---
Chromium	ppm	ASTM D5185m	>5	<b>1</b>	<1	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>30	<b>9</b>	6	---
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>150	<b>4</b>	8	---
Tin	ppm	ASTM D5185m	>5	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>20</b>	23	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	50	<b>61</b>	56	---
Manganese	ppm	ASTM D5185m	0	<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m	950	<b>850</b>	776	---
Calcium	ppm	ASTM D5185m	1050	<b>990</b>	1165	---
Phosphorus	ppm	ASTM D5185m	995	<b>886</b>	932	---
Zinc	ppm	ASTM D5185m	1180	<b>1126</b>	1121	---
Sulfur	ppm	ASTM D5185m	2600	<b>2882</b>	2887	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>5</b>	3	---
Sodium	ppm	ASTM D5185m		<b>2</b>	0	---
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	7	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.2</b>	7.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.4</b>	18.4	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.2</b>	13.7	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.0</b>	8.8	---





# OIL ANALYSIS REPORT

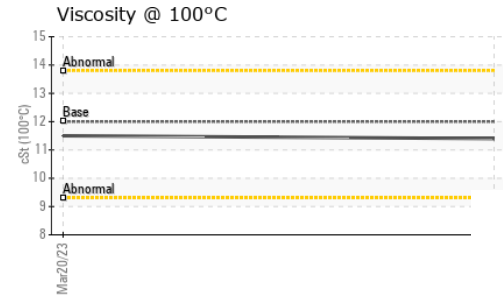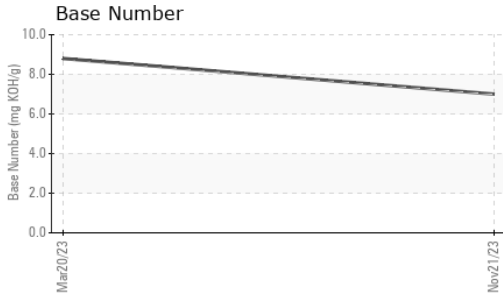

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.4</b>	11.5

## GRAPHS

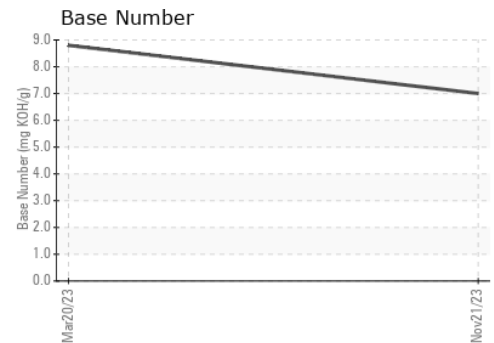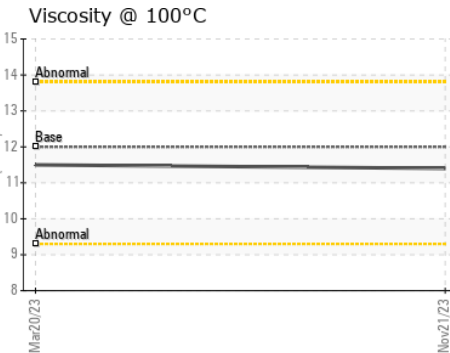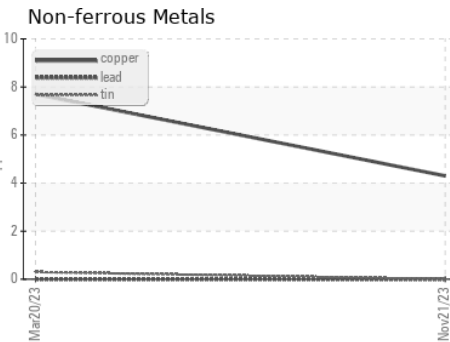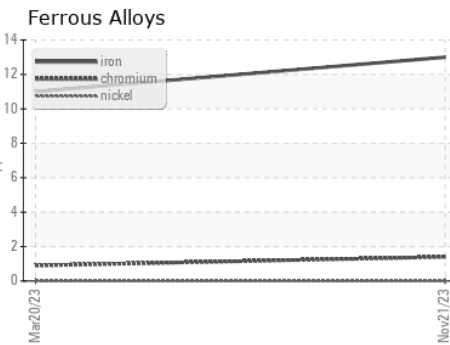

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0098288 **Received** : 07 Dec 2023  
**Lab Number** : **06028534** **Diagnosed** : 09 Dec 2023  
**Unique Number** : 10778325 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1960 - Feldman Lumber Service**  
 1281 Metropolitan Avenue  
 Brooklyn, NY  
 US 11237  
 Contact: Marc Fried  
 mrfried@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: