

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

SENNEBOGEN 840E MH-82

Component

Rear Left Planetary

GEAR OIL SAE 80W90 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORMATION method limit/base current history1 history1 Sample Number Client Info PCA0113890 Sample Date Client Info 16 Nov 2023 Machine Age hrs Client Info 230 Oil Age hrs Client Info Changed Oil Changed Client Info Changed Sample Status NORMAL CONTAMINATION method limit/base current history1 history1 Water WC Method >0.2 NEG WEAR METALS method limit/base current history1 history1 history1 Iron ppm ASTM D5185m >500 113 Iron ppm ASTM D5185m >10 <1 Iron ppm	ory2	
Sample Date Client Info 16 Nov 2023 Machine Age hrs Client Info 230 Oil Age hrs Client Info 0 Oil Changed Client Info Changed Sample Status NORMAL CONTAMINATION method limit/base current history1 history1 WEAR METALS method limit/base current history1 history1 Iron ppm ASTM D5185m >500 113 WEAR METALS method limit/base current history1 history1 history1 Iron ppm ASTM D5185m >500 113 WEAR METALS method limit/base current history1 history1 Iron ppm ASTM D5185m >10 <1 Iron		
Machine Age hrs Client Info 230 Oil Age hrs Client Info 0 Oil Changed Client Info Changed Sample Status NORMAL CONTAMINATION method limit/base current history1 history1 Water WC Method >0.2 NEG WEAR METALS method limit/base current history1 history1 Iron ppm ASTM D5185m >500 113 Iron ppm ASTM D5185m >10 <1		
Oil Age hrs Client Info 0 Oil Changed Client Info Changed Sample Status NORMAL CONTAMINATION method limit/base current history1 history1 WEAR METALS method limit/base current history1 history1 Iron ppm ASTM D5185m >500 113 Chromium ppm ASTM D5185m >10 <1		
Oil Changed Sample Status Client Info Changed NORMAL CONTAMINATION method limit/base current history1 history1 Water WC Method >0.2 NEG WEAR METALS method limit/base current history1 history1 Iron ppm ASTM D5185m >500 113 Chromium ppm ASTM D5185m >10 <1		
Sample Status NORMAL CONTAMINATION method limit/base current history1 history1 WEAR METALS method limit/base current history1 history1 Iron ppm ASTM D5185m >500 113 Chromium ppm ASTM D5185m >10 <1	<td></td>	
CONTAMINATION method limit/base current history1 history1 Water WC Method >0.2 NEG WEAR METALS method limit/base current history1 history1 Iron ppm ASTM D5185m >500 113 Chromium ppm ASTM D5185m >10 <1		
Water WC Method >0.2 NEG WEAR METALS method limit/base current history1 history1 Iron ppm ASTM D5185m >500 113 Chromium ppm ASTM D5185m >10 <1		
WEAR METALS method limit/base current history1 history1 Iron ppm ASTM D5185m >500 113 Chromium ppm ASTM D5185m >10 <1	ory2	
Iron ppm ASTM D5185m >500 113 Chromium ppm ASTM D5185m >10 <1 Nickel ppm ASTM D5185m >10 <1 Titanium ppm ASTM D5185m 0 Silver ppm ASTM D5185m >25 1 Aluminum ppm ASTM D5185m >25 0 Lead ppm ASTM D5185m >75 18 Tin ppm ASTM D5185m >10 0 Vanadium ppm ASTM D5185m 0	ory2	
Chromium ppm ASTM D5185m >10 <1 Nickel ppm ASTM D5185m >10 <1		
Nickel ppm ASTM D5185m >10 <1 Titanium ppm ASTM D5185m 0 Silver ppm ASTM D5185m 0 Aluminum ppm ASTM D5185m >25 1 Lead ppm ASTM D5185m >75 18 Copper ppm ASTM D5185m >10 0 Vanadium ppm ASTM D5185m 0		
Titanium ppm ASTM D5185m 0 Silver ppm ASTM D5185m 0 Aluminum ppm ASTM D5185m >25 1 Lead ppm ASTM D5185m >25 0 Copper ppm ASTM D5185m >75 18 Tin ppm ASTM D5185m >10 0 Vanadium ppm ASTM D5185m 0		
Silver ppm ASTM D5185m 0 Aluminum ppm ASTM D5185m >25 1 Lead ppm ASTM D5185m >25 0 Copper ppm ASTM D5185m >75 18 Tin ppm ASTM D5185m >10 0 Vanadium ppm ASTM D5185m 0		
Aluminum ppm ASTM D5185m >25 1 Lead ppm ASTM D5185m >25 0 Copper ppm ASTM D5185m >75 18 Tin ppm ASTM D5185m >10 0 Vanadium ppm ASTM D5185m 0		
Lead ppm ASTM D5185m >25 0 Copper ppm ASTM D5185m >75 18 Tin ppm ASTM D5185m >10 0 Vanadium ppm ASTM D5185m 0		
Copper ppm ASTM D5185m >75 18 Tin ppm ASTM D5185m >10 0 Vanadium ppm ASTM D5185m 0		
Tin ppm ASTM D5185m >10 0 Vanadium ppm ASTM D5185m 0		
Vanadium ppm ASTM D5185m 0		
Cadmium ppm ASTM D5185m 0		
ADDITIVES method limit/base current history1 history1	ory2	
Boron ppm ASTM D5185m 400 <1		
Barium ppm ASTM D5185m 200 362		
Molybdenum ppm ASTM D5185m 12 0		
Manganese ppm ASTM D5185m 2		
Magnesium ppm ASTM D5185m 12 1		
Calcium ppm ASTM D5185m 150 8		
Phosphorus ppm ASTM D5185m 1650 1141		
Zinc ppm ASTM D5185m 125 16		
Sulfur ppm ASTM D5185m 22500 29356		
CONTAMINANTS method limit/base current history1 history	ory2	
Silicon ppm ASTM D5185m >75 9		
Sodium ppm ASTM D5185m >170 5		
Potassium ppm ASTM D5185m >20 <1		
FLUID DEGRADATION method limit/base current history1 history	ory2	

Acid Number (AN) mg KOH/g ASTM D8045 2.00

1.39



OIL ANALYSIS REPORT

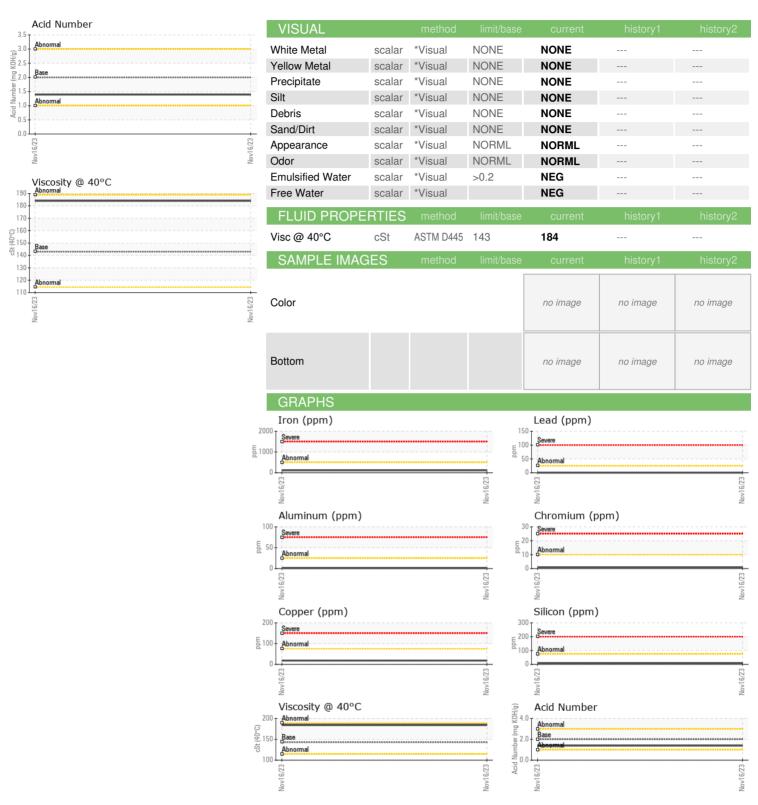





Certificate L2367

Laboratory Sample No. Lab Number

Unique Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PCA0113890 : 06028775 : 10778566

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Test Package : MOB 2

: 07 Dec 2023 Received Diagnosed : Wes Davis Diagnostician

: 09 Dec 2023

SCRAP METAL SERVICES (SMS Mill Services LLC) 250 WEST U.S. HWY 12 CHESTERTON, IN

US 46304

Contact: DOMINIC WHITE dwhite@scrapmetalservices.com

T:

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: