


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

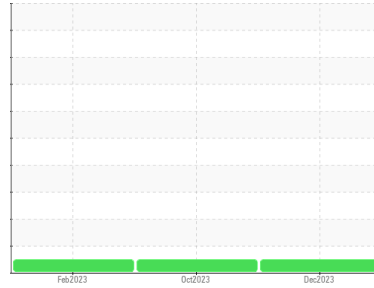

Area  
**FUEL**  
 Machine Id  
**454**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0109682</b>	PCA0104668	PCA0066696
Sample Date	Client Info		<b>05 Dec 2023</b>	27 Oct 2023	21 Feb 2023
Machine Age	mls	Client Info	<b>265769</b>	211618	211618
Oil Age	mls	Client Info	<b>16000</b>	211618	211618
Oil Changed	Client Info		<b>Changed</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	<b>10</b>	7	10
Chromium	ppm	ASTM D5185m	>6	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>50	<b>3</b>	3	6
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>2</b>	2	2
Tin	ppm	ASTM D5185m	>6	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	2	<b>2</b>	1	4
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>60</b>	57	62
Manganese	ppm	ASTM D5185m	0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m	950	<b>993</b>	930	995
Calcium	ppm	ASTM D5185m	1050	<b>1111</b>	1010	1127
Phosphorus	ppm	ASTM D5185m	995	<b>1061</b>	980	1051
Zinc	ppm	ASTM D5185m	1180	<b>1309</b>	1203	1319
Sulfur	ppm	ASTM D5185m	2600	<b>2941</b>	2807	3748

### CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>50	<b>3</b>	2	3
Sodium	ppm	ASTM D5185m		<b>2</b>	2	<1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	3	4



### INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.9	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.5</b>	10.7	7.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.6</b>	22.8	18.7

### FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.9</b>	18.8	14.4
Base Number (BN)	mg KOH/g	ASTM D2896		<b>11.06</b>	9.53	10.77









# OIL ANALYSIS REPORT

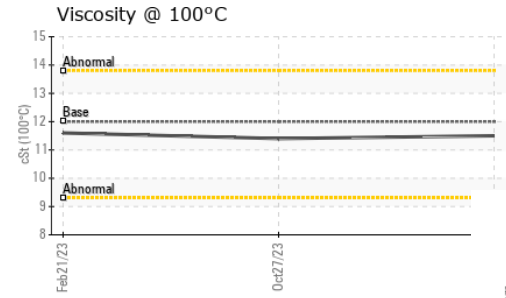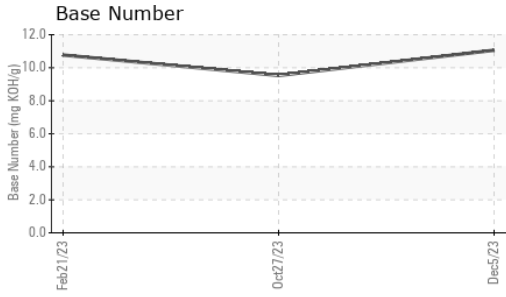

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.5	11.4

## GRAPHS

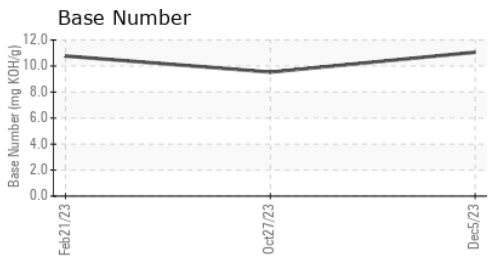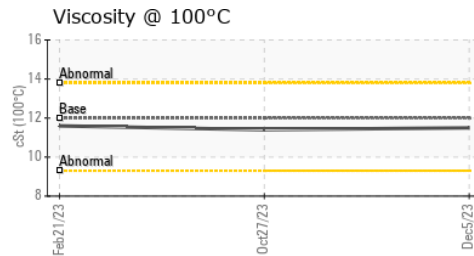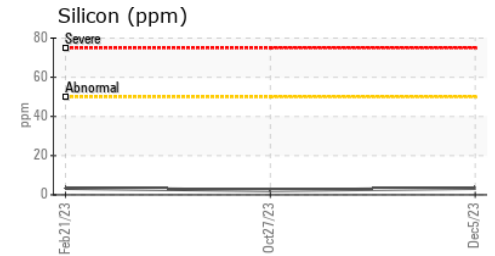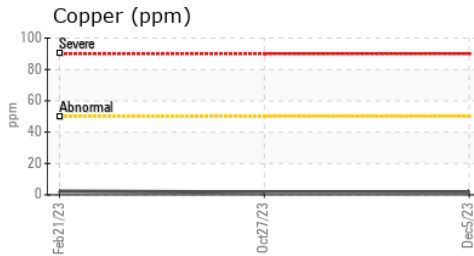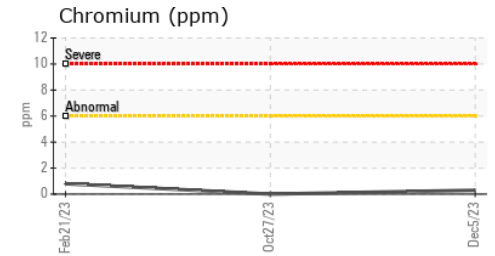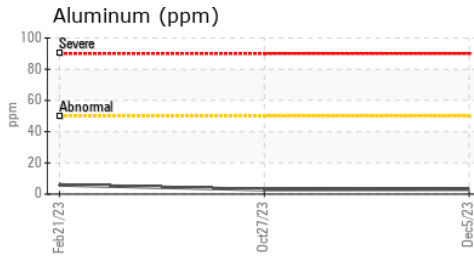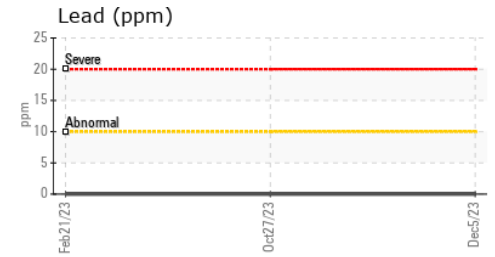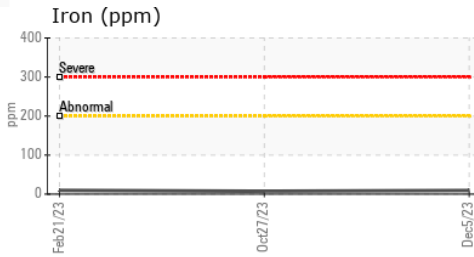

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0109682 **Received** : 07 Dec 2023  
**Lab Number** : 06028825 **Diagnosed** : 11 Dec 2023  
**Unique Number** : 10778616 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**DENNIS K BURKE INC - INTERNAL SAMPLES**  
 555 CONSTITUTION DR  
 TAUNTON, MA  
 US 02780  
 Contact: GREG DUNKER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: (617)889-6422