


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

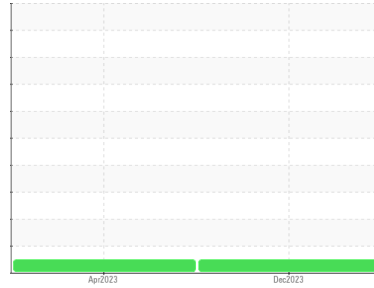

Area  
**FUEL**  
 Machine Id  
**439**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0109683</b>	PCA0066611	---
Sample Date	Client Info		<b>05 Dec 2023</b>	07 Apr 2023	---
Machine Age	mls	Client Info	<b>293336</b>	263681	---
Oil Age	mls	Client Info	<b>16000</b>	12000	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>13</b>	7
Chromium	ppm	ASTM D5185m	>6	<b>1</b>	<1
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0
Aluminum	ppm	ASTM D5185m	>50	<b>6</b>	3
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0
Copper	ppm	ASTM D5185m	>50	<b>2</b>	0
Tin	ppm	ASTM D5185m	>6	<b>0</b>	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>6</b>	6
Barium	ppm	ASTM D5185m	0	<b>0</b>	0
Molybdenum	ppm	ASTM D5185m	50	<b>58</b>	58
Manganese	ppm	ASTM D5185m	0	<b>0</b>	<1
Magnesium	ppm	ASTM D5185m	950	<b>939</b>	938
Calcium	ppm	ASTM D5185m	1050	<b>1074</b>	1054
Phosphorus	ppm	ASTM D5185m	995	<b>1004</b>	963
Zinc	ppm	ASTM D5185m	1180	<b>1237</b>	1214
Sulfur	ppm	ASTM D5185m	2600	<b>2871</b>	3175

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>4</b>	3
Sodium	ppm	ASTM D5185m		<b>2</b>	<1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1



### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.1</b>	6.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.7</b>	18.1

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.8</b>	13.5
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.90</b>	10.72









# OIL ANALYSIS REPORT

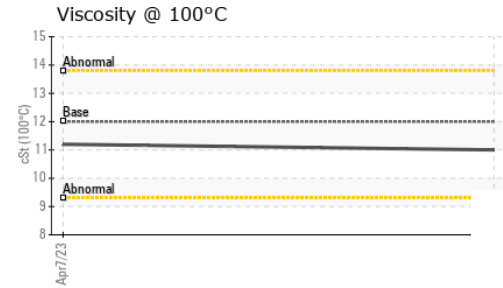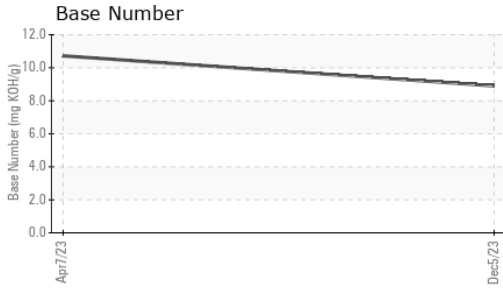

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.0</b>	11.2	---

## GRAPHS

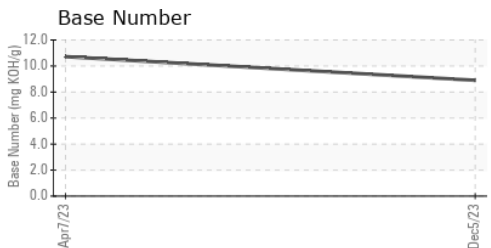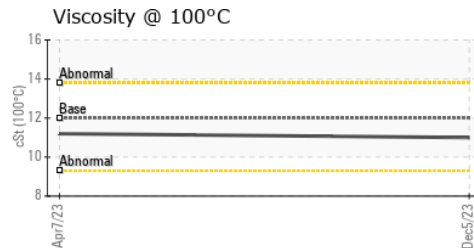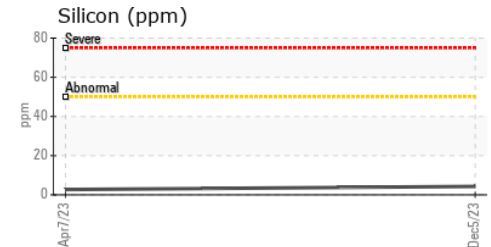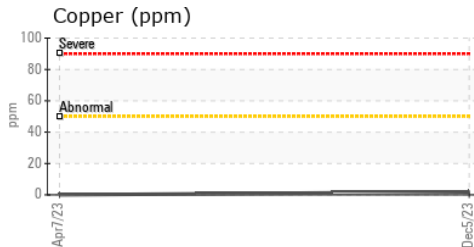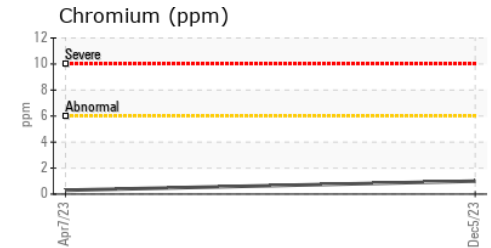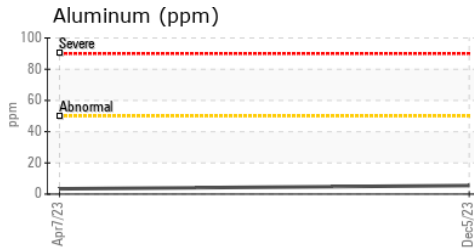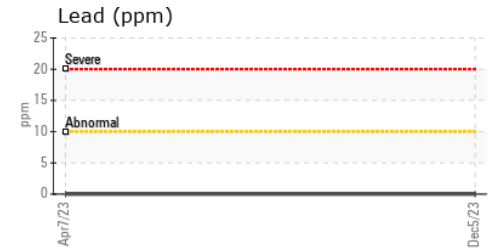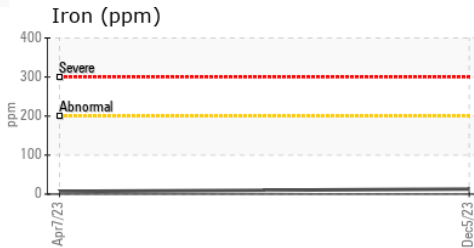

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0109683 **Received** : 07 Dec 2023  
**Lab Number** : **06028831** **Diagnosed** : 11 Dec 2023  
**Unique Number** : 10778622 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**DENNIS K BURKE INC - INTERNAL SAMPLES**  
 555 CONSTITUTION DR  
 TAUNTON, MA  
 US 02780  
 Contact: GREG DUNKER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: (617)889-6422