




PROBLEM SUMMARY

Sample Rating Trend

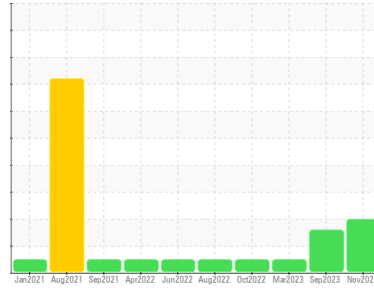

DEGRADATION




Machine Id
725012-582

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

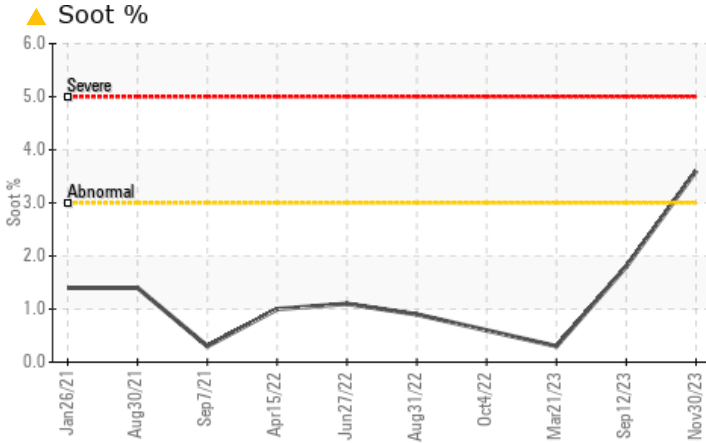

RECOMMENDATION

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. We recommend you service the filters on this component. Resample at the next service interval to monitor. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	ABNORMAL	NORMAL
Soot %	%	*ASTM D7844	>3	▲ 3.6	1.8	0.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	▲ 2.3	9.0	9.6

Customer Id: GFL626
 Sample No.: GFL0100047
 Lab Number: 06029092
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Alert	---	---	?	NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.
Check Combustion	---	---	?	We advise that you check for faulty combustion, plugged air filters, or aftercoolers.

HISTORICAL DIAGNOSIS

12 Sep 2023 Diag: Don Baldrige

WEAR



No corrective action is recommended at this time. We recommend an early resample to monitor this condition. Piston, ring and cylinder wear is indicated. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

view report



21 Mar 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



04 Oct 2022 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report





OIL ANALYSIS REPORT


Sample Rating Trend

DEGRADATION

Machine Id
725012-582

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

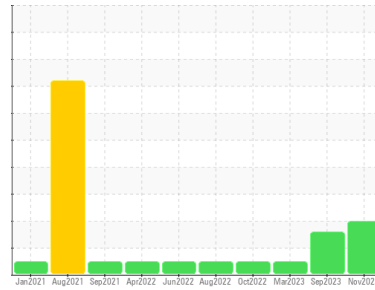

DIAGNOSIS

Recommendation

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. We recommend you service the filters on this component. Resample at the next service interval to monitor. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

Wear

All component wear rates are normal.

Contamination

There is an abnormal amount of solids and carbon present in the oil.

Fluid Condition

The BN level is low.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0100047	GFL0062250	GFL0062176
Sample Date	Client Info	30 Nov 2023	12 Sep 2023	21 Mar 2023
Machine Age	hrs	15470	15295	15197
Oil Age	hrs	325	227	300
Oil Changed	Client Info	Not Changed	Not Changed	Not Changed
Sample Status		ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	97	▲ 107	28
Chromium	ppm ASTM D5185m >20	5	7	3
Nickel	ppm ASTM D5185m >4	0	2	<1
Titanium	ppm ASTM D5185m	<1	<1	<1
Silver	ppm ASTM D5185m >3	0	0	2
Aluminum	ppm ASTM D5185m >20	19	▲ 24	6
Lead	ppm ASTM D5185m >40	0	<1	2
Copper	ppm ASTM D5185m >330	118	35	27
Tin	ppm ASTM D5185m >15	0	2	<1
Vanadium	ppm ASTM D5185m	0	<1	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	5	7	7
Barium	ppm ASTM D5185m 0	5	3	5
Molybdenum	ppm ASTM D5185m 60	66	84	61
Manganese	ppm ASTM D5185m 0	2	9	8
Magnesium	ppm ASTM D5185m 1010	793	1123	870
Calcium	ppm ASTM D5185m 1070	1045	1500	1276
Phosphorus	ppm ASTM D5185m 1150	916	1278	1036
Zinc	ppm ASTM D5185m 1270	1095	1604	1251
Sulfur	ppm ASTM D5185m 2060	2774	4143	3547

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	15	22	15
Sodium	ppm ASTM D5185m	<1	6	0
Potassium	ppm ASTM D5185m >20	4	8	3
Fuel	% ASTM D3524 >5	<1.0	<1.0	<1.0

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	▲ 3.6	1.8	0.3
Nitration	Abs/cm *ASTM D7624 >20	11.0	9.4	5.9
Sulfation	Abs/.1mm *ASTM D7415 >30	24.8	21.2	18.1

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	14.3	14.4	13.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	▲ 2.3	9.0	9.6







OIL ANALYSIS REPORT

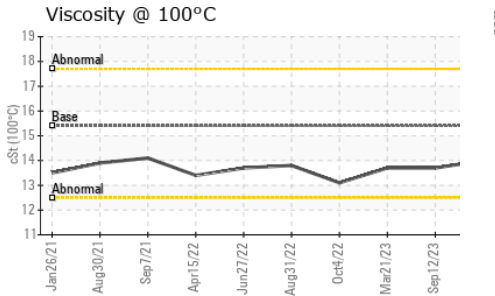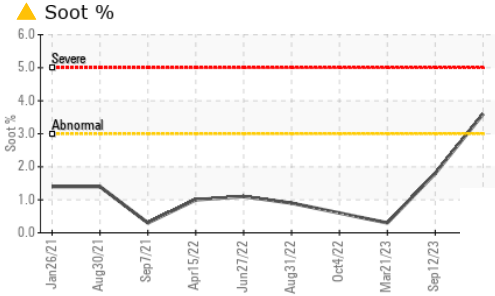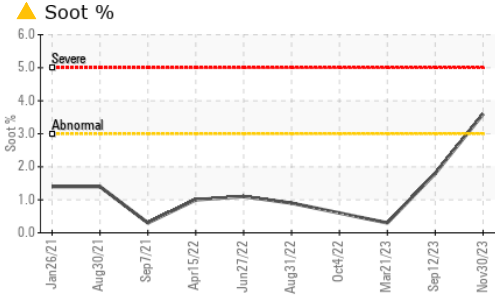

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.0	13.7

GRAPHS

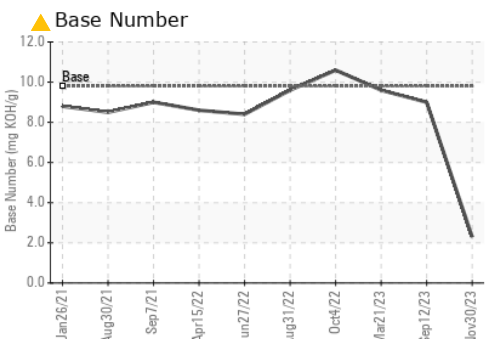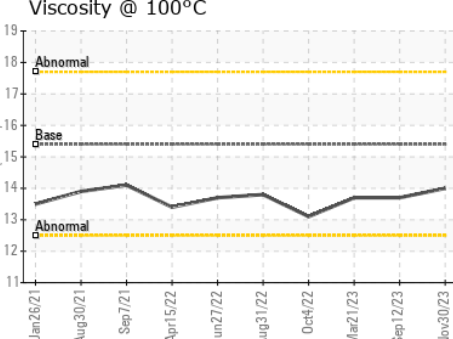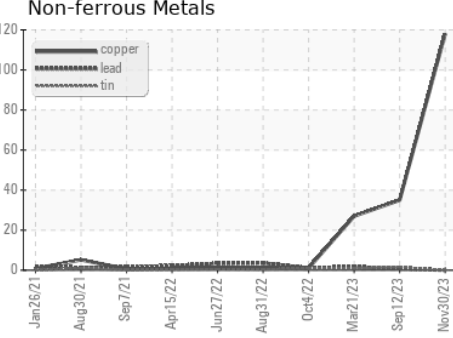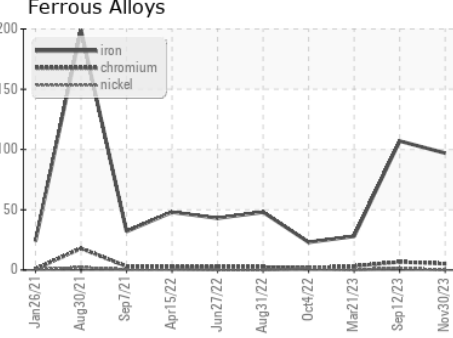

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0100047
 Lab Number : 06029092
 Unique Number : 10778883
 Test Package : FLEET (Additional Tests: FuelDilution)

GFL Environmental - 626 - Cadillac Hauling
 1501 Ron Wilson St
 Cadillac, MI
 US 49601
 Contact: GARY BREWER
 gbrewerjr@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: