




# OIL ANALYSIS REPORT

Sample Rating Trend

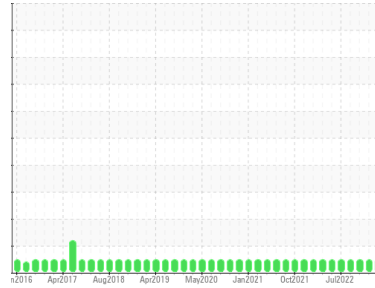

**NORMAL**



Machine Id  
**10518C ISL**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (28 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0103261</b>	GFL0087089	GFL0056624
Sample Date	Client Info		<b>06 Dec 2023</b>	20 Jun 2023	30 Mar 2023
Machine Age	hrs	Client Info	<b>7044</b>	5865	5268
Oil Age	hrs	Client Info	<b>0</b>	619	2041
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>15</b>	10	20
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>2</b>	<1	4
Lead	ppm	ASTM D5185m >30	<b>0</b>	<1	3
Copper	ppm	ASTM D5185m >35	<b>&lt;1</b>	2	3
Tin	ppm	ASTM D5185m >4	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>5</b>	7	4
Barium	ppm	ASTM D5185m 5	<b>3</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>56</b>	55	56
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 560	<b>538</b>	517	619
Calcium	ppm	ASTM D5185m 1510	<b>1530</b>	1647	1798
Phosphorus	ppm	ASTM D5185m 780	<b>708</b>	694	765
Zinc	ppm	ASTM D5185m 870	<b>945</b>	969	1048
Sulfur	ppm	ASTM D5185m 2040	<b>2352</b>	2717	3277

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>11</b>	3	4
Sodium	ppm	ASTM D5185m	<b>7</b>	6	15
Potassium	ppm	ASTM D5185m >20	<b>16</b>	8	7

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.1</b>	10.9	12.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.0</b>	21.2	25.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.0</b>	18.2	20.5
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>2.7</b>	4.9	3.1







# OIL ANALYSIS REPORT

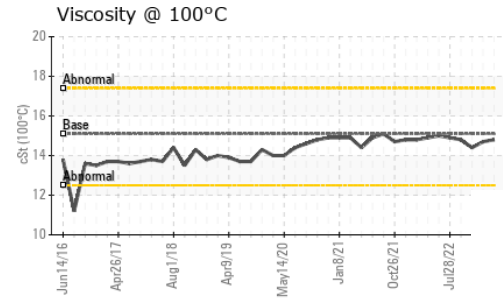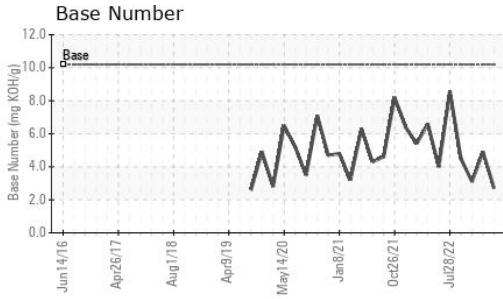

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	<b>14.8</b>	14.7	14.4

## GRAPHS

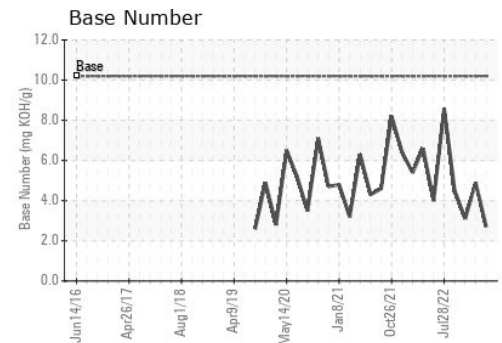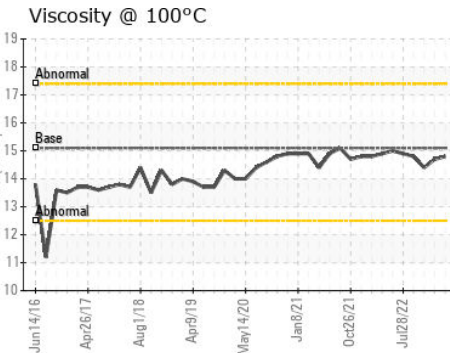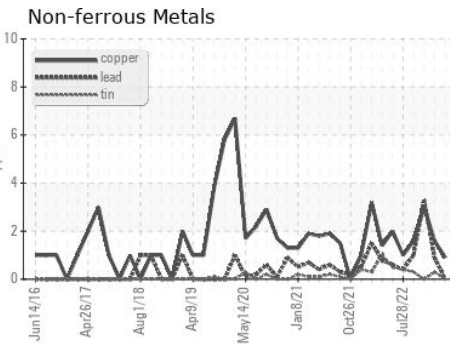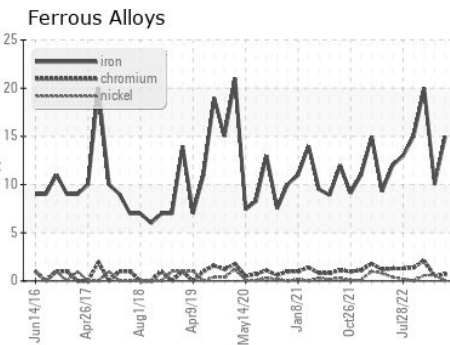

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0103261 **Received** : 08 Dec 2023  
**Lab Number** : **06029097** **Diagnosed** : 09 Dec 2023  
**Unique Number** : 10778888 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 001 - Raleigh(CNG)**  
 3741 Conquest Drive  
 Garner, NC  
 US 27529  
 Contact: Craig Johnson  
 craig.johnson@gflenv.com  
 T: (919)662-7100  
 F: (919)662-7130

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)