


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

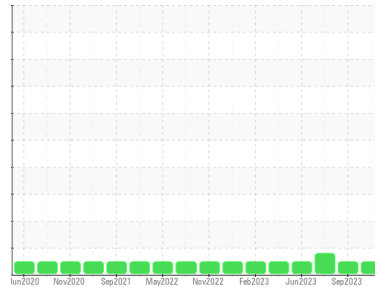

Area  
**FLEET**  
Machine Id  
**VOLVO 1926727**

Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (---)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0108200</b>	PCA0102836	PCA0095984
Sample Date	Client Info			<b>30 Nov 2023</b>	05 Sep 2023	01 Jun 2023
Machine Age	mls Client Info			<b>351050</b>	331576	310829
Oil Age	mls Client Info			<b>19474</b>	44182	16373
Oil Changed	Client Info			<b>Not Changed</b>	Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0	
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG	
Glycol	WC Method		<b>NEG</b>	NEG	NEG	

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>8</b>	17	▲ 107
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	2
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	1	10
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>3</b>	6	6
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>2</b>	<1	3
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m	50	<b>56</b>	56	66
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m	950	<b>913</b>	965	1043
Calcium	ppm	ASTM D5185m	1050	<b>1000</b>	1070	1230
Phosphorus	ppm	ASTM D5185m	995	<b>997</b>	923	1140
Zinc	ppm	ASTM D5185m	1180	<b>1219</b>	1209	1387
Sulfur	ppm	ASTM D5185m	2600	<b>2937</b>	3121	3128

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>3</b>	4	11
Sodium	ppm	ASTM D5185m		<b>6</b>	10	44
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	3	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.4	1.9
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.7</b>	9.7	13.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.2</b>	22.2	26.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.5</b>	18.3	24.1
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.9</b>	5.8	6.1





# OIL ANALYSIS REPORT

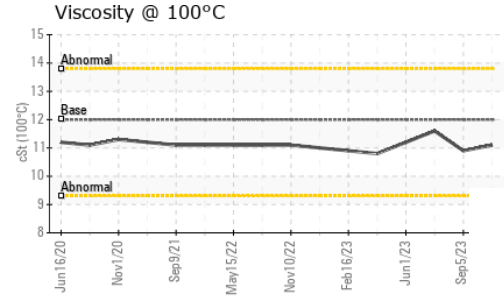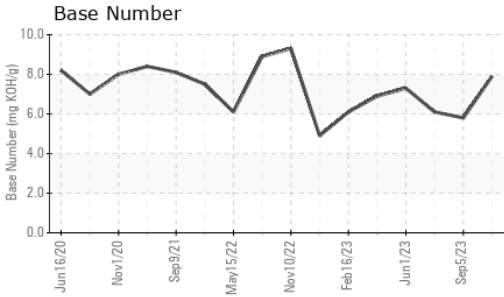

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.1</b>	10.9	11.6

## GRAPHS

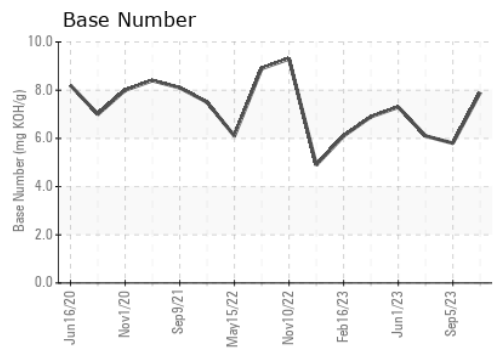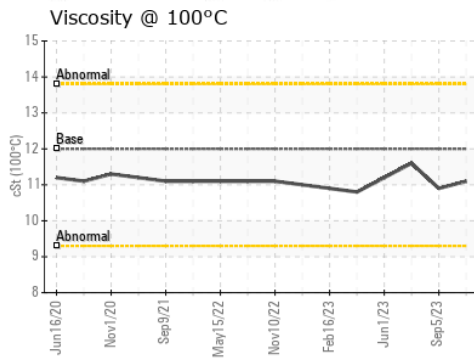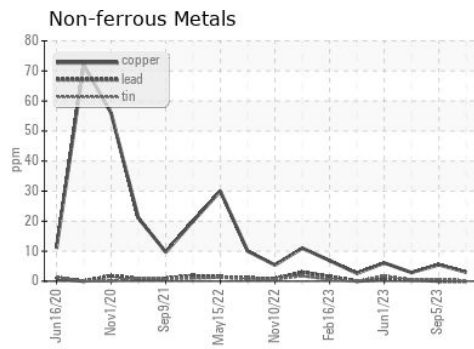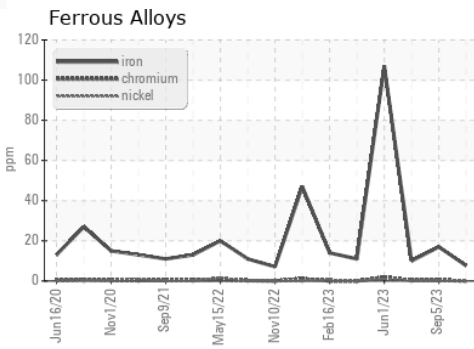

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0108200  
**Lab Number** : **06029261**  
**Unique Number** : 10779052  
**Test Package** : FLEET

**Received** : 08 Dec 2023  
**Diagnosed** : 11 Dec 2023  
**Diagnostician** : Wes Davis

**PERDUE FARMS - ACCOMAC**  
 22520 LANKFORD HWY  
 ACCOMAC, VA  
 US 23301  
 Contact: PEGGY KIMES  
 peggy.kimes@perdue.com  
 T: (757)787-5304  
 F: (757)787-5208

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)