

# **PROBLEM SUMMARY**

Sample Rating Trend


DIRT

Machine Id
DT41
Component
Rear Diffe

**Rear Differential** 

NOT GIVEN (--- GAL)

### **COMPONENT CONDITION SUMMARY**

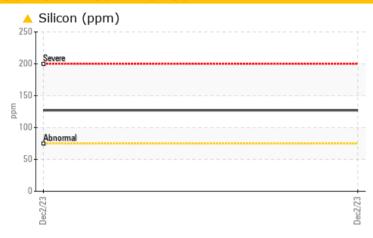

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

# PROBLEMATIC TEST RESULTS Sample Status ABNORMAL -- -- Silicon ppm ASTM D5185m >75 127 -- --

Customer Id: NWWCOL Sample No.: PCA0104203 Lab Number: 06029784 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

# RECOMMENDED ACTIONS

There are no recommended actions for this sample.

### HISTORICAL DIAGNOSIS



# **OIL ANALYSIS REPORT**

Sample Rating Trend



DT41
Component

**Rear Differential** 

**NOT GIVEN (--- GAL)** 

# DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

### **Fluid Condition**

The condition of the oil is acceptable for the time in service.

				Dec2023		
SAMPLE INFO	RMATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0104203		
Sample Date		Client Info		02 Dec 2023		
Machine Age	mls	Client Info		31510		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
CONTAMINA	TION	method	limit/base	current	history1	history2
Water		WC Method	>.2	NEG		
WEAR META	LS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	175		
Chromium	ppm	ASTM D5185m	>10	2		
Nickel	ppm	ASTM D5185m	>10	6		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	11		
Lead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m	>100	<1		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		159		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		4		
Magnesium	ppm	ASTM D5185m		2		
Calcium	ppm	ASTM D5185m		30		
Phosphorus	ppm	ASTM D5185m		1111		
Zinc	ppm	ASTM D5185m		6		
Sulfur	ppm	ASTM D5185m		24533		
CONTAMINA	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<u> </u>		
Sodium	ppm	ASTM D5185m		3		
Potassium	ppm	ASTM D5185m	>20	2		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	LIGHT		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		

Odor

**Emulsified Water** 

Free Water

scalar \*Visual

scalar \*Visual

\*Visual

scalar

NORML

>.2


**NORML** 

NEG

NEG



# **OIL ANALYSIS REPORT**

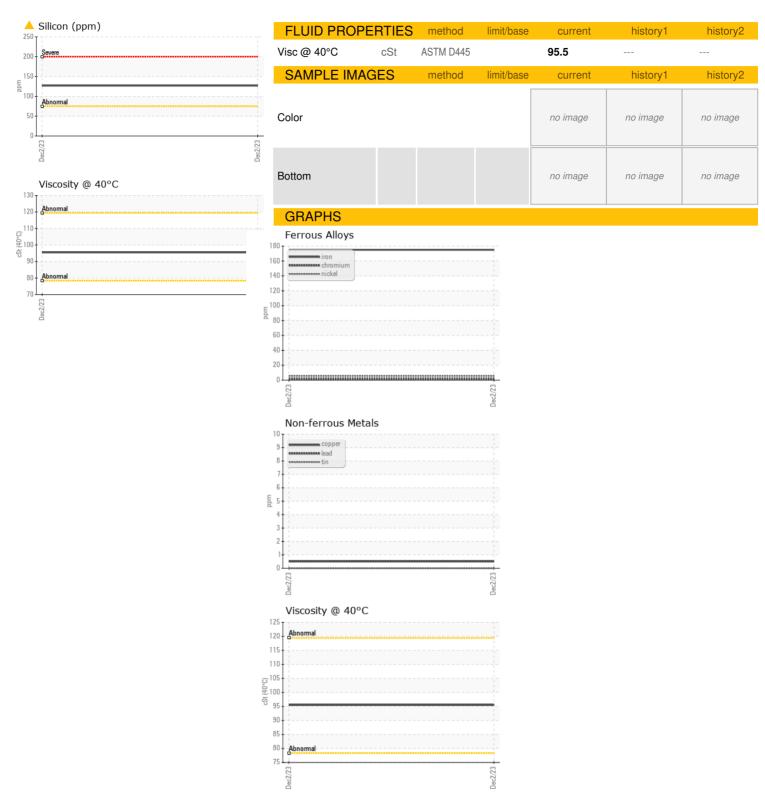





Laboratory Sample No. Lab Number

Unique Number : 10779575 Test Package : FLEET

To discuss this sample report, contact Customer Service at 1-800-237-1369.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PCA0104203 Received : 08 Dec 2023 : 12 Dec 2023 : 06029784 Diagnosed Diagnostician : Don Baldridge

NW WHITE & CO - COLUMBIA DIVISION 100 INDEPENDENCE BLVD

COLUMBIA, SC US 29210 Contact: GEORGE EDWARDS

gedwards@nwwhite.com T:

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: