

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Machine Id 920093-260372

Component Diesel Engine

Fluid PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0102554	GFL0093693	GFL0087728
Sample Date		Client Info		30 Nov 2023	17 Oct 2023	28 Jul 2023
Machine Age	hrs	Client Info		8793	8534	8088
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	6	8	10
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	2	3
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	0	3	<1
Tin	ppm	ASTM D5185m	>15	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
	le le			U	0	0
ADDITIVES	le le	method	limit/base	current	history1	history2
ADDITIVES Boron	ppm		limit/base		-	-
		method		current	history1	history2
Boron	ppm	method ASTM D5185m	0	current <1	history1 2 0 61	history2 0
Boron Barium	ppm ppm	method ASTM D5185m ASTM D5185m	0 0 60 0	current <1 0	history1 2 0	history2 0 0
Boron Barium Molybdenum	ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60	current <1 0 68	history1 2 0 61	history2 0 0 58
Boron Barium Molybdenum Manganese	ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0	<pre>current <1 0 68 0</pre>	history1 2 0 61 <1	history2 0 0 58 <1
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010	current <1 0 68 0 1086	history1 2 0 61 <1 990 1104 1041	history2 0 58 <1 972 1057 951
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270	Current <1 0 68 0 1086 1149	history1 2 0 61 <1 990 1104 1041 1298	history2 0 0 58 <1 972 1057 951 1201
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150	Current <1 0 68 0 1086 1149 1112	history1 2 0 61 <1 990 1104 1041	history2 0 58 <1 972 1057 951
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270	Current <1 0 68 0 1086 1149 1112 1382	history1 2 0 61 <1 990 1104 1041 1298	history2 0 0 58 <1 972 1057 951 1201
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060	Current <1 0 68 0 1086 1149 1112 1382 3380	history1 2 0 61 <1 990 1104 1041 1298 3085	history2 0 0 58 <1 972 1057 951 1201 3142
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 1010 1070 1150 1270 2060	Current <1 0 68 0 1086 1149 1112 1382 3380 Current	history1 2 0 61 <1 990 1104 1041 1298 3085 history1 3 6	history2 0 0 58 <1 972 1057 951 1201 3142 history2 3 6
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 1010 1070 1150 1270 2060	current <1 0 68 0 1086 1149 1112 1382 3380 current 5	history1 2 0 61 <1 990 1104 1041 1298 3085 history1 3	history2 0 0 58 <1 972 1057 951 1201 3142 history2 3
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm TS	method ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060 Limit/base >25	<1 0 68 0 1086 1149 1112 1382 3380 current 5 5 5	history1 2 0 61 <1 990 1104 1041 1298 3085 history1 3 6	history2 0 0 58 <1 972 1057 951 1201 3142 history2 3 6
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm TS	method ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060 limit/base >25 >20	<1 0 68 0 1086 1149 1112 1382 3380 current 5 5 3	history1 2 0 61 <1 990 1104 1041 1298 3085 history1 3 6 3 6 3	history2 0 0 58 <1 972 1057 951 1201 3142 history2 3 6 2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 2060 225 >25	Current <1 0 68 0 1086 1149 1112 1382 3380 Current 5 5 3 Current	history1 2 0 61 <1 990 1104 1041 1298 3085 history1 3 6 3 6 3 history1	history2 0 0 58 <1 972 1057 951 1201 3142 history2 3 6 2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 limit/base >25 >20 limit/base >3	current <1 0 68 0 1086 1149 1112 1382 3380 current 5 5 3 current 0.5	history1 2 0 61 <1 990 1104 1041 1298 3085 history1 3 6 3 6 3 6 3 history1 0.7	history2 0 0 58 <1 972 1057 951 1201 3142 history2 3 6 2 history2 0.8
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 <i>limit/base</i> >25 >20 <i>limit/base</i> >3 >20	<1 0 68 0 1086 1149 1112 1382 3380 current 5 5 3 current 0.5 5.7	history1 2 0 61 <1 990 1104 1041 1298 3085 history1 3 6 3 6 3 0.7 7.0	history2 0 0 58 <1 972 1057 951 1201 3142 history2 3 6 2 history2 0.8 8.2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 2060 225 25 20 220 20 3 20 20 20 20 20 20 20 20 20 20 20 20 20	<1 0 68 0 1086 1149 1112 1382 3380 current 5 5 3 current 0.5 5.7 18.5	history1 2 0 61 <1 990 1104 1041 1298 3085 history1 3 6 3 6 3 0.7 7.0 19.0	history2 0 0 58 <1 972 1057 951 1201 3142 history2 3 6 2 history2 0.8 8.2 19.9



> 13 Abnorma

12

Apr16/20

Sep16/20

OIL ANALYSIS REPORT

scalar


scalar

VISUAL

White Metal

Yellow Metal

Ferrous Alloys





*Visual

*Visual

NONE


NORML

NORML

NEG

NEG

14.4

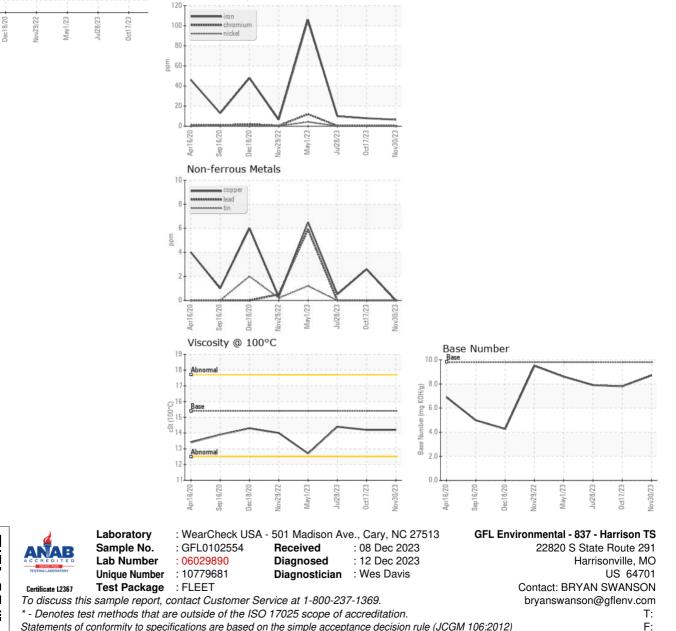

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: BRYAN SWANSON - GFL837