




PROBLEM SUMMARY


Sample Rating Trend

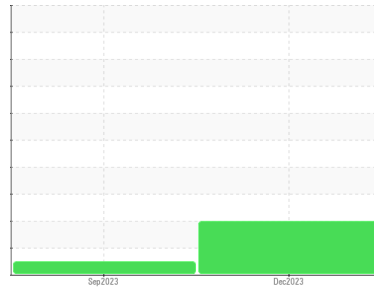

Machine Id
414075
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Silicon (ppm)

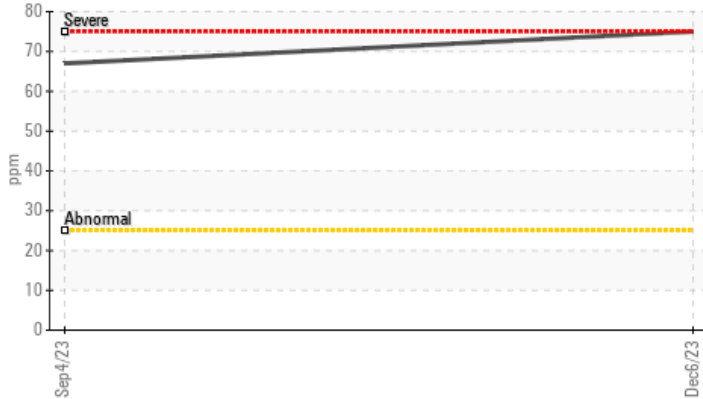

▲ Viscosity @ 100°C



RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	NORMAL	---	
Silicon	ppm	ASTM D5185m >25	▲ 75	67	---
Visc @ 100°C	cSt	ASTM D445 15.4	▲ 9.5	9.5	---

Customer Id: GFL683
 Sample No.: GFL0103099
 Lab Number: 06029945
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

04 Sep 2023 Diag: Sean Felton

NORMAL



Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. Metal levels are typical for a new component breaking in. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

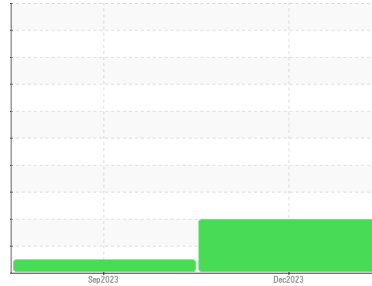

DIRT



Machine Id
414075
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0103099	GFL0091962	---
Sample Date	Client Info	06 Dec 2023	04 Sep 2023	---
Machine Age	hrs	594	38	---
Oil Age	hrs	594	38	---
Oil Changed	Client Info	Changed	N/A	---
Sample Status		ABNORMAL	NORMAL	---

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>120	35	12	---
Chromium	ppm	ASTM D5185m	>20	<1	0	---
Nickel	ppm	ASTM D5185m	>5	3	<1	---
Titanium	ppm	ASTM D5185m	>2	0	0	---
Silver	ppm	ASTM D5185m	>2	<1	0	---
Aluminum	ppm	ASTM D5185m	>20	16	7	---
Lead	ppm	ASTM D5185m	>40	0	0	---
Copper	ppm	ASTM D5185m	>330	124	8	---
Tin	ppm	ASTM D5185m	>15	2	1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	236	461	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	60	144	123	---
Manganese	ppm	ASTM D5185m	0	3	3	---
Magnesium	ppm	ASTM D5185m	1010	701	719	---
Calcium	ppm	ASTM D5185m	1070	1479	1565	---
Phosphorus	ppm	ASTM D5185m	1150	654	687	---
Zinc	ppm	ASTM D5185m	1270	851	803	---
Sulfur	ppm	ASTM D5185m	2060	2248	2813	---

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	▲ 75	67	---
Sodium	ppm	ASTM D5185m		5	4	---
Potassium	ppm	ASTM D5185m	>20	39	14	---
Fuel	%	ASTM D3524	>3.0	<1.0	0.4	---

INFRA-RED





method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>4	0.3	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	9.5	5.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.1	25.5	---

FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.5	20.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.4	10.2	---







OIL ANALYSIS REPORT

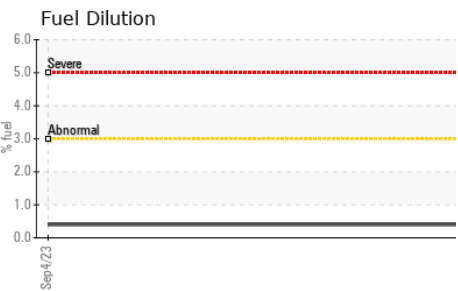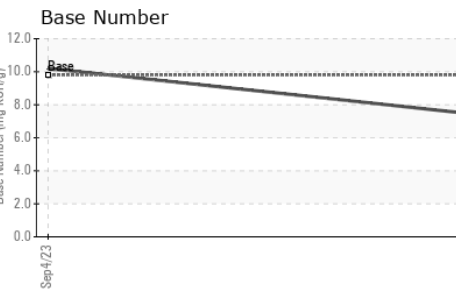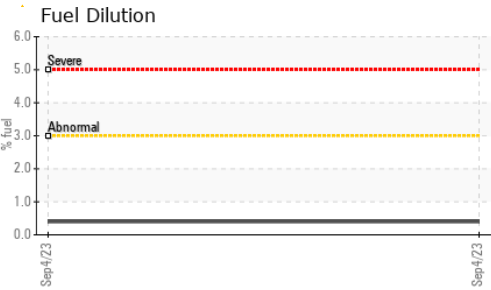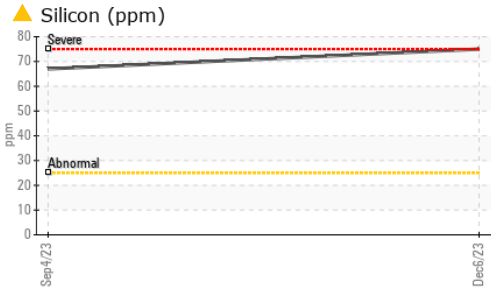

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 9.5	9.5	---

GRAPHS

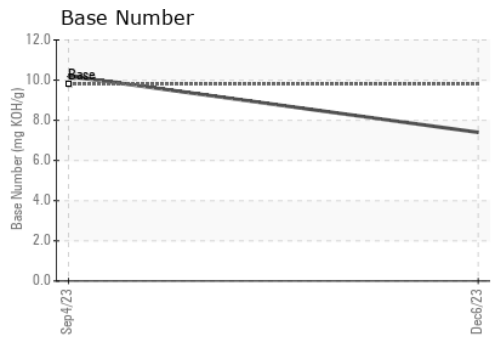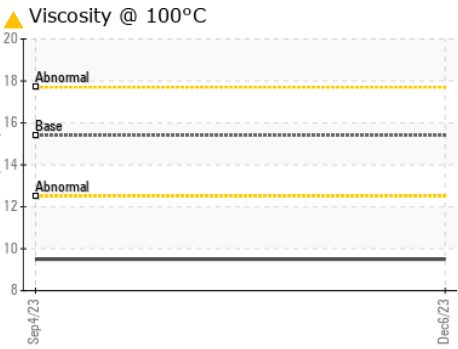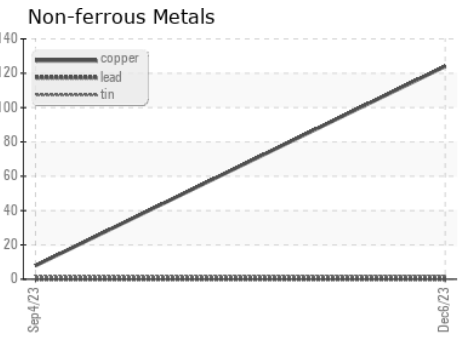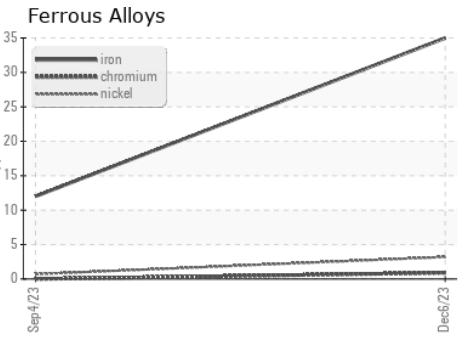

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0103099 **Received** : 08 Dec 2023
Lab Number : 06029945 **Diagnosed** : 12 Dec 2023
Unique Number : 10779736 **Diagnostician** : Don Baldrige
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 683 - Ruckersville Hauling
 261 INDUSTRIAL DR
 Ruckersville, VA
 US 22698
 Contact: Jaf Finney
 jfinney@gflenv.com
 T: (434)990-4972
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)