

# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**


Area  
**EXCAVATOR**  
 Machine Id  
**JOHN DEERE 245GLC 2510**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON HP 15W40 (--- GAL)**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a components first oil change.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0064497</b>	---	---
Sample Date	Client Info		<b>20 Nov 2023</b>	---	---
Machine Age	hrs	Client Info	<b>1800</b>	---	---
Oil Age	hrs	Client Info	<b>1800</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.1	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.21	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>51	<b>2</b>	---
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	---
Aluminum	ppm	ASTM D5185m	>31	<b>2</b>	---
Lead	ppm	ASTM D5185m	>26	<b>0</b>	---
Copper	ppm	ASTM D5185m	>26	<b>&lt;1</b>	---
Tin	ppm	ASTM D5185m	>4	<b>0</b>	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>35</b>	---
Barium	ppm	ASTM D5185m		<b>0</b>	---
Molybdenum	ppm	ASTM D5185m		<b>86</b>	---
Manganese	ppm	ASTM D5185m		<b>0</b>	---
Magnesium	ppm	ASTM D5185m		<b>945</b>	---
Calcium	ppm	ASTM D5185m		<b>1117</b>	---
Phosphorus	ppm	ASTM D5185m		<b>1003</b>	---
Zinc	ppm	ASTM D5185m		<b>1241</b>	---
Sulfur	ppm	ASTM D5185m		<b>3002</b>	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>22	<b>5</b>	---
Sodium	ppm	ASTM D5185m	>31	<b>6</b>	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	---



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.3</b>	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.9</b>	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.7</b>	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>9.0</b>	---









# OIL ANALYSIS REPORT

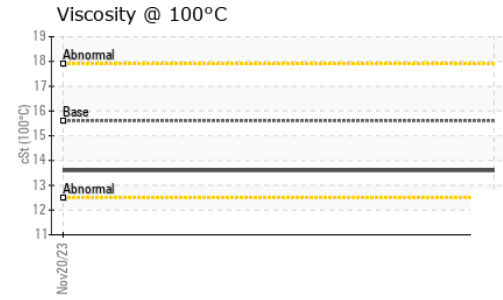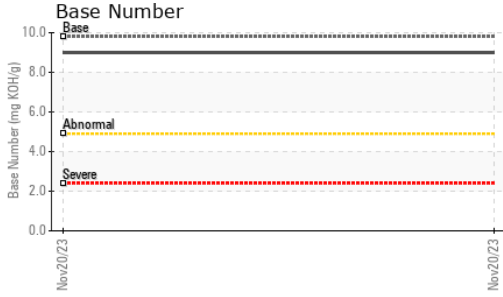

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.6	<b>13.6</b>	---

## GRAPHS

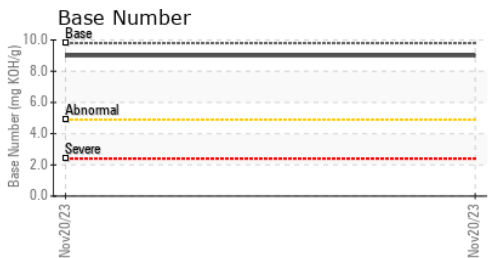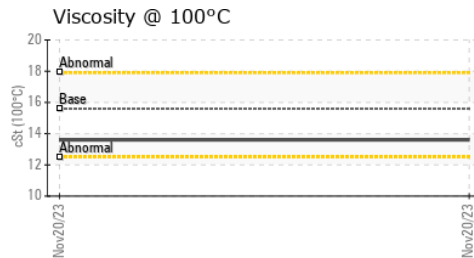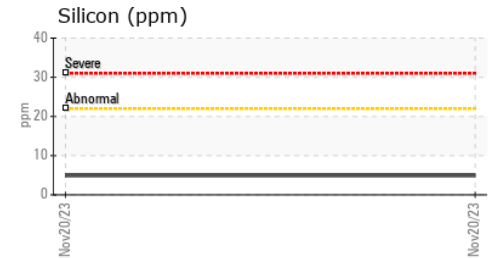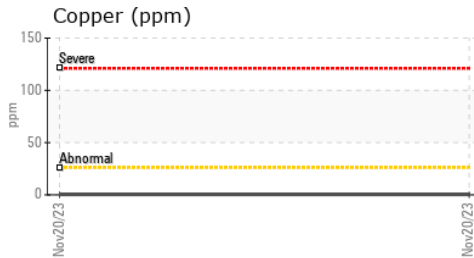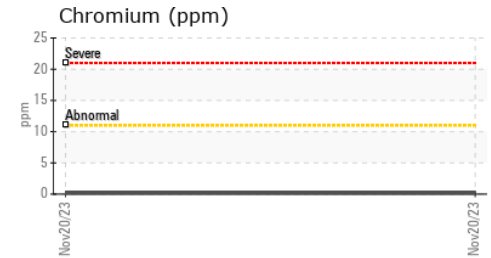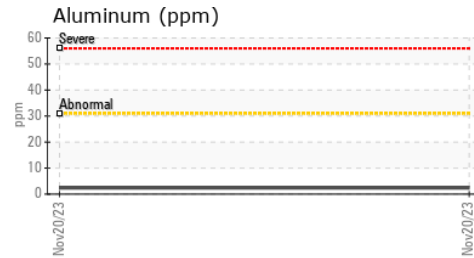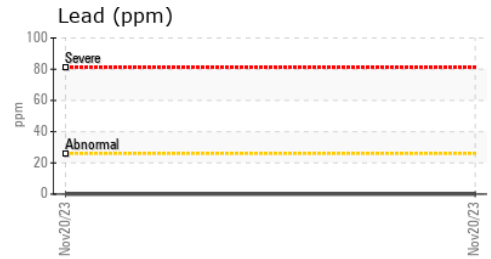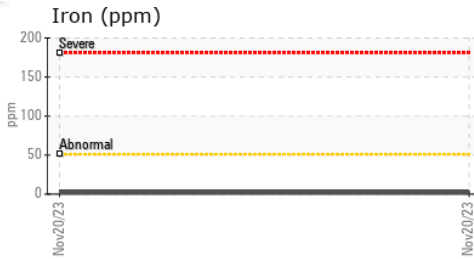

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0064497 **Received** : 08 Dec 2023  
**Lab Number** : **06029956** **Diagnosed** : 12 Dec 2023  
**Unique Number** : 10779747 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**D-CONSTRUCTION**  
 1488 S BROADWAY  
 COAL CITY, IL  
 US 60416  
 Contact: J. MASCOLO  
 J.MASCOLO@DCONSTRUCTION.COM  
 T: (815)518-3150  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)