




# OIL ANALYSIS REPORT

Sample Rating Trend

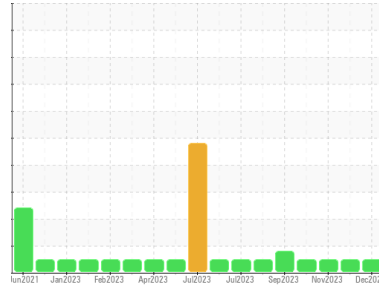

**NORMAL**



Machine Id  
**920056-102721**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 MULTIGRADE 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0098444</b>	GFL0098459	GFL0098452
Sample Date	Client Info	<b>07 Dec 2023</b>	14 Nov 2023	03 Nov 2023
Machine Age	hrs	<b>5801</b>	5663	5619
Oil Age	hrs	<b>468</b>	330	286
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>3</b>	8	8
Chromium	ppm ASTM D5185m >4	<b>0</b>	<1	<1
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >25	<b>1</b>	5	2
Lead	ppm ASTM D5185m >45	<b>0</b>	0	<1
Copper	ppm ASTM D5185m >85	<b>4</b>	21	21
Tin	ppm ASTM D5185m >4	<b>0</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 151	<b>60</b>	89	91
Barium	ppm ASTM D5185m 0.4	<b>0</b>	0	6
Molybdenum	ppm ASTM D5185m 250	<b>68</b>	87	78
Manganese	ppm ASTM D5185m	<b>0</b>	<1	0
Magnesium	ppm ASTM D5185m 0	<b>862</b>	979	791
Calcium	ppm ASTM D5185m 2046	<b>944</b>	1364	1165
Phosphorus	ppm ASTM D5185m 1043	<b>877</b>	1058	929
Zinc	ppm ASTM D5185m 943	<b>1035</b>	1288	1069
Sulfur	ppm ASTM D5185m 5012	<b>3012</b>	3384	3248

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>3</b>	4	4
Sodium	ppm ASTM D5185m	<b>&lt;1</b>	2	0
Potassium	ppm ASTM D5185m >20	<b>0</b>	3	3

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.1</b>	0.2	0.2
Nitration	Abs/cm *ASTM D7624 >20	<b>5.2</b>	6.6	6.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.2</b>	20.2	19.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.4</b>	14.9	14.5
Base Number (BN)	mg KOH/g ASTM D2896 12.5	<b>8.9</b>	8.7	8.6







# OIL ANALYSIS REPORT

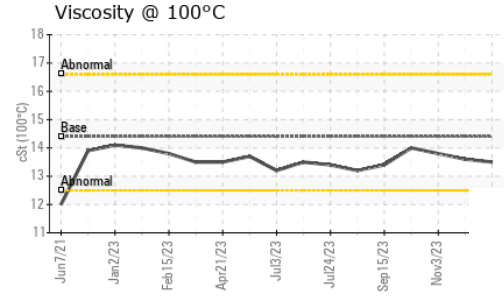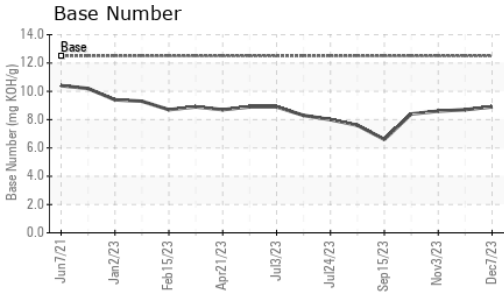

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.5</b>	13.6	13.8

## GRAPHS

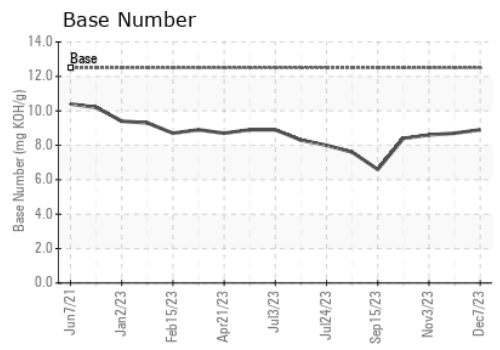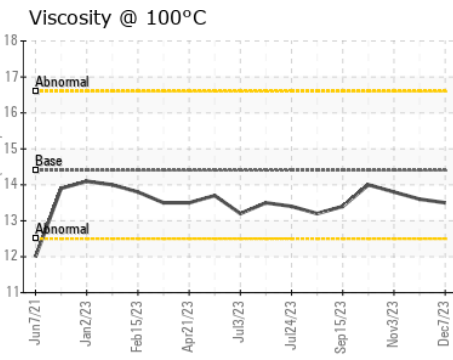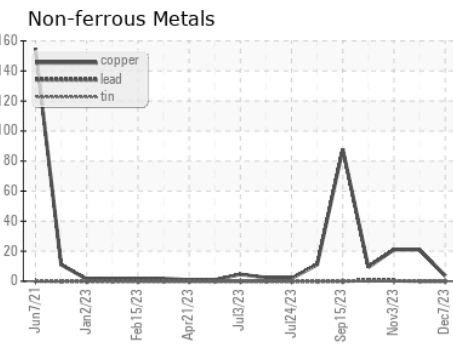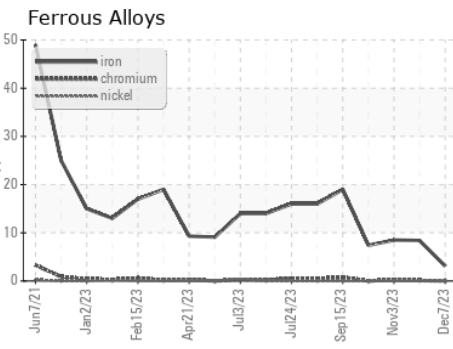

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0098444 **Received** : 11 Dec 2023  
**Lab Number** : **06030179** **Diagnosed** : 13 Dec 2023  
**Unique Number** : 10779970 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 180 - Tuscaloosa Hauling**  
 4701 12TH ST NE  
 Tuscaloosa, AL  
 US 35404  
 Contact: FREDERICK ROGERS  
 fred.rogers@gflenv.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)