


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

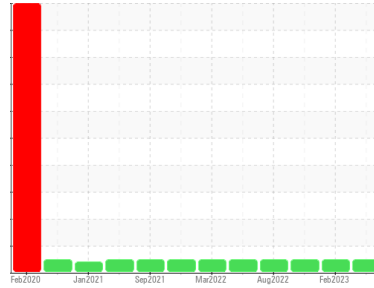

Machine Id  
**26327**  
 Component  
**Front Differential**  
 Fluid  
**PETRO CANADA TRAXON SYNTHETIC 75W90 (25 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0095552</b>	PCA0092014	PCA0084907
Sample Date	Client Info		<b>22 May 2023</b>	20 Feb 2023	21 Nov 2022
Machine Age	mls	Client Info	<b>681994</b>	657554	637722
Oil Age	mls	Client Info	<b>681994</b>	657554	637722
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>262</b>	255	244
Chromium	ppm	ASTM D5185m >10	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m >10	<b>&lt;1</b>	1	1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>4</b>	4	4
Lead	ppm	ASTM D5185m >25	<b>1</b>	2	2
Copper	ppm	ASTM D5185m >100	<b>32</b>	30	25
Tin	ppm	ASTM D5185m >10	<b>3</b>	3	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 328	<b>194</b>	188	206
Barium	ppm	ASTM D5185m 1	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185m	<b>4</b>	4	4
Magnesium	ppm	ASTM D5185m 1	<b>4</b>	4	3
Calcium	ppm	ASTM D5185m 7	<b>13</b>	12	12
Phosphorus	ppm	ASTM D5185m 1145	<b>1459</b>	1375	1344
Zinc	ppm	ASTM D5185m 3	<b>18</b>	21	20
Sulfur	ppm	ASTM D5185m 17909	<b>25219</b>	25170	24764


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	<b>44</b>	38	37
Sodium	ppm	ASTM D5185m	<b>3</b>	4	4
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT

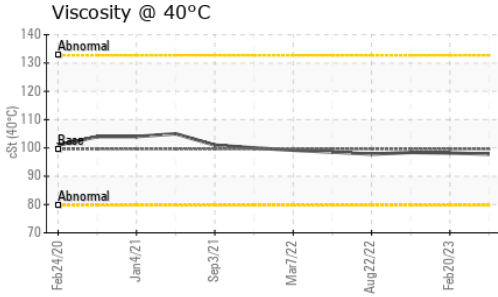




### FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D445	99.6	97.8	98.2	98.4

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

### GRAPHS

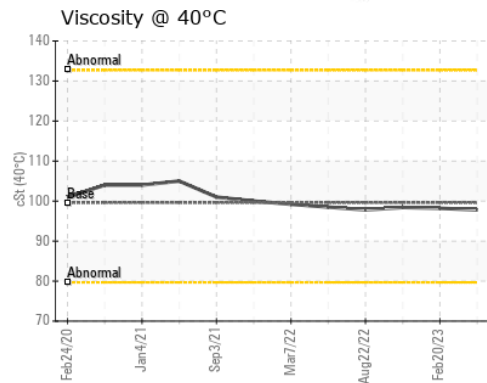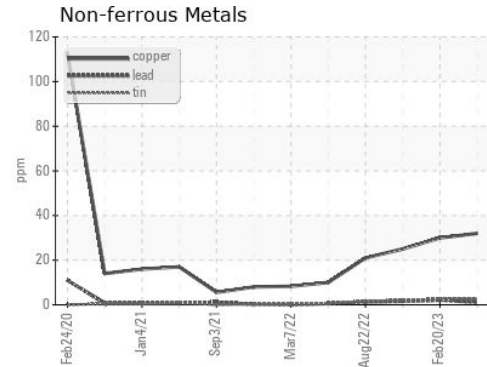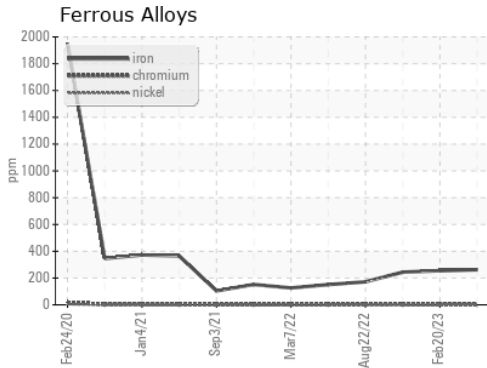

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0095552  
**Lab Number** : 06031027  
**Unique Number** : 10780818  
**Test Package** : FLEET

**PERDUE FARMS - GEORGETOWN**  
 20621 SAVANAH RD  
 GEORGETOWN, DE  
 US 19947  
 Contact: ROBERT LOCKWOOD  
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: