


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

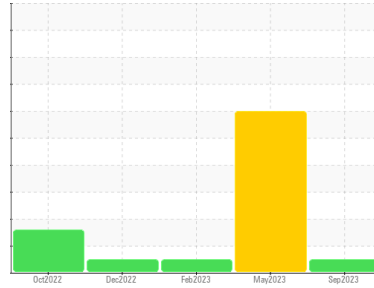

Machine Id
2126942
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0103366	PCA0099760	PCA0092860
Sample Date	Client Info			13 Sep 2023	29 May 2023	27 Feb 2023
Machine Age	mls Client Info			109271	84508	63537
Oil Age	mls Client Info			45734	20971	46463
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	SEVERE	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>100		27	13	28
Chromium	ppm ASTM D5185m	>20		<1	0	<1
Nickel	ppm ASTM D5185m	>4		1	0	<1
Titanium	ppm ASTM D5185m			1	1	6
Silver	ppm ASTM D5185m	>3		0	1	<1
Aluminum	ppm ASTM D5185m	>20		6	3	10
Lead	ppm ASTM D5185m	>40		2	5	2
Copper	ppm ASTM D5185m	>330		243	419	159
Tin	ppm ASTM D5185m	>15		2	<1	3
Vanadium	ppm ASTM D5185m			0	0	0
Cadmium	ppm ASTM D5185m			<1	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	2		0	1	7
Barium	ppm ASTM D5185m	0		0	0	0
Molybdenum	ppm ASTM D5185m	50		58	56	56
Manganese	ppm ASTM D5185m	0		<1	<1	1
Magnesium	ppm ASTM D5185m	950		875	878	755
Calcium	ppm ASTM D5185m	1050		1075	1029	1111
Phosphorus	ppm ASTM D5185m	995		849	948	750
Zinc	ppm ASTM D5185m	1180		1149	1172	990
Sulfur	ppm ASTM D5185m	2600		2653	2646	2682

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>25		6	5	7
Sodium	ppm ASTM D5185m			4	2	4
Potassium	ppm ASTM D5185m	>20		18	10	27

INFRA-RED		method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	>3		0.5	0.3	0.5
Nitration	Abs/cm *ASTM D7624	>20		10.3	8.6	9.9
Sulfation	Abs/.1mm *ASTM D7415	>30		21.4	19.3	21.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25		17.4	15.1	17.0
Base Number (BN)	mg KOH/g ASTM D2896			6.0	7.8	6.8





OIL ANALYSIS REPORT

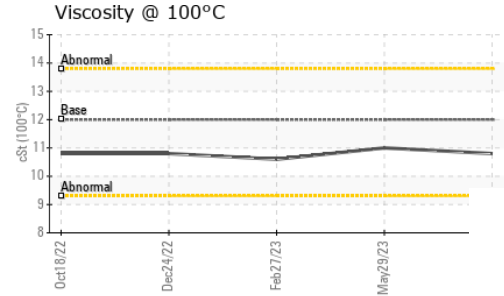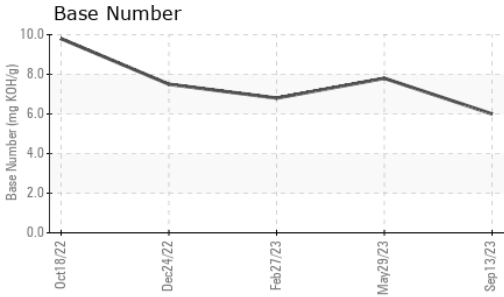

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.8	11.0

GRAPHS

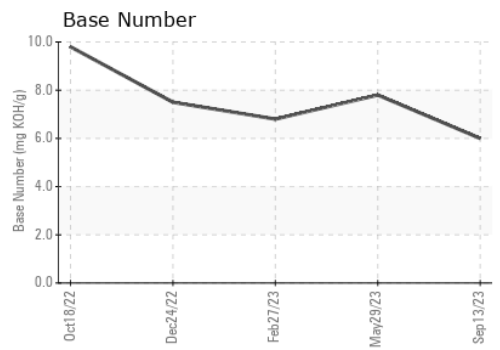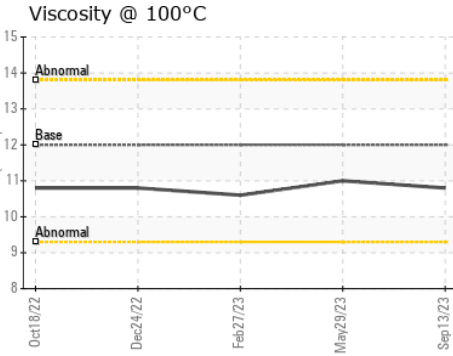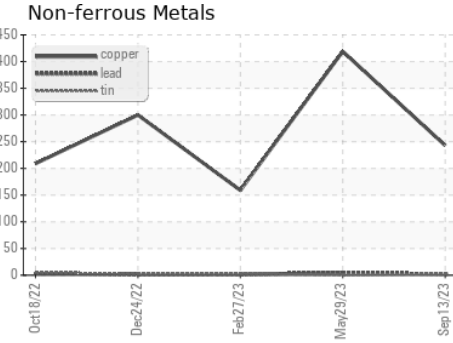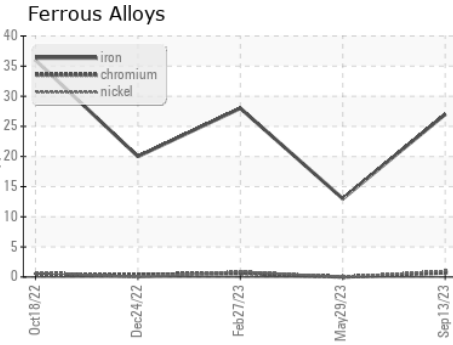

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0103366 **Received** : 11 Dec 2023
Lab Number : **06031152** **Diagnosed** : 12 Dec 2023
Unique Number : 10780943 **Diagnostician** : Wes Davis
Test Package : FLEET

PERDUE FARMS - GEORGETOWN
 20621 SAVANAH RD
 GEORGETOWN, DE
 US 19947
 Contact: ROBERT LOCKWOOD
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: