


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

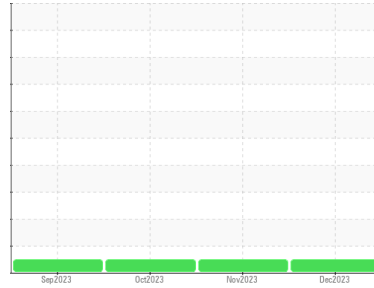

Machine Id

9

Component

Natural Gas Engine

Fluid

PETRO CANADA SENTRON LD 3000 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

Tests indicate that there is no fuel present in the oil. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | PCA0111958 | PCA0103425 | PCA0103456 |
| Sample Date | Client Info | | 04 Dec 2023 | 01 Nov 2023 | 03 Oct 2023 |
| Machine Age | hrs | Client Info | 135879 | 135094 | 134397 |
| Oil Age | hrs | Client Info | 3132 | 2347 | 1650 |
| Oil Changed | | Client Info | Not Chngd | Not Chngd | Not Chngd |
| Sample Status | | | NORMAL | NORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1 | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >50 | 4 | 2 | 4 |
| Chromium | ppm | ASTM D5185m >4 | <1 | <1 | 1 |
| Nickel | ppm | ASTM D5185m >2 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >9 | <1 | <1 | 0 |
| Lead | ppm | ASTM D5185m >30 | 2 | <1 | <1 |
| Copper | ppm | ASTM D5185m >35 | 0 | 0 | <1 |
| Tin | ppm | ASTM D5185m >4 | 0 | <1 | 0 |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|------------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m 5 | 0 | 0 | <1 |
| Barium | ppm | ASTM D5185m 1 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m 2 | 0 | 0 | 1 |
| Manganese | ppm | ASTM D5185m 1 | 0 | <1 | 0 |
| Magnesium | ppm | ASTM D5185m 5 | 11 | 10 | 10 |
| Calcium | ppm | ASTM D5185m 1220 | 1398 | 1327 | 1265 |
| Phosphorus | ppm | ASTM D5185m 298 | 296 | 295 | 278 |
| Zinc | ppm | ASTM D5185m 350 | 380 | 357 | 364 |
| Sulfur | ppm | ASTM D5185m 1995 | 2477 | 2427 | 2745 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|------------|----------|----------|
| Silicon | ppm | ASTM D5185m >+100 | 2 | 2 | 3 |
| Sodium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Potassium | ppm | ASTM D5185m >20 | 0 | 0 | <1 |
| Fuel | % | ASTM D3524 >4.0 | 0.0 | 0.0 | 0.2 |





INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 | 0 | 0 | 0 |
| Nitration | Abs/cm | *ASTM D7624 >20 | 5.1 | 4.9 | 4.7 |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | 15.5 | 15.2 | 14.6 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 >25 | 9.3 | 8.7 | 8.4 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 0.86 | 1.52 | 0.95 | 1.08 |
| Base Number (BN) | mg KOH/g | ASTM D2896 3.85 | 3.45 | 3.45 | 3.93 |









OIL ANALYSIS REPORT

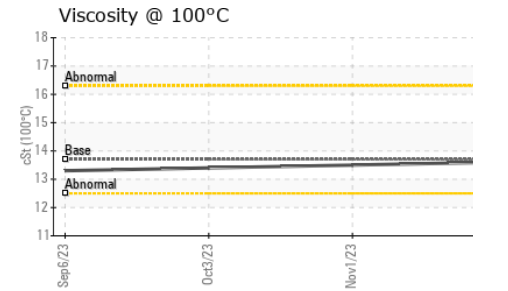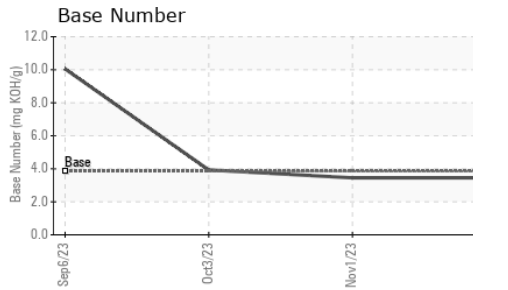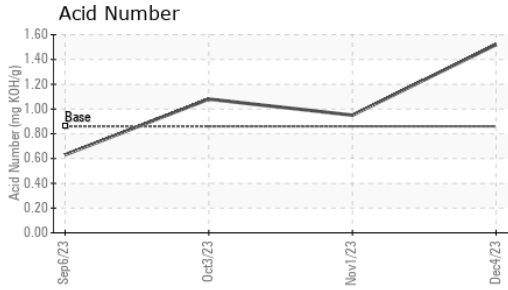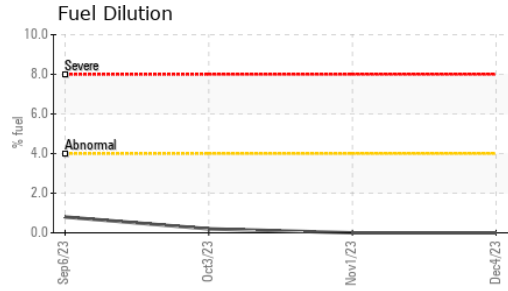

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 13.7 | 13.6 | 13.5 |

GRAPHS

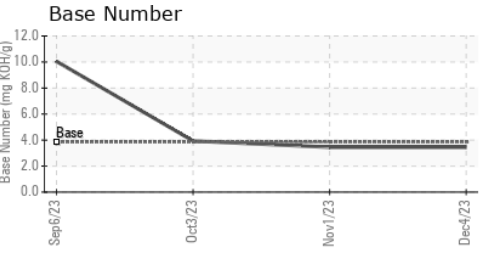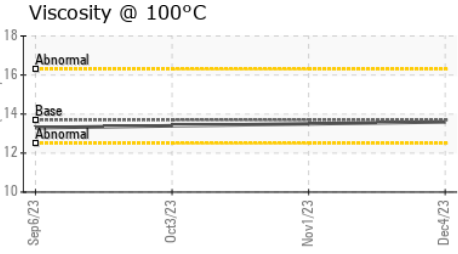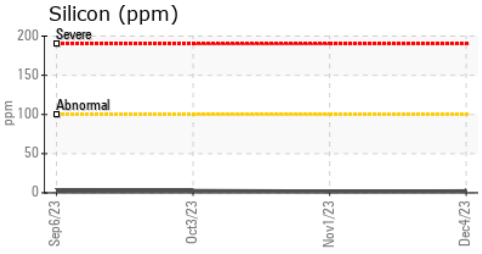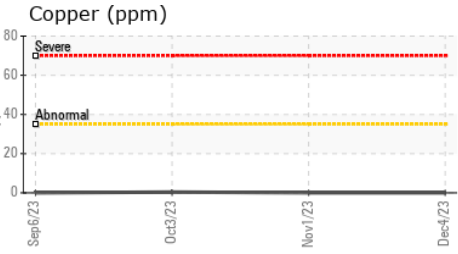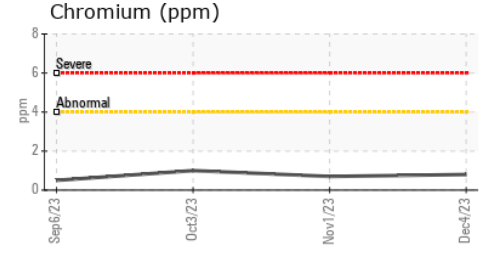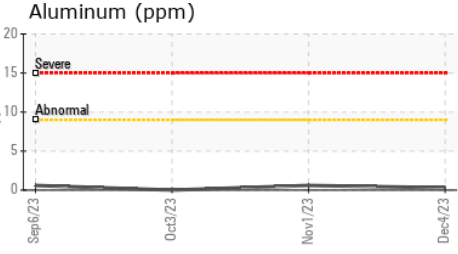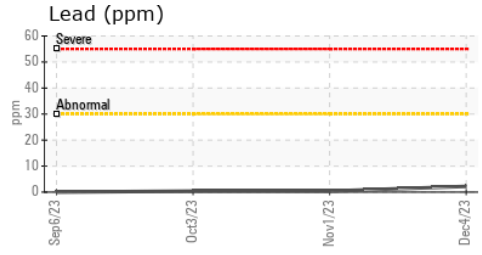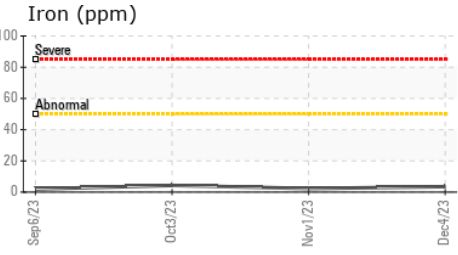

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0111958 **Recieved** : 11 Dec 2023
Lab Number : 06031784 **Diagnosed** : 18 Dec 2023
Unique Number : 10781575 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

ENERVEST OPERATING - HAYS I A
 1242 WEST WIND ROAD
 HAYS I, VA
 US 24256
 Contact: CHARLES GREGORY
 cgregory@usacompression.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: