


OIL ANALYSIS REPORT

Sample Rating Trend



DEGRADATION

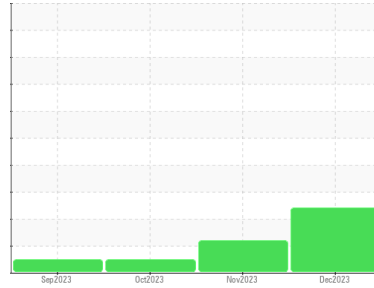

Machine Id
44

Component
Natural Gas Engine

Fluid
PETRO CANADA SENTRON LD 3000 (--- GAL)

DIAGNOSIS

▲ Recommendation

We recommend that you drain the oil from the component if this has not already been done. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

▲ Fluid Condition

The BN level is low. The oil is no longer serviceable.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0111956	PCA0103430	PCA0103461
Sample Date	Client Info		04 Dec 2023	01 Nov 2023	02 Oct 2023
Machine Age	hrs	Client Info	102073	101282	100568
Oil Age	hrs	Client Info	2454	1663	949
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	2	0	2
Chromium	ppm	ASTM D5185m >4	0	0	0
Nickel	ppm	ASTM D5185m >2	0	0	<1
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >9	<1	<1	0
Lead	ppm	ASTM D5185m >30	0	0	0
Copper	ppm	ASTM D5185m >35	0	0	<1
Tin	ppm	ASTM D5185m >4	0	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 5	0	0	0
Barium	ppm	ASTM D5185m 1	0	0	0
Molybdenum	ppm	ASTM D5185m 2	0	0	1
Manganese	ppm	ASTM D5185m 1	0	<1	0
Magnesium	ppm	ASTM D5185m 5	24	8	7
Calcium	ppm	ASTM D5185m 1220	1389	1327	1246
Phosphorus	ppm	ASTM D5185m 298	290	285	276
Zinc	ppm	ASTM D5185m 350	369	346	354
Sulfur	ppm	ASTM D5185m 1995	2206	2209	2818

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	4	1	2
Sodium	ppm	ASTM D5185m	0	<1	0
Potassium	ppm	ASTM D5185m >20	0	0	<1
Fuel	%	ASTM D3524 >4.0	0.2	0.1	0.2


INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0	0	0
Nitration	Abs/cm	*ASTM D7624 >20	13.8	10.9	6.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.8	19.2	15.0


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	23.2	17.5	10.4
Acid Number (AN)	mg KOH/g	ASTM D8045 0.86	▲ 3.56	2.06	1.62
Base Number (BN)	mg KOH/g	ASTM D2896 3.85	▲ 0.90	▲ 1.81	3.13


OIL ANALYSIS REPORT

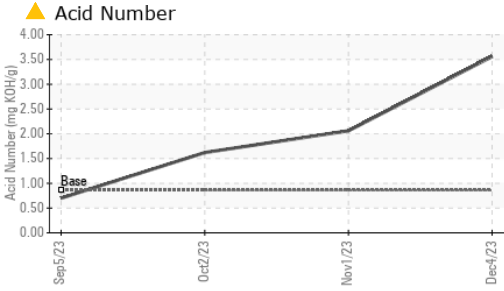










VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

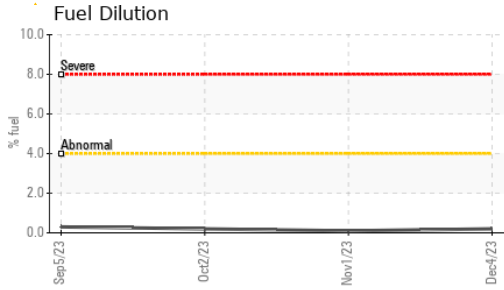

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.7	14.5	13.9

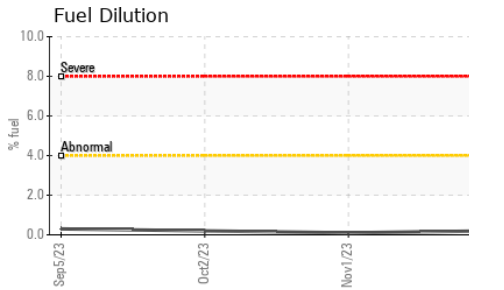

GRAPHS

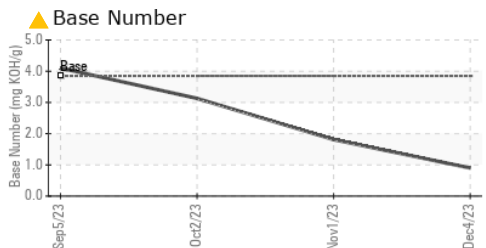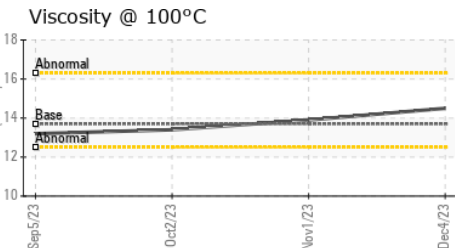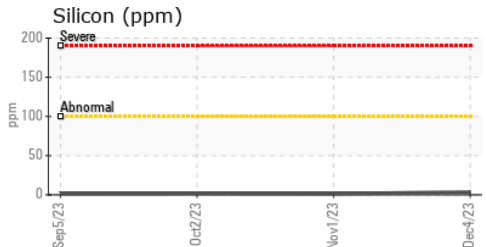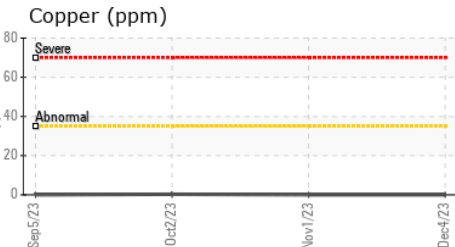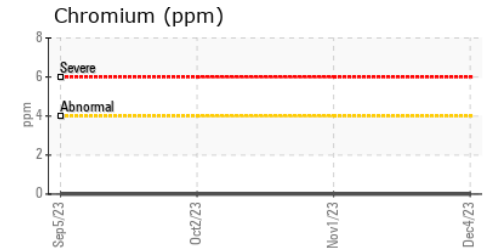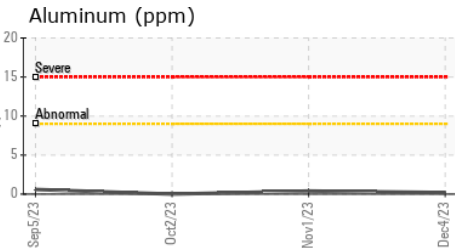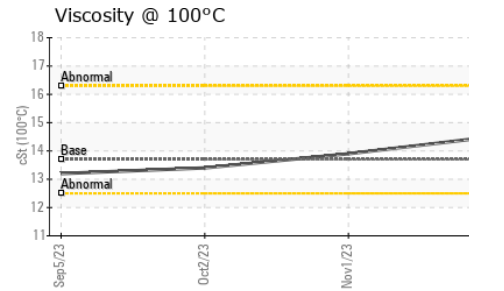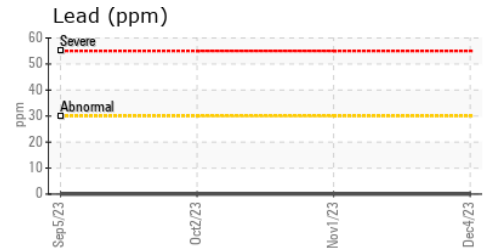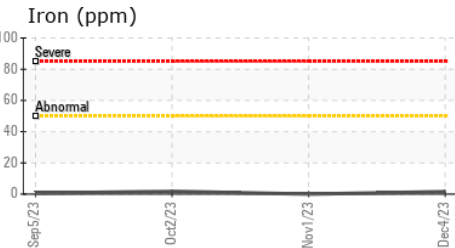

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0111956 **Received** : 11 Dec 2023
Lab Number : 06031785 **Diagnosed** : 18 Dec 2023
Unique Number : 10781576 **Diagnostician** : Doug Bogart
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

ENERVEST OPERATING - WATKINS
 3896 SUNSET HOLLOW ROAD
 GRUNDY, VA
 US 24614
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: