


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

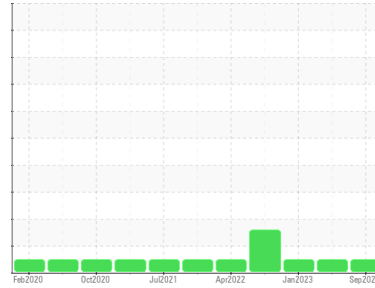

Machine Id
1926723

Component
Rear Differential

Fluid
PETRO CANADA TRAXON SYNTHETIC 75W90 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0105509	PCA0099333	PCA0090085
Sample Date	Client Info		02 Sep 2023	16 May 2023	23 Jan 2023
Machine Age	mls	Client Info	0	341556	332985
Oil Age	mls	Client Info	0	341556	332984
Oil Changed	Client Info		Not Changed	Not Changed	Not Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	164	146	146
Chromium	ppm	ASTM D5185m >10	1	1	1
Nickel	ppm	ASTM D5185m >10	10	10	11
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	3	3	3
Lead	ppm	ASTM D5185m >25	0	0	0
Copper	ppm	ASTM D5185m >100	6	2	2
Tin	ppm	ASTM D5185m >10	0	<1	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 328	273	309	300
Barium	ppm	ASTM D5185m 1	0	0	0
Molybdenum	ppm	ASTM D5185m	<1	0	<1
Manganese	ppm	ASTM D5185m	10	10	9
Magnesium	ppm	ASTM D5185m 1	0	<1	2
Calcium	ppm	ASTM D5185m 7	0	10	10
Phosphorus	ppm	ASTM D5185m 1145	1348	1359	1331
Zinc	ppm	ASTM D5185m 3	0	17	21
Sulfur	ppm	ASTM D5185m 17909	23184	22839	20731


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	25	24	23
Sodium	ppm	ASTM D5185m	7	8	8
Potassium	ppm	ASTM D5185m >20	0	2	2

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	LIGHT	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

OIL ANALYSIS REPORT

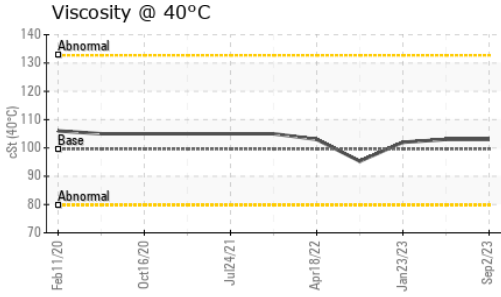




FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D445	99.6	103	103	102

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		<i>no image</i>	<i>no image</i>	<i>no image</i>
Bottom		<i>no image</i>	<i>no image</i>	<i>no image</i>

GRAPHS

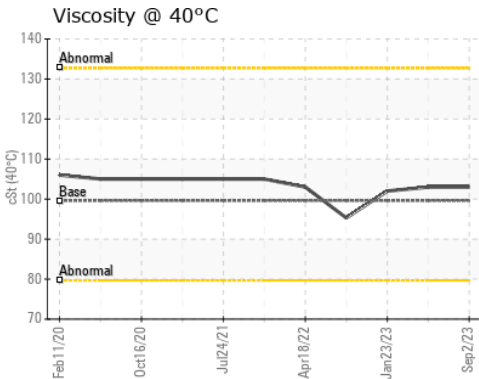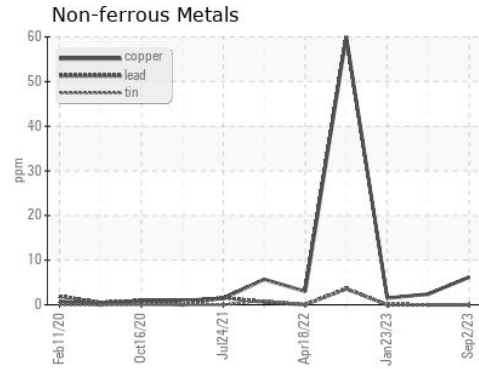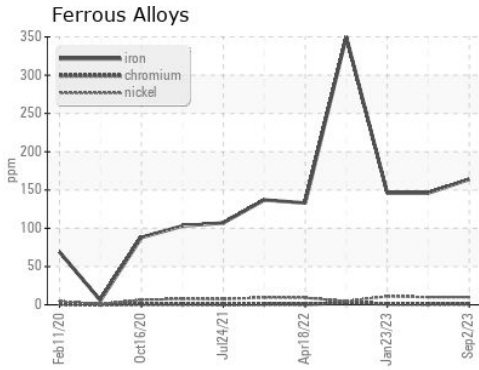

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0105509 **Received** : 11 Dec 2023
Lab Number : 06031961 **Diagnosed** : 14 Dec 2023
Unique Number : 10781752 **Diagnostician** : Sean Felton
Test Package : FLEET

PERDUE FARMS - GEORGETOWN
 20621 SAVANAH RD
 GEORGETOWN, DE
 US 19947
 Contact: ROBERT LOCKWOOD
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: