


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

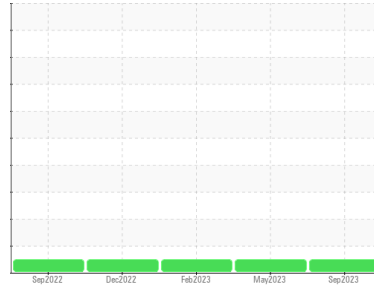

Machine Id  
**2126946**

Component  
**1 Differential**  
Fluid

**PETRO CANADA TRAXON SYNTHETIC 75W90 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0103348</b>	PCA0099325	PCA0092842
Sample Date	Client Info			<b>08 Sep 2023</b>	15 May 2023	22 Feb 2023
Machine Age	mls	Client Info		<b>103426</b>	83578	62801
Oil Age	mls	Client Info		<b>103426</b>	83578	62801
Oil Changed	Client Info			<b>Not Chngd</b>	N/A	Not Chngd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	<b>NEG</b>	NEG	NEG


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>334</b>	275	254
Chromium	ppm	ASTM D5185m	>10	<b>4</b>	4	4
Nickel	ppm	ASTM D5185m	>10	<b>4</b>	3	4
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	2	3
Lead	ppm	ASTM D5185m	>25	<b>11</b>	9	8
Copper	ppm	ASTM D5185m	>100	<b>38</b>	29	19
Tin	ppm	ASTM D5185m	>10	<b>2</b>	2	2
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	328	<b>125</b>	140	141
Barium	ppm	ASTM D5185m	1	<b>0</b>	6	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>14</b>	14	13
Magnesium	ppm	ASTM D5185m	1	<b>0</b>	2	1
Calcium	ppm	ASTM D5185m	7	<b>0</b>	23	23
Phosphorus	ppm	ASTM D5185m	1145	<b>1054</b>	1058	1044
Zinc	ppm	ASTM D5185m	3	<b>0</b>	12	20
Sulfur	ppm	ASTM D5185m	17909	<b>26406</b>	29086	23411

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<b>66</b>	52	50
Sodium	ppm	ASTM D5185m		<b>10</b>	10	10
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	3	3

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT

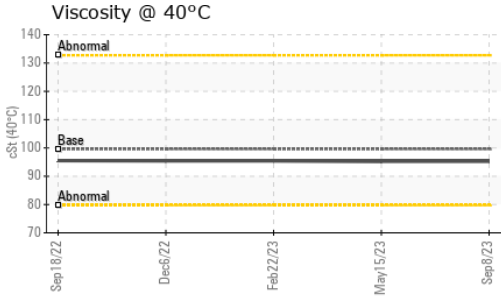




## FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D445	99.6	<b>95.2</b>	95.2	95.4

## SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

## GRAPHS

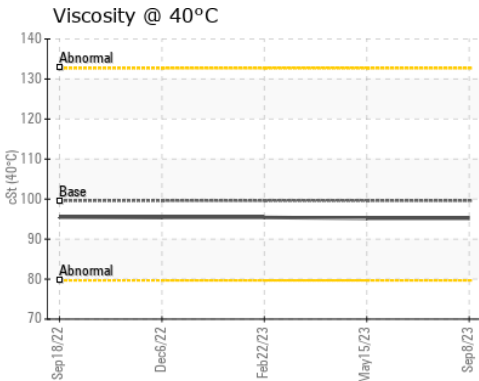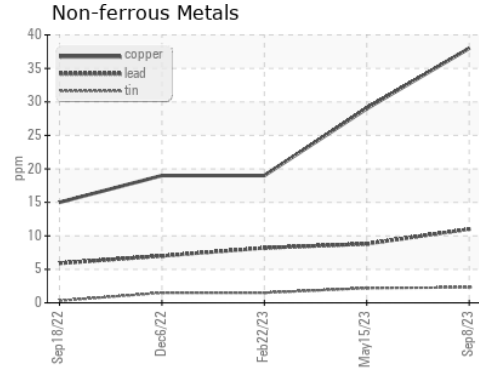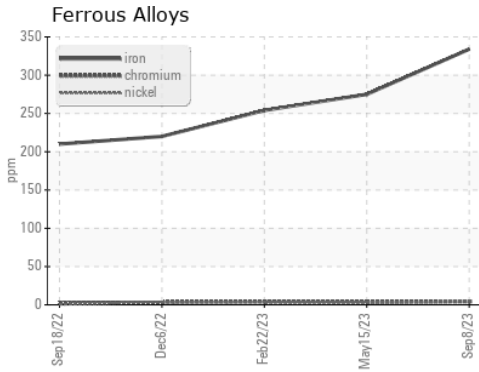

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0103348  
**Lab Number** : 06031988  
**Unique Number** : 10781779  
**Test Package** : FLEET

**PERDUE FARMS - GEORGETOWN**  
 20621 SAVANAH RD  
 GEORGETOWN, DE  
 US 19947  
 Contact: ROBERT LOCKWOOD  
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: