

# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**ROLLER**  
Machine Id  
**CATERPILLAR CB64B 2427**  
Component  
**Hydrostatic**  
Fluid  
**NOT GIVEN (--- GAL)**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0064490</b>	---	---
Sample Date	Client Info			<b>28 Nov 2023</b>	---	---
Machine Age	hrs	Client Info		<b>3397</b>	---	---
Oil Age	hrs	Client Info		<b>3397</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	---	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>10</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m		<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>50	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>2</b>	---	---
Copper	ppm	ASTM D5185m	>200	<b>8</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>61</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>4</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>37</b>	---	---
Calcium	ppm	ASTM D5185m		<b>1774</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>840</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1048</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>2702</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>7</b>	---	---
Sodium	ppm	ASTM D5185m		<b>6</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---

# OIL ANALYSIS REPORT

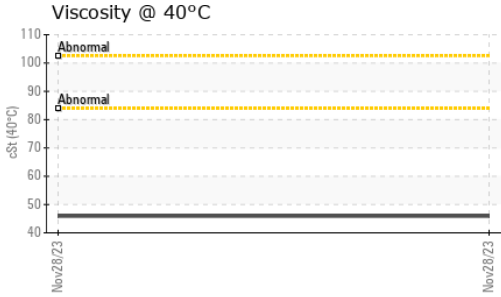









### FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	<b>45.9</b>	---	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

### GRAPHS

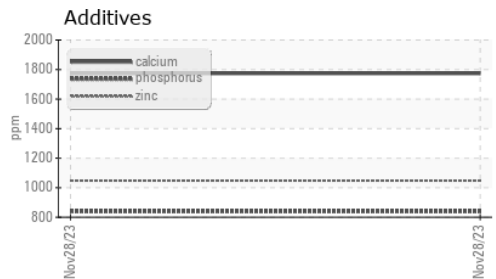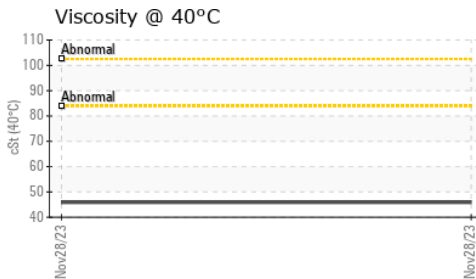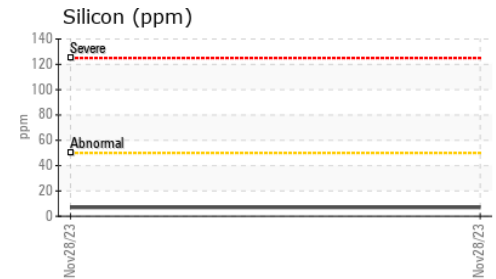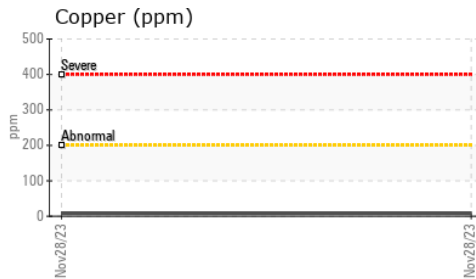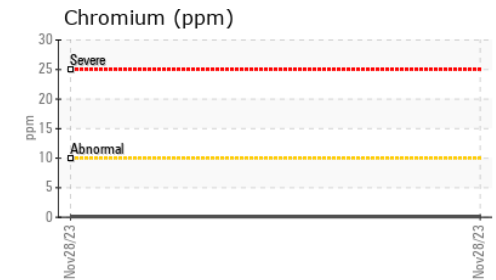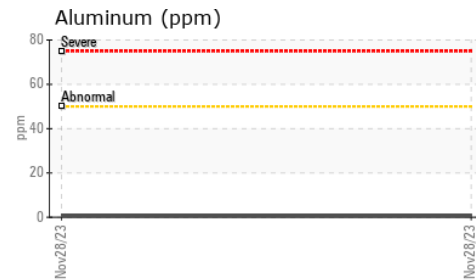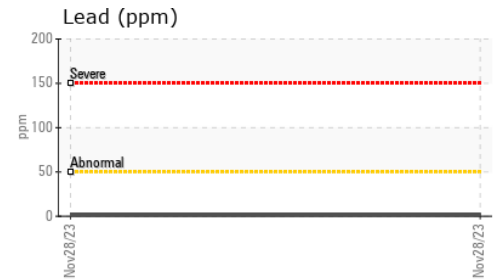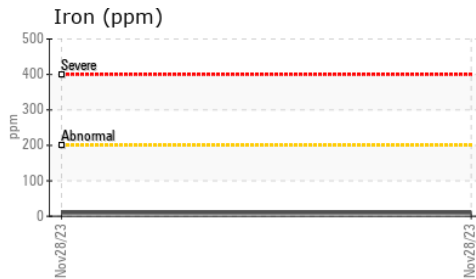

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0064490 **Received** : 11 Dec 2023  
**Lab Number** : 06032062 **Diagnosed** : 15 Dec 2023  
**Unique Number** : 10781853 **Diagnostician** : Jonathan Hester  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**D-CONSTRUCTION**  
 1488 S BROADWAY  
 COAL CITY, IL  
 US 60416  
 Contact: PAUL RUEL  
 p.ruel@dconstruction.com

T:  
F: