


# OIL ANALYSIS REPORT

## Sample Rating Trend

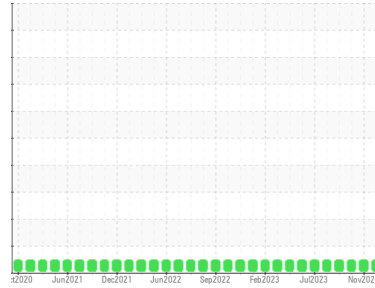

**NORMAL**

Machine Id  
**2120559**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0112341</b>	PCA0108145	PCA0104889
Sample Date	Client Info			<b>06 Dec 2023</b>	07 Nov 2023	04 Oct 2023
Machine Age	hrs	Client Info		<b>8962</b>	8962	8962
Oil Age	hrs	Client Info		<b>8962</b>	8962	8962
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>8</b>	9	5
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	2	0
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>330	<b>2</b>	0	<1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>7</b>	8	8
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	1
Molybdenum	ppm	ASTM D5185m	50	<b>59</b>	62	63
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	950	<b>918</b>	1010	865
Calcium	ppm	ASTM D5185m	1050	<b>1076</b>	1093	1040
Phosphorus	ppm	ASTM D5185m	995	<b>1053</b>	1092	984
Zinc	ppm	ASTM D5185m	1180	<b>1299</b>	1355	1177
Sulfur	ppm	ASTM D5185m	2600	<b>3194</b>	3323	3149

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	5	3
Sodium	ppm	ASTM D5185m		<b>3</b>	<1	0
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.1</b>	7.2	6.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.6</b>	18.0	17.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.2</b>	14.4	13.8
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.3</b>	8.4	8.5





# OIL ANALYSIS REPORT

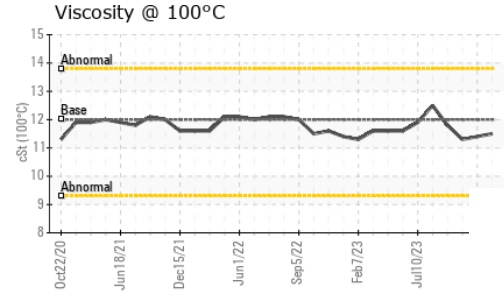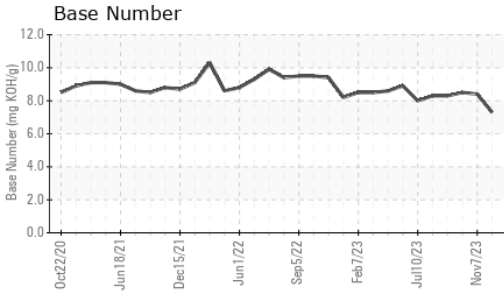

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.5</b>	11.4	11.3

## GRAPHS

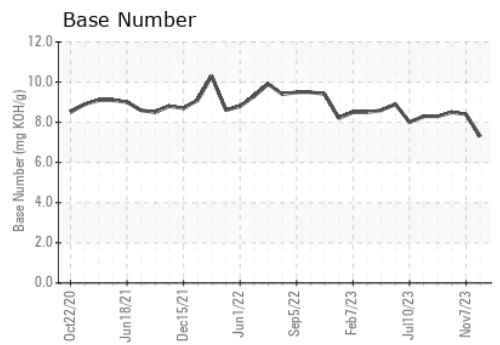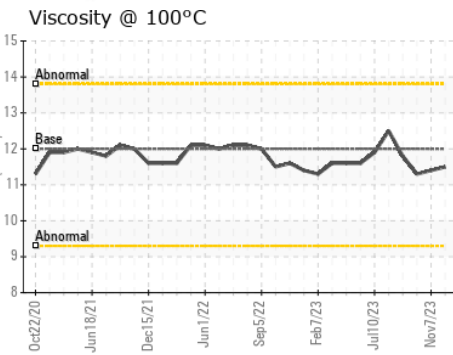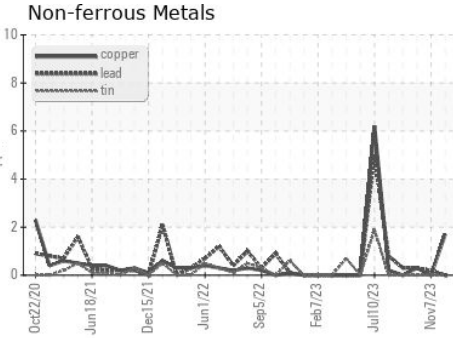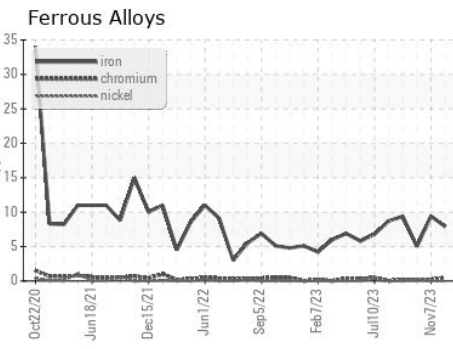

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0112341 **Received** : 12 Dec 2023  
**Lab Number** : **06032178** **Diagnosed** : 13 Dec 2023  
**Unique Number** : 10781969 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - DILLON**  
 2047 HWY 9 WEST  
 DILLON, SC  
 US 29536  
 Contact: KEVIN HOOKS  
 kevin.hooks@perdue.com  
 T: (843)841-8069  
 F: (843)841-8070

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)