


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

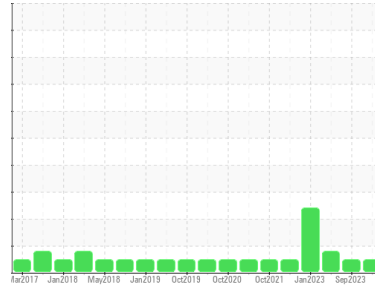

Machine Id  
**VOLVO TRACTOR 26468 (S/N BM152516)**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (46 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>PCA0108054</b>	PCA0104016	PCA0099011	
Sample Date	Client Info	<b>07 Dec 2023</b>	14 Sep 2023	07 Jun 2023	
Machine Age	mls	Client Info	<b>471416</b>	459332	445858
Oil Age	mls	Client Info	<b>11926</b>	13474	22551
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	MARGINAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >6.0	<b>&lt;1.0</b>	<1.0	▲ 3.8
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>8</b>	13	10
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm ASTM D5185m >2	<b>1</b>	1	0
Titanium	ppm ASTM D5185m	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >25	<b>2</b>	4	<1
Lead	ppm ASTM D5185m >40	<b>0</b>	2	<1
Copper	ppm ASTM D5185m >330	<b>2</b>	2	<1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>&lt;1</b>	5	60
Barium	ppm ASTM D5185m 0	<b>0</b>	3	0
Molybdenum	ppm ASTM D5185m 50	<b>57</b>	64	57
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 950	<b>950</b>	952	493
Calcium	ppm ASTM D5185m 1050	<b>1060</b>	1295	1624
Phosphorus	ppm ASTM D5185m 995	<b>1046</b>	1086	888
Zinc	ppm ASTM D5185m 1180	<b>1282</b>	1299	1108
Sulfur	ppm ASTM D5185m 2600	<b>2906</b>	3097	3460

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	6	6
Sodium	ppm ASTM D5185m	<b>6</b>	10	4
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	2	4



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.1</b>	0.2	0.1
Nitration	Abs/cm *ASTM D7624 >20	<b>8.5</b>	8.6	7.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.1</b>	20.7	19.4

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>18.0</b>	17.9	15.8
Base Number (BN)	mg KOH/g ASTM D2896	<b>6.2</b>	5.9	8.5





# OIL ANALYSIS REPORT

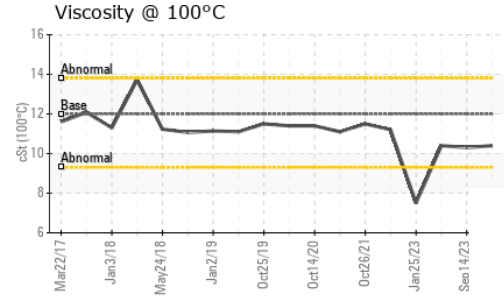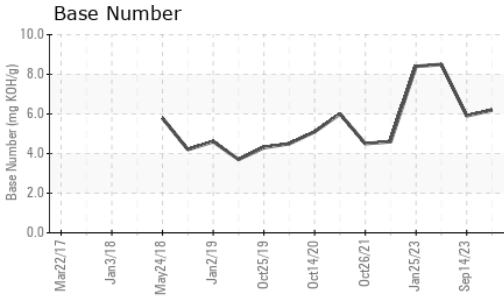

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>10.4</b>	10.3	10.4

## GRAPHS

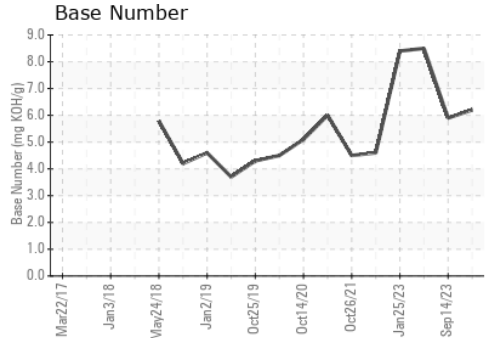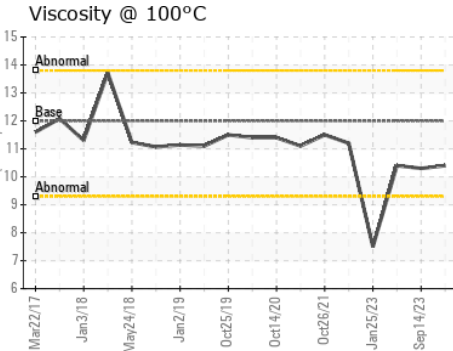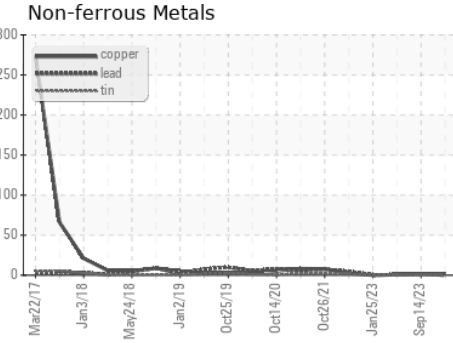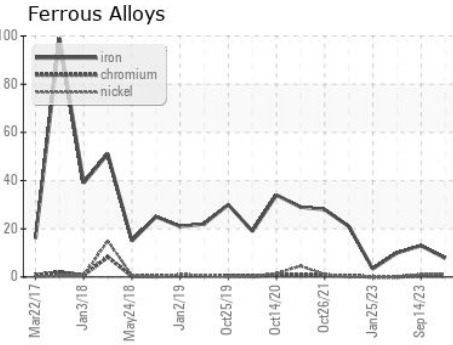

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0108054 **Received** : 12 Dec 2023  
**Lab Number** : **06032230** **Diagnosed** : 13 Dec 2023  
**Unique Number** : 10782021 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - Lewiston**  
 210 GRIFFINS QUARTER RD  
 LEWISTON, NC  
 US 27849  
 Contact: NELSON WALLACE  
 nelson.wallace2@perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)