




PROBLEM SUMMARY

Sample Rating Trend



FUEL



Machine Id
547M
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

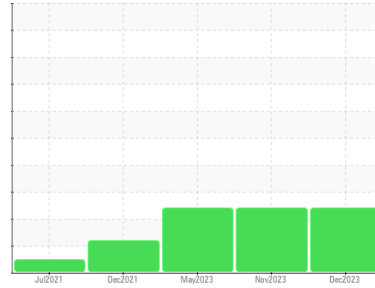

COMPONENT CONDITION SUMMARY

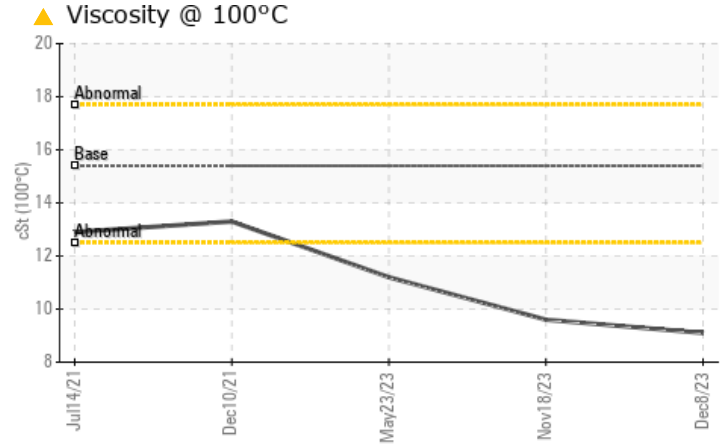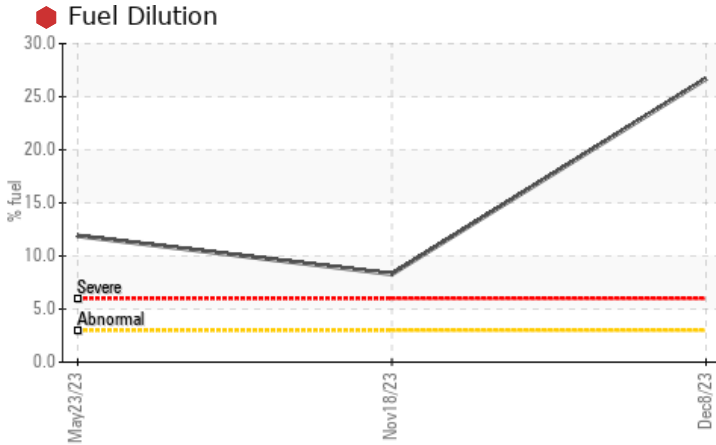

RECOMMENDATION

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	SEVERE
Fuel	%	ASTM D3524	>3.0	26.7	8.3	11.9
Visc @ 100°C	cSt	ASTM D445	15.4	9.1	9.6	11.2

Customer Id: GFL415
Sample No.: GFL0105644
Lab Number: 06032251
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

18 Nov 2023 Diag: Jonathan Hester

FUEL



We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report



23 May 2023 Diag: Wes Davis

FUEL



We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

view report



10 Dec 2021 Diag: Jonathan Hester

GLYCOL



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is negative. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

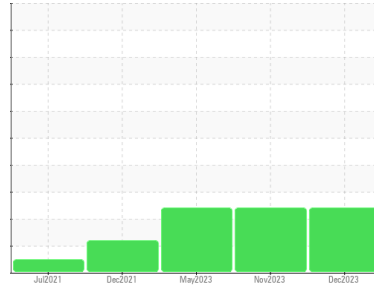

FUEL



Machine Id
547M
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0105644	GFL0089168	GFL0081377
Sample Date	Client Info	08 Dec 2023	18 Nov 2023	23 May 2023
Machine Age	hrs	14850	14779	14124
Oil Age	hrs	14779	14124	12499
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		SEVERE	SEVERE	SEVERE

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	95	88	89
Chromium	ppm ASTM D5185m >20	6	5	4
Nickel	ppm ASTM D5185m >2	<1	1	1
Titanium	ppm ASTM D5185m >2	0	<1	2
Silver	ppm ASTM D5185m >2	0	0	<1
Aluminum	ppm ASTM D5185m >20	6	6	7
Lead	ppm ASTM D5185m >40	3	4	5
Copper	ppm ASTM D5185m >330	4	3	4
Tin	ppm ASTM D5185m >15	1	1	2
Antimony	ppm ASTM D5185m	---	---	---
Vanadium	ppm ASTM D5185m	0	0	<1
Cadmium	ppm ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	0	0	5
Barium	ppm ASTM D5185m 0	0	9	0
Molybdenum	ppm ASTM D5185m 60	38	44	51
Manganese	ppm ASTM D5185m 0	2	1	1
Magnesium	ppm ASTM D5185m 1010	647	634	821
Calcium	ppm ASTM D5185m 1070	710	757	948
Phosphorus	ppm ASTM D5185m 1150	718	713	827
Zinc	ppm ASTM D5185m 1270	880	886	1046
Sulfur	ppm ASTM D5185m 2060	2003	2249	2702

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	8	8	6
Sodium	ppm ASTM D5185m	10	5	8
Potassium	ppm ASTM D5185m >20	1	5	3
Fuel	% ASTM D3524 >3.0	26.7	8.3	11.9

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	2.5	2.3	1.7
Nitration	Abs/cm *ASTM D7624 >20	17.1	16.1	14.5
Sulfation	Abs/.1mm *ASTM D7415 >30	28.6	27.5	24.0

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	32.1	29.0	23.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	6.1	7.1	7.5







OIL ANALYSIS REPORT

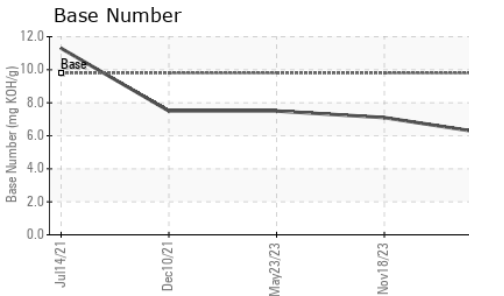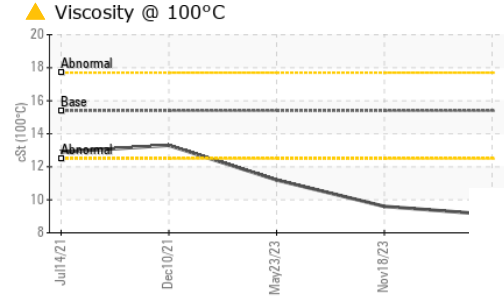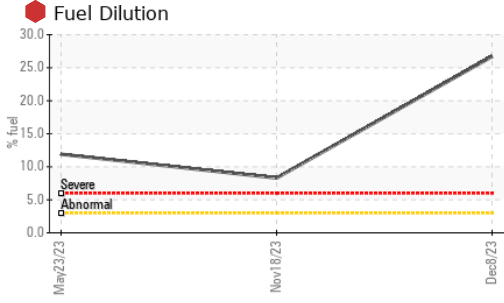

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 9.1	▲ 9.6	▲ 11.2

GRAPHS

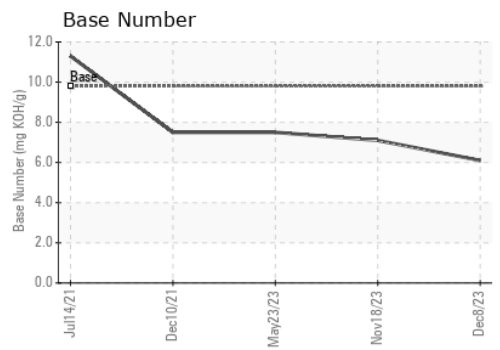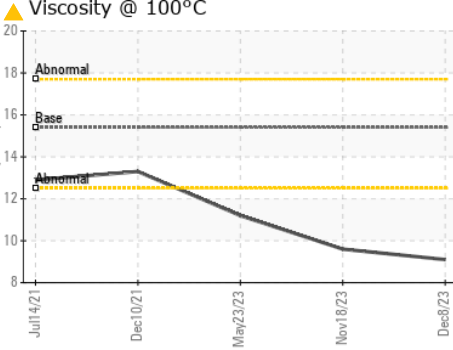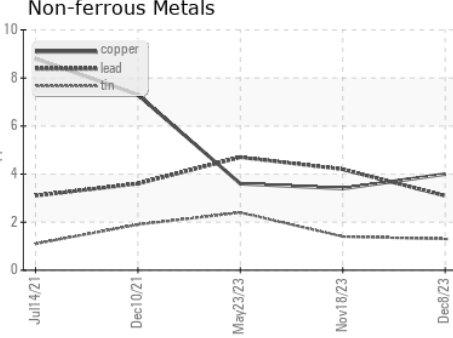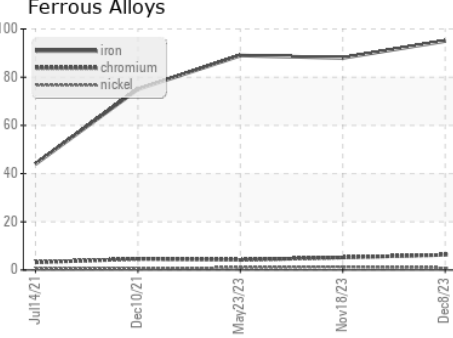

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0105644 **Received** : 12 Dec 2023
Lab Number : 06032251 **Diagnosed** : 19 Dec 2023
Unique Number : 10782042 **Diagnostician** : Jonathan Hester
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 415 - Michigan East
 6200 Elmridge
 Sterling Heights, MI
 US 48313
 Contact: Frank Wolak
 fwolak@gflenv.com
 T: (586)825-9514
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)